

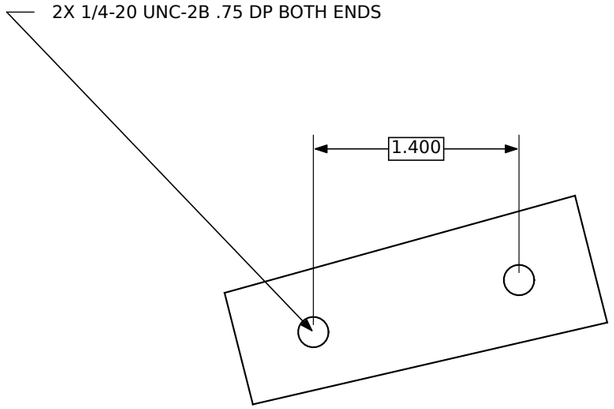



-1 TOP TIE: SIDE VIEW 1:1

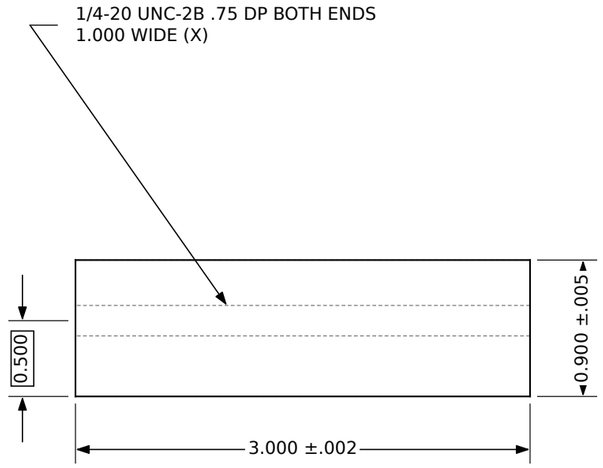

-2 SPACER (FWD) 1:1

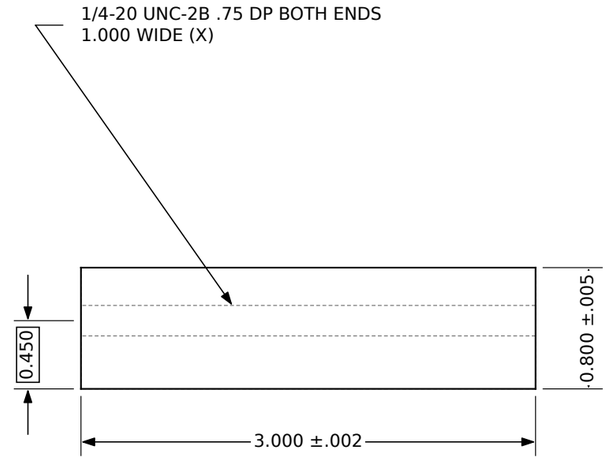

-3 SPACER (AFT) 1:1

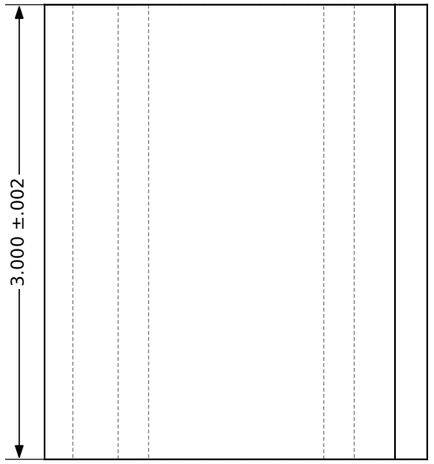

-1 TOP VIEW 1:1

NOTES:

1. ALL THREE PARTS SET THE CHEEK SPACING: LENGTH 3.000 +-.002, END FACES PARALLEL .002 AND PERPENDICULAR .002 TO THE HOLE AXES.
2. -1 TOP TIE: FACES ARE RADIAL LINES AND ARCS ABOUT THE PITCH AXIS (13.0 TO 15.5 DEG, R17.4 TO R19.8); STRAIGHT CHORDS ARE ACCEPTABLE (PROFILE .03).
3. 1/4-20 UNC-2B .75 DEEP BOTH ENDS ON ALL HOLES (CHEEK BOLTS).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

NEXT ASSY: WT-6C-400 PITCH SECTOR ASSY

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **TIE, TOP (-1) / SPACERS (-2, -3)**				CHECKED	APPROVED
MATERIAL: 6061-T6 ALUMINUM				FINISH: CLEAR ANODIZE TYPE II	
DWG NO.: **WT-6C-404**	REV: **A**	SIZE: B	SCALE: 1:1	WEIGHT: 0.55 lb	SHEET: 28 OF 36