
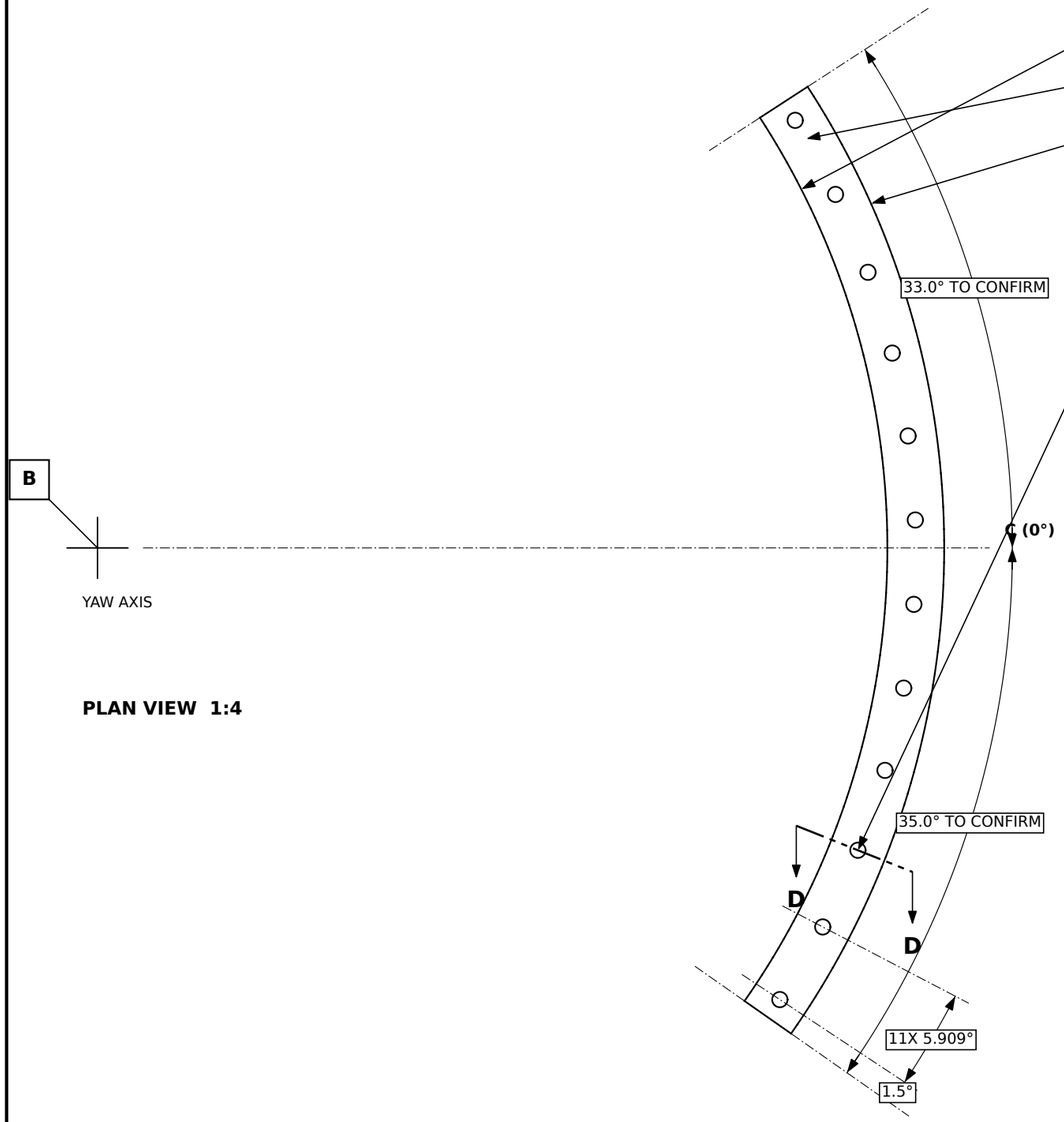



**PLAN VIEW 1:4**

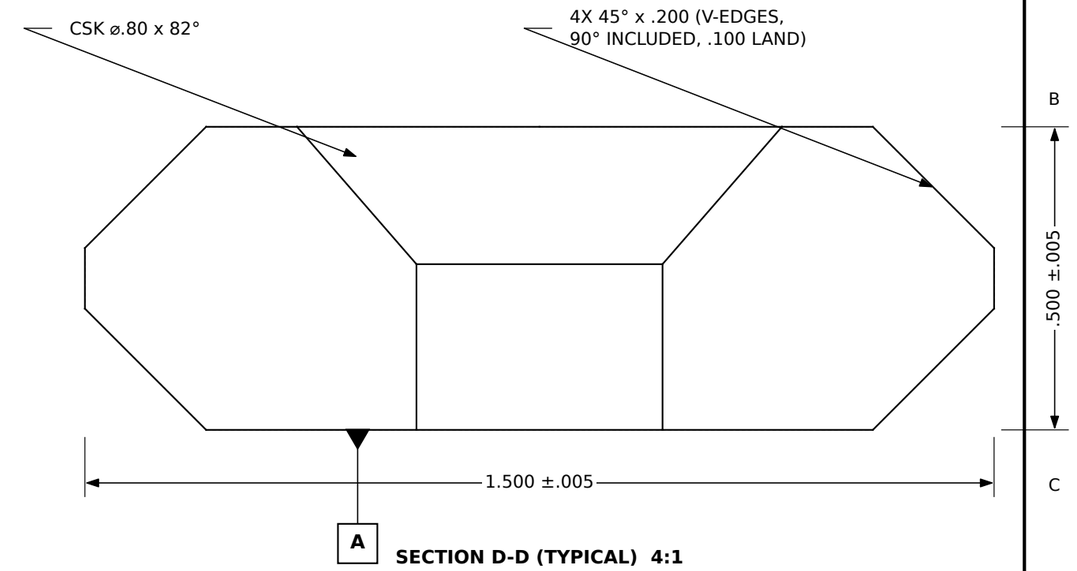


**SECTION D-D (TYPICAL) 4:1**

**PRELIMINARY - TO CONFIRM**

**NOTES:**

1. DIMENSIONS MARKED TO CONFIRM DEPEND ON THE DOWNSTREAM BAY FLOOR HEIGHT/WIDTH AND THE SPACE UNDER THE TEST-SECTION EXIT; VERIFY ON THE TUNNEL BEFORE MACHINING.
2. DATUM A = BOTTOM FACE. DATUM B = YAW AXIS (CENTRE OF ALL ARCS, VERTICAL THROUGH THE BALANCE MOMENT CENTRE). DATUM C = PLAN ANGLE 0 DEG (+X, DOWNSTREAM ALONG THE TUNNEL AXIS). ANGLES ARE PLAN ANGLES FROM C TOWARD +Y.
3. V-EDGES (BOTH SIDES) ARE THE WHEEL TRACKS: 90 DEG INCLUDED, Ra 32 µin, NO STEPS ALONG THE ARC. CUT THE ARCS ON A CNC MILL OR WATERJET + FINISH PASS FROM ONE CENTRE.
4. INSTALL CONCENTRIC WITH THE YAW AXIS WITHIN .005 USING A RADIUS BAR PIVOTING ON A PIN AT THE YAW AXIS; DRILL THE FLOOR THROUGH THE PART.
5. MATCH THE V-EDGE TO THE PURCHASED V-WHEEL (1.00 OD, 90 DEG GROOVE); CONFIRM WITH THE VENDOR DRAWING.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

NEXT ASSY: WT-6C-500 YAW CARRIAGE ASSY

| | | | | | |
|---|---|---|---|---|---|
| PROJECT: Wind tunnel - motorized 6-component sting balance | | | | DRAWN / DATE: Claude (AI-generated) 2026-10-02 | |
| TITLE: **RAIL, YAW, OUTER (R21.6)** | | | | CHECKED | APPROVED |
| MATERIAL: 6061-T6 ALUMINUM, .500 PLATE | | | | FINISH: HARD ANODIZE TYPE III (V-EDGES) | |
| DWG NO.: **WT-6C-502** | REV: **A** | SIZE: B | SCALE: 1:4 / 4:1 | WEIGHT: 1.80 lb | SHEET: 32 OF 36 |