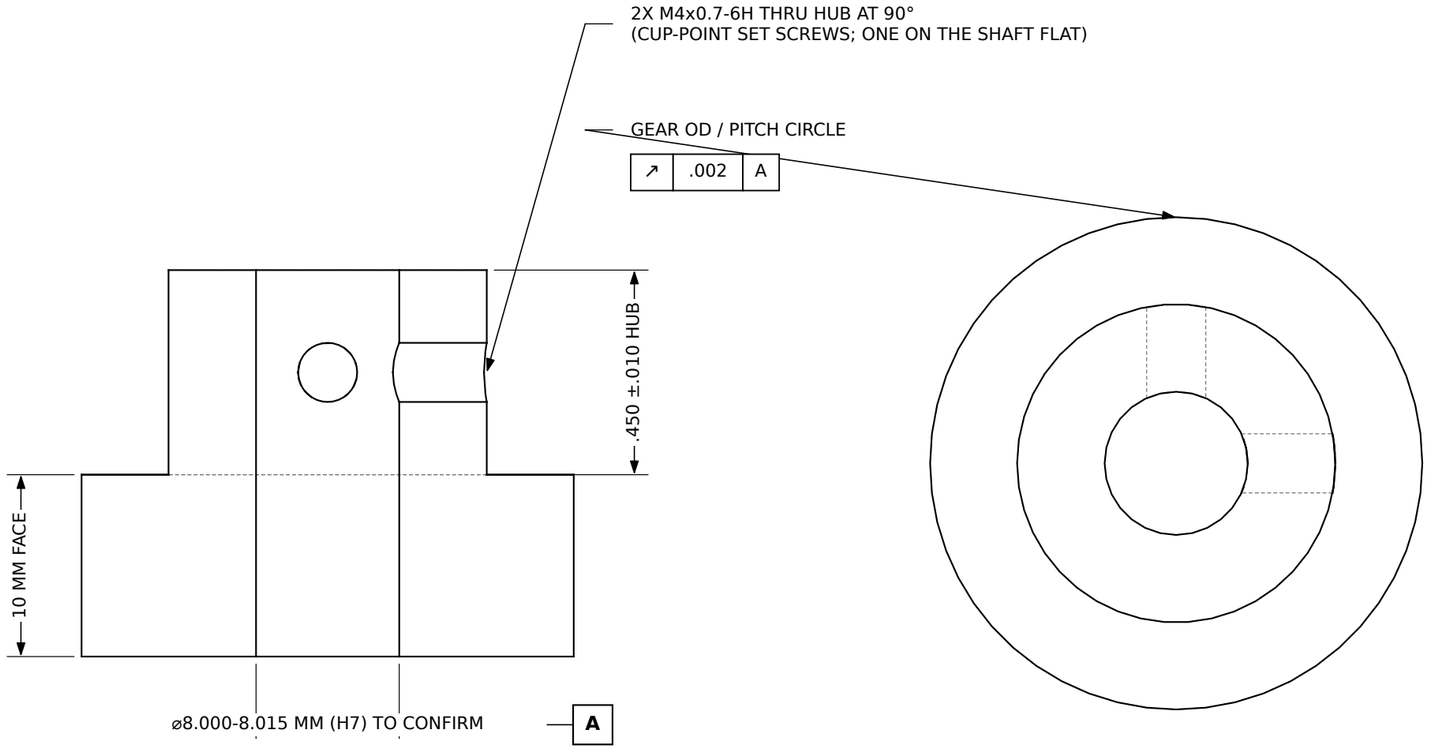


SECTION A-A 3:1

TOP VIEW 3:1

GEAR DATA	
MODULE / PA	1.25 mm / 20°
TEETH	20
PITCH DIA	25.000 mm (.984 in)
OUTSIDE DIA	27.500 mm (1.083 in)
FACE	10 mm
MATES	WT-6C-503 RACK

PRELIMINARY - TO CONFIRM

NOTES:

1. PURCHASE A STOCK m1.25 x 20T x 10 MM FACE STEEL SPUR GEAR WITH HUB (e.g. KHK SS1.25-20 OR EQUIVALENT). MODIFY ONLY: BORE, SET SCREWS, HUB LENGTH.
2. BORE SIZE AND KEY / FLAT TO SUIT THE 30:1 WORM GEARMOTOR OUTPUT SHAFT (VENDOR DRAWING, TO CONFIRM). 8 MM SHOWN.
3. THE GEAR RUNS AT RAIL LEVEL, 1.45 IN BELOW THE CARRIAGE PLATE TOP: IF THE GEARMOTOR SHAFT IS SHORTER, ADD A SHAFT EXTENSION + RIGID COUPLING (TO CONFIRM).
4. MESH WITH THE FLOOR RACK WT-6C-503 AT CENTRE RADIUS 20.092; BACKLASH .002-.004.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

NEXT ASSY: WT-6C-500 YAW CARRIAGE ASSY

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **PINION, YAW (MODIFIED STOCK GEAR)**				CHECKED	APPROVED
MATERIAL: STEEL SPUR GEAR, m1.25 20T 20° PA, WITH HUB				FINISH: AS SUPPLIED; BLACK OXIDE	
DWG NO.: **WT-6C-505**	REV: **A**	SIZE: B	SCALE: 3:1	WEIGHT: 0.13 lb	SHEET: 35 OF 36