


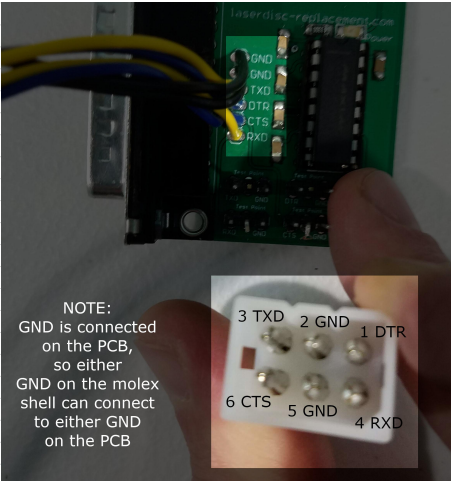

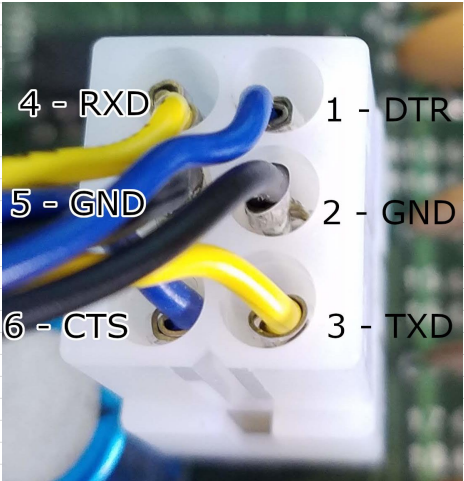


I/O CABLE					
Length	1 meter				
Wire	22AWG (recommended)				
<b>Molex Pin Number</b>	<b>PCB solder connection</b>				
1	DTR				
2	GND				
3	TXD				
4	RXD				
5	GND				
6	CTS				
					
					
					
					
<p>NOTE: GND is connected on the PCB, so either GND on the molex shell can connect to either GND on the PCB</p> 					
					
POWER CABLE					
Length	15 centimeters (minimum!)				
Wire	24 AWG, 1.57mm max diameter insulation ( example is DigiKey CN482R-25-ND )				
