KANALTEK
NO DIG TECHNOLOGIES

TRENCHLESS REHABILITATION TECHNOLOGIES FOR UNDERGROUND CONDUITS


- CIPP Ultraviolet (UV) Technology
- PVC FOLD & FORM Technology
- SPRAYING Technology
  (Drinking Water- Pressure Pipes)
- HOSE LINER Technology
  (Drinking Water- Pressure Pipes)



KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

- **Leading Organization in TrenchlessTechnologies**
- **Pipe Rehabilitation since 2004**
- **Experienced and trained staff**
- **State-of-the-art machinery and equipment**
- **850,000 meters of pipe rehabilitation**

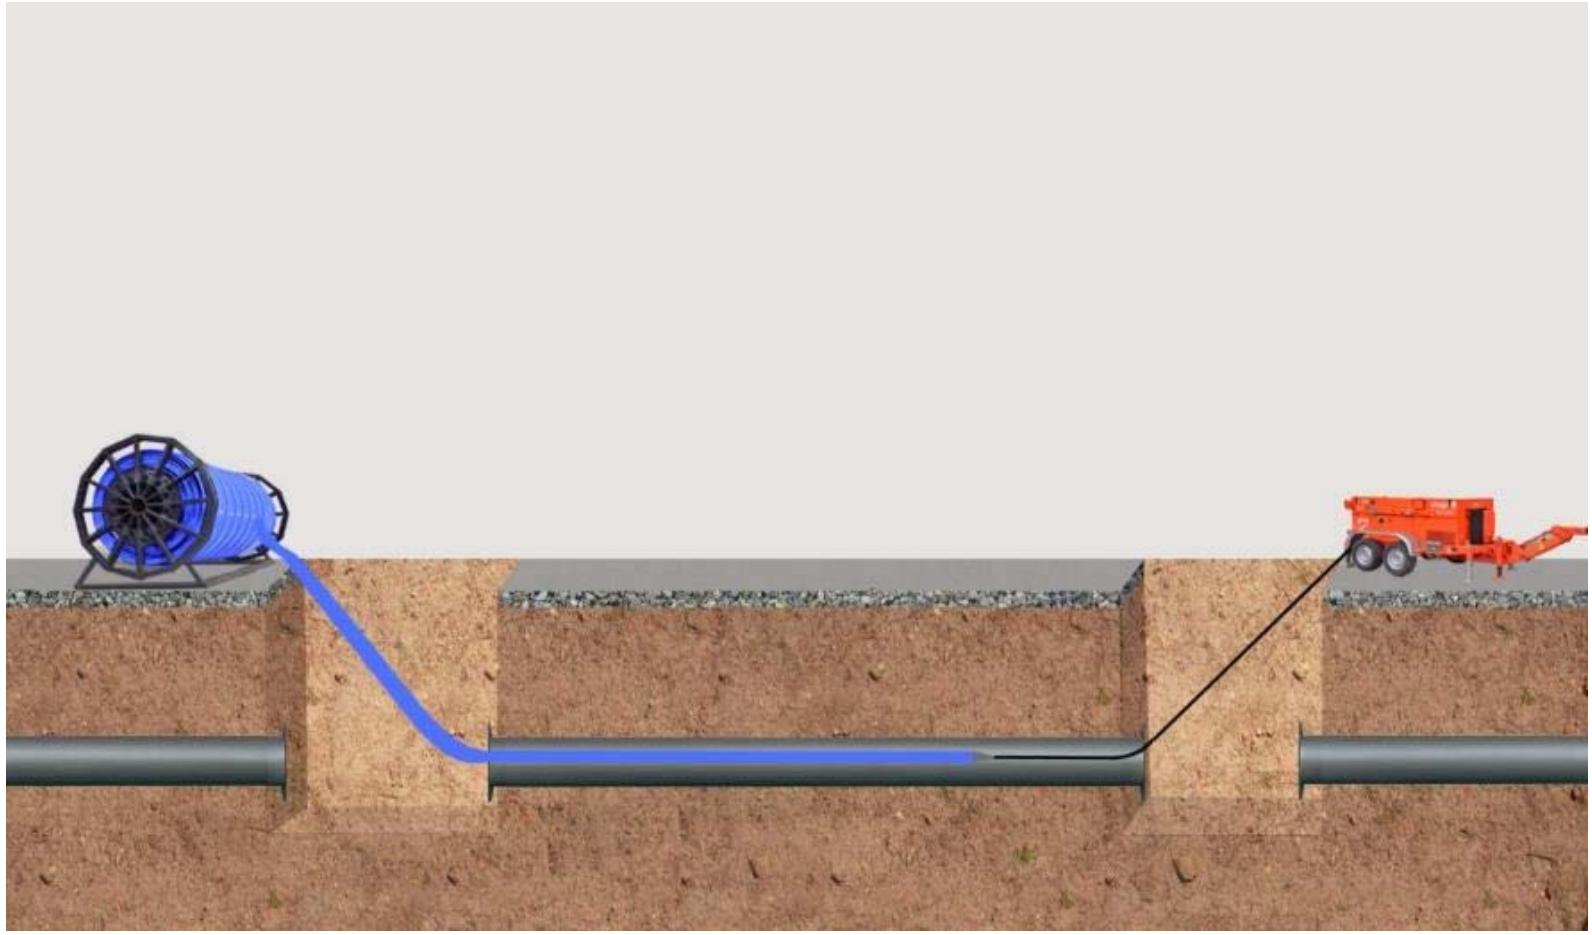

KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

CONTENTS



1 Hose Liner Rehabilitation Technology

2 Advantages of Hose Liner Rehabilitation Technology


3 Hose Liner Rehabilitation Technical Information


4 Implementation Procedures & Key Points

KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

HOSE LINER REHABILITATION TECHNOLOGY

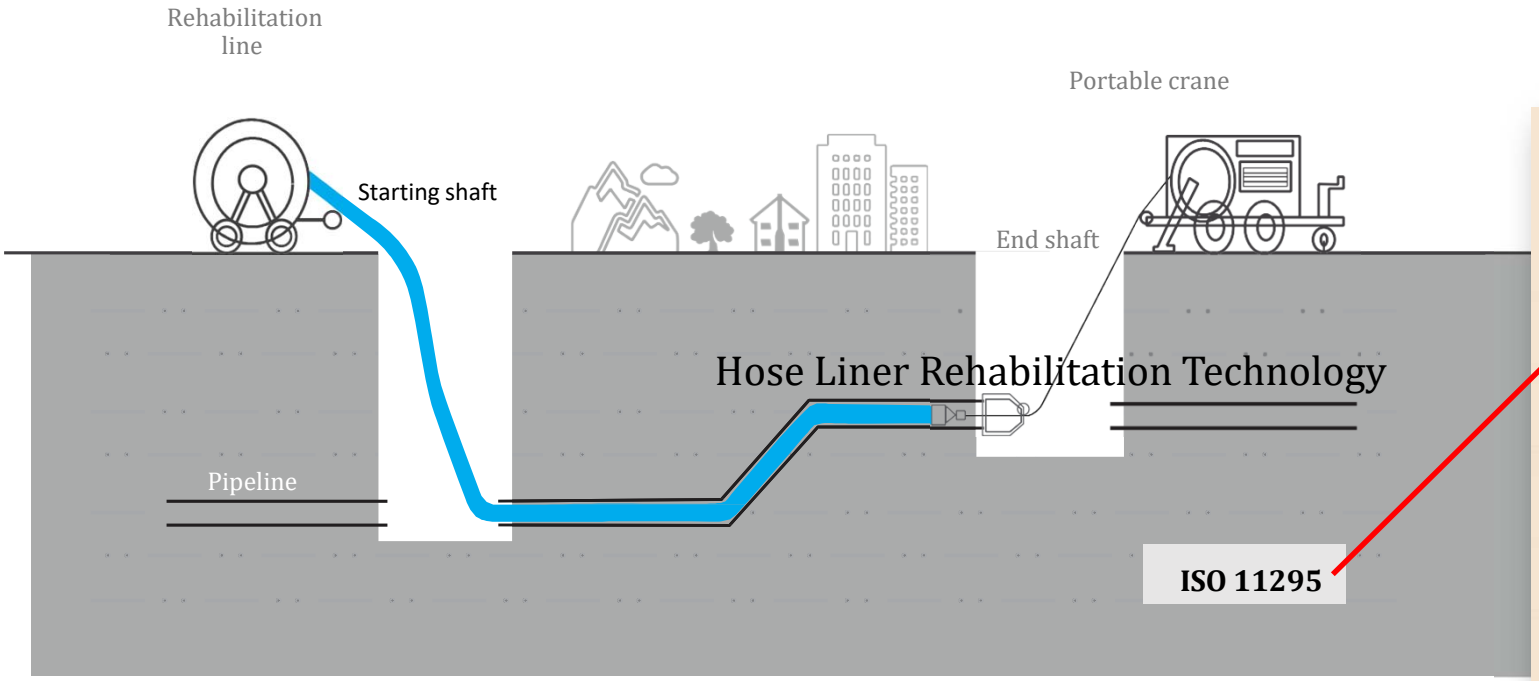

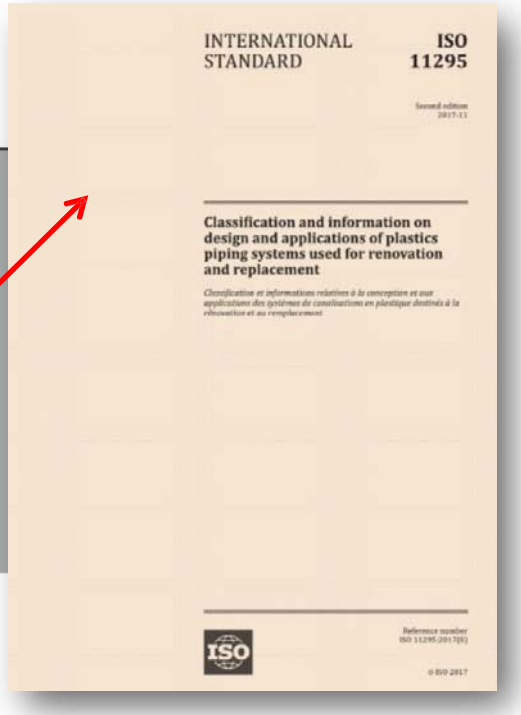


In drinking water pipeline rehabilitation, the "Hose Liner Technique" involves using a rigid, seamless, airtight and waterproof coating material made of synthetic fiber jacket and covered with various reinforcement layers, to create a lining for existing underground pipes. This process, which involves relining the inner surface of existing pipes, is carried out in accordance with ISO 11295 standards and technical safety regulations.

KANALTEK
NO DIG TECHNOLOGIES


HOSE LINER TECHNOLOGY

ADVANTAGES OF HOSE LINER TECHNOLOGY



Anti-corrosion
Non-metallic
service life
＞20years

Big diameters
DN50-DN1200






Deformation resistance:
Flexible/self-supporting lining that can prevent damage from deformation.



Quick Installation
1km/3h, temporary grounding hose



Compressive strength
W.P. 2.0MPa,
B.P. 6.0MPa strength line



Contamination-free
TPU/PE Polymer,
100% branded, fresh material



Long-distance application:
Allows application up to a maximum length of 5.0km in a single pull.

KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

HOSE LINER REHABILITATION TECHNICAL INFORMATION

Material Performance Data

No.	Factor	Unit	Value	Standart
1	W.P.(bare liner)	MPa	≤12.0	GB/T15560-1995 (depends on fiber material)
2	W.T.	℃	-40-80 -40-120 -40-160	GB/T 1633-2006 (depends on the resin material.)
3	Minimum axial tensile strength	t	2-200	GB/T1040-2006
4	Peel resistance	N/25CM	≥80	GB/T2791 - 1995
5	Anti-bending performance	times	≥4×10^4	GB/T3903-2008
6	Wear resistance	CM^3	0.5-1.2	GB/T1689-1998
7	Scratch resistant	times	≥260	corporate standard
8	Airtightness	cm^3 CH_4 lN×mm/(bar×m^2×h)	5	corporate standard
9	Air permeability	cm^3 CH_4 lN×mm/(bar×m^2×h)	0.5	corporate standard
10	One-time length	m	≤5000	it can be changed according to preference.







KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

HOSE LINER REHABILITATION TECHNICAL INFORMATION






Inner diameter (mm)	Design pressure (MPa)	Burst pressure (MPa)	Reinforcement / strengthening material
DN50	8.0	16/24	Polyester
DN80	8.0	16/24	Polyester
DN100	8.0	16/24	Polyester
DN127	7.0	14/21	Polyester
DN150	6.0	12/18	Polyester
DN200	5.0	10/15	Polyester
DN250	4.5	9.0/13.5	Polyester
DN300	4.2	8.4/12.6	Polyester/Kevlar
DN400	4.2	8.4/12.6	Polyester/Kevlar
DN500	4.0	6.0/12	Polyester/Kevlar
DN600	2.0	4.0/6.0	Polyester/Kevlar
DN800	2.0	4.0/6.0	Polyester/Kevlar
DN1200			

KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

IMPLEMENTATION PROCEDURES & KEY POINTS

- 3 Key Points-

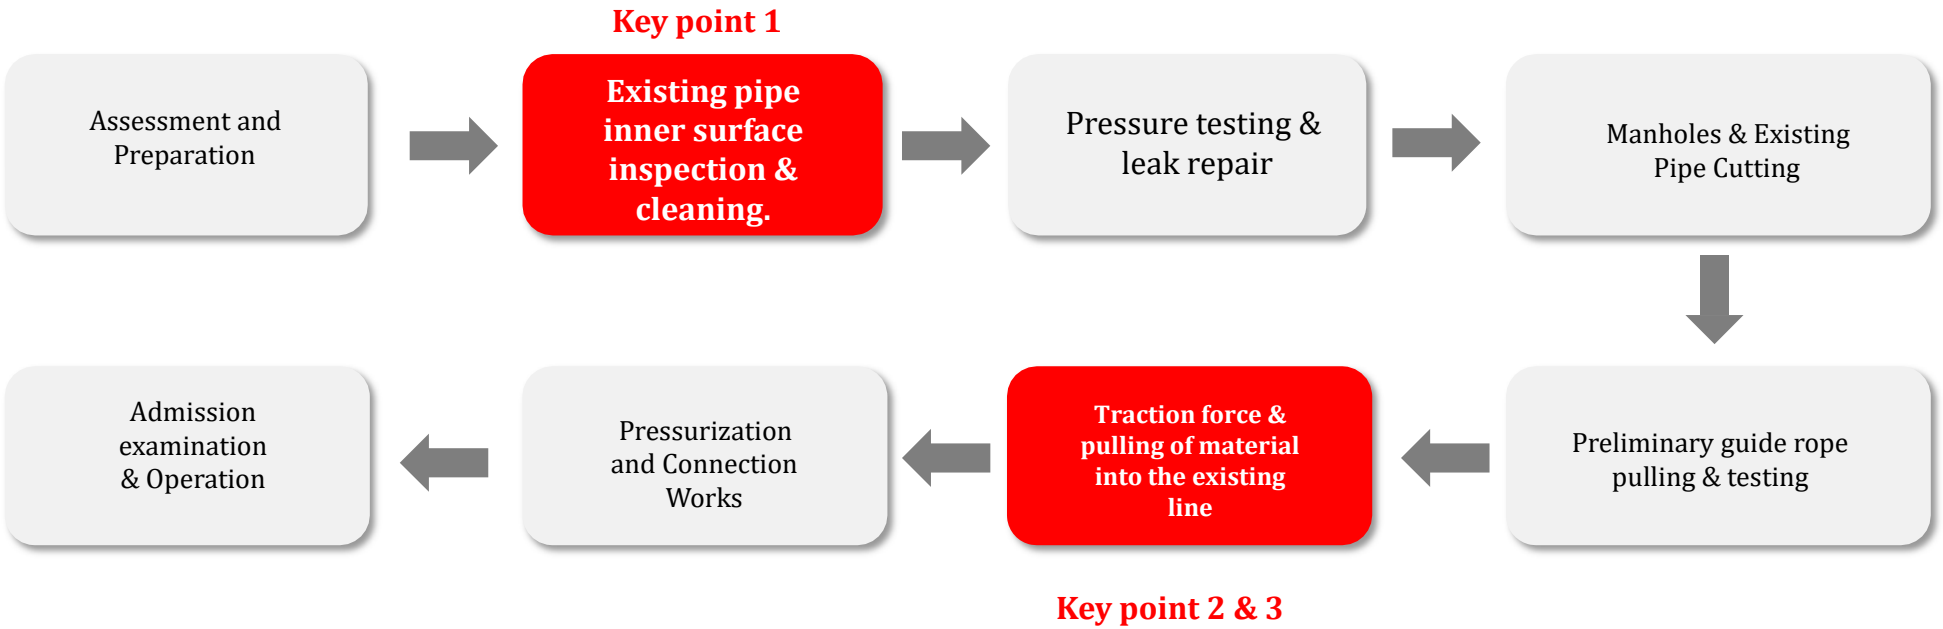

KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

IMPLEMENTATION PROCEDURES & KEY POINTS

Key Point 1: All sharp and cutting objects should be removed and cleaned with using a cleaning tool such as a wire brush.











KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

IMPLEMENTATION PROCEDURES & KEY POINTS

Key Point 2: **Ensuring the material, given a fixed U-shape, is securely pulled onto the existing line using fiber tape reinforcement and wrapping.**





KANALTEK
NO DIG TECHNOLOGIES

HOSE LINER TECHNOLOGY

IMPLEMENTATION PROCEDURES & KEY POINTS

Key Point 3: **Installing a rotating ring to prevent the line from bending.**



KANALTEK
NO DIG TECHNOLOGIES

THANKS...!