

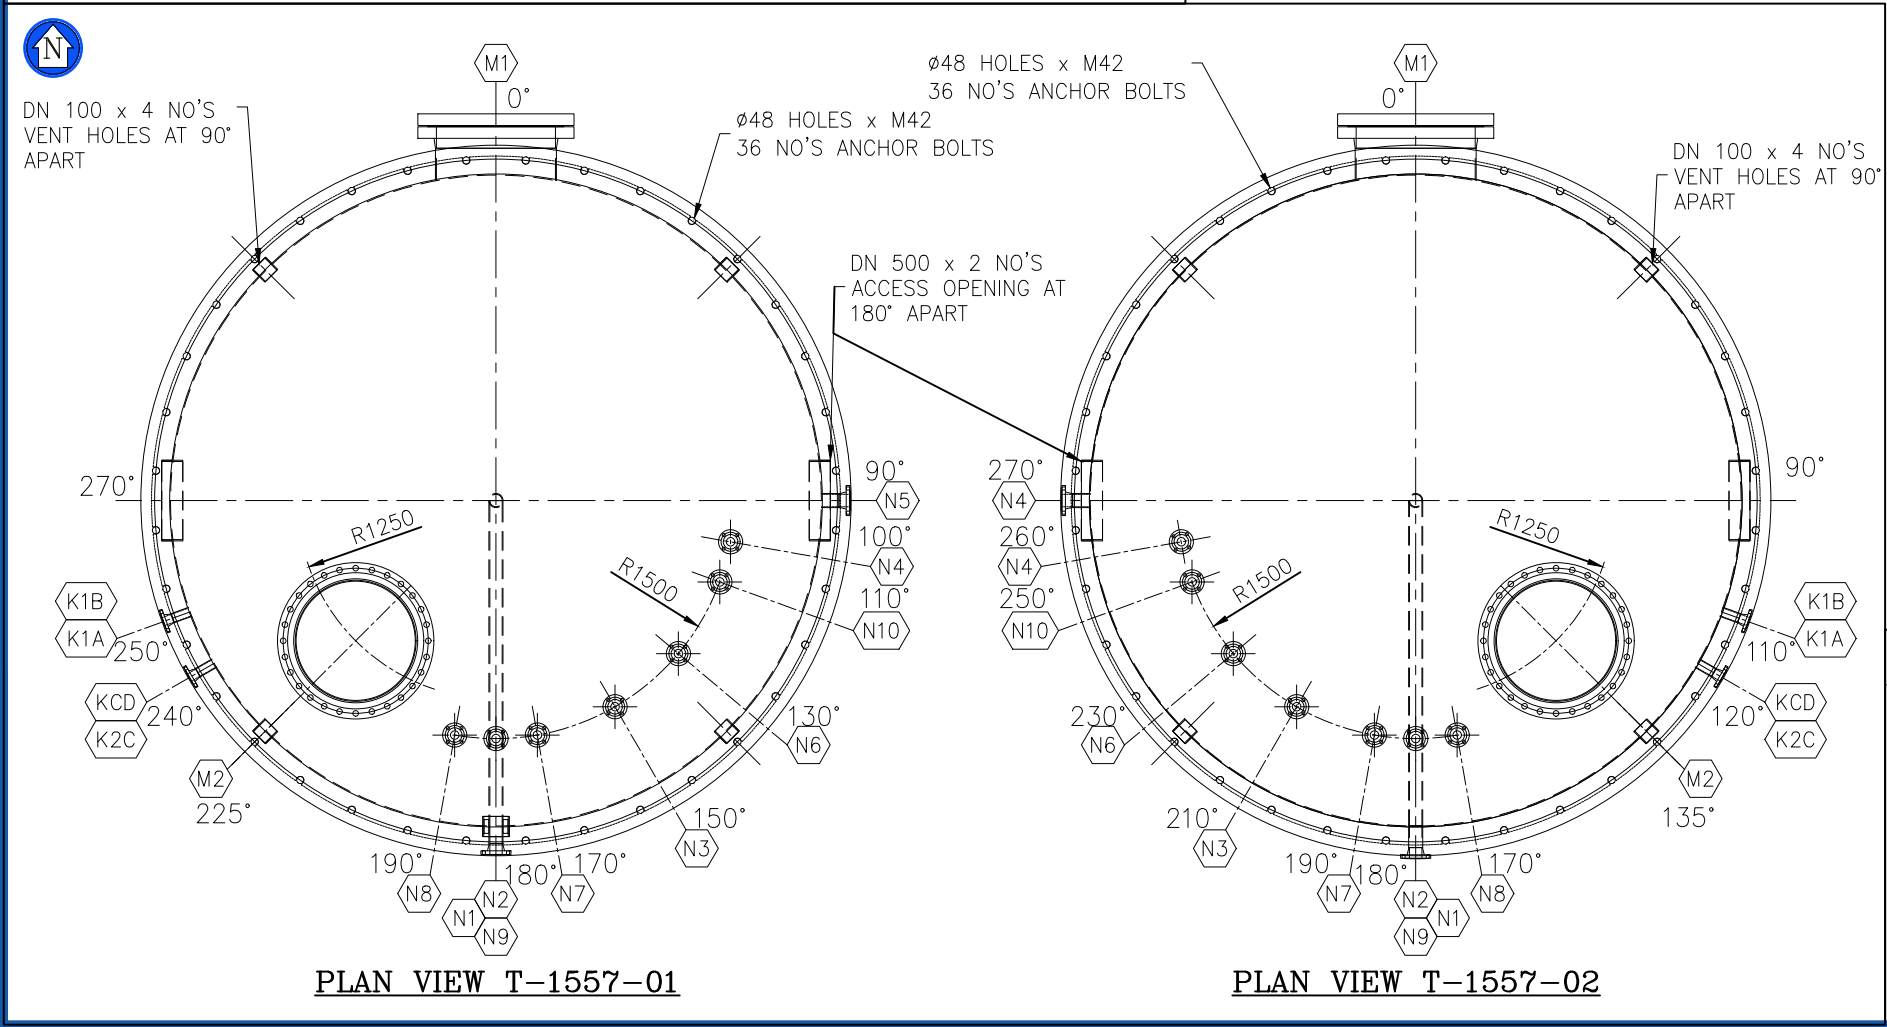
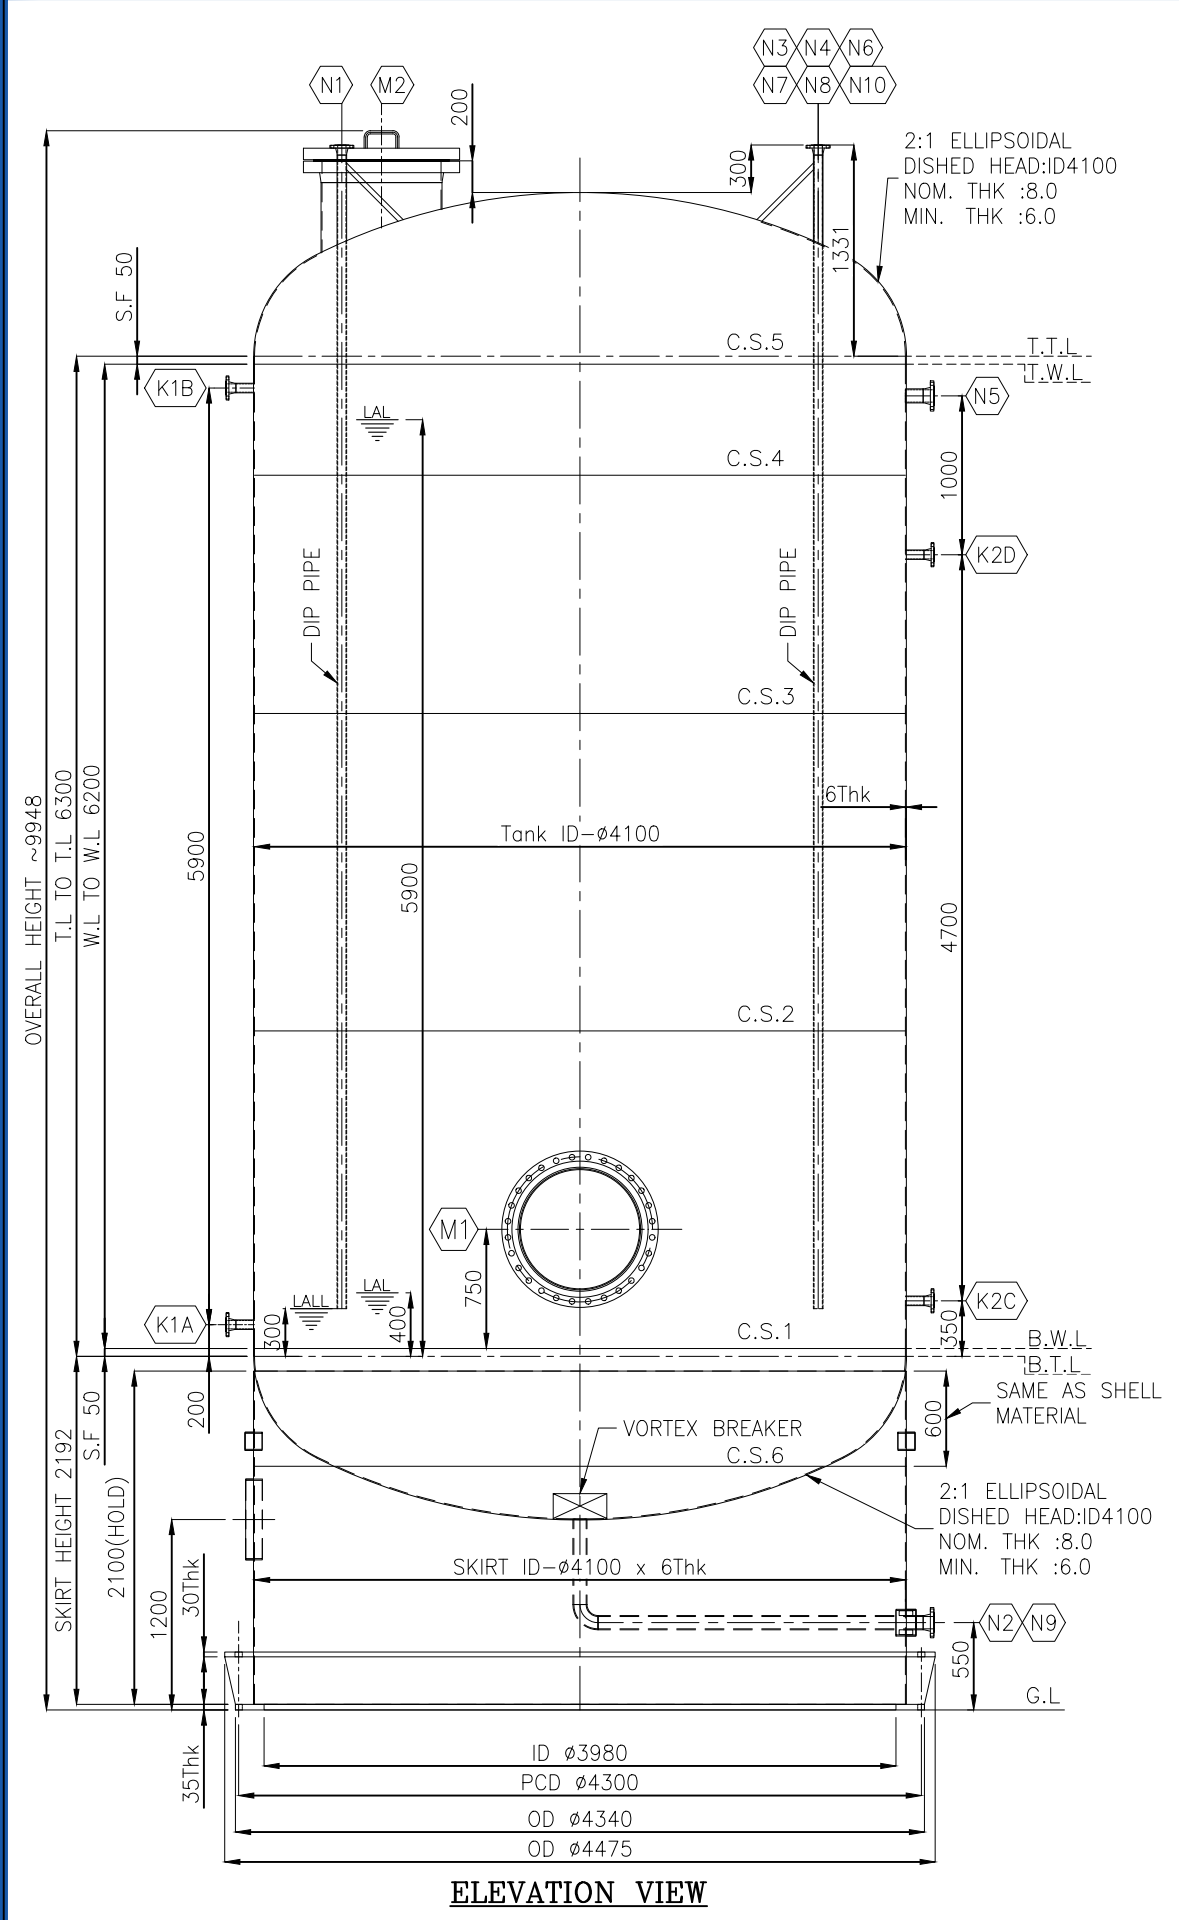




NOZZLE TABLE												
NOZZLE MARK	DESIGNATION	QTY	NB	ASME FLANGE RATING			PIPE SCH/THK	NOZZLE PROJECTION	NOZZLE ORIENTATION		REMARKS	
				CODE	CLASS	TYPE FACING			A	B		
N1	LIQUID INLET	1	50	B16.5	150#	WN	RF	40S/3.91	300	180°	180°	DIP PIPE
N2	LIQUID OUTLET	1	80	B16.5	150#	WN	RF	40S/5.49	300	180°	180°	---
N3	CALIBRATION POT RETURN	1	50	B16.5	150#	WN	RF	40S/3.91	300	150°	210°	---
N4	VENT	1	50	B16.5	150#	WN	RF	40S/3.91	300	100°	260°	---
N5	OVERFLOW	1	80	B16.5	150#	WN	RF	40S/54.9	175	90°	270°	---
N6	RECIRCULATION	1	50	B16.5	150#	WN	RF	40S/3.91	300	130°	230°	---
N7	PSV RETURN LINE	1	50	B16.5	150#	WN	RF	40S/3.91	300	170°	190°	---
N8	UTILITY	1	50	B16.5	150#	WN	RF	40S/3.91	300	190°	170°	DIP PIPE
N10	SPARE	1	50	B16.5	150#	WN	RF	40S/3.91	300	110°	250°	---
K1 A/B	LEVEL TRANSMITTER	2	50	B16.5	150#	WN	RF	40S/3.91	175	250°	110°	---
K2 C/D	LEVEL GAUGE	2	50	B16.5	150#	WN	RF	40S/3.91	175	240°	120°	---
M1	MANWAY	1	750	B16.47A	150#	WN	RF	6 THK	300	0°	0°	---
M2	MANWAY	1	750	B16.47A	150#	WN	RF	6 THK	300	225°	135°	---



ALLOWABLE NOZZLE LOAD TABLE									
NOZZLE MARK	CLASS	P		Vc		VI	MC	ML	MT
		Kgf		Kgf					
ALLOWABLE NOZZLE LOAD FOR SHELL									
N5-DN 80	150#	-76.3	95.5	95.5	-23.7	30.2	38.3		
ALLOWABLE NOZZLE LOAD FOR DISH									
N2-DN 80	150#	-76.3	95.5	95.5	-23.7	30.2	38.3		
N1,N3,N6,N8,N10-DN 50	150#	-51.8	64.9	64.9	-11.0	1.9	17.5		

FOUNDATION LOAD DATA			
UNITS		FACTORED	UN-FACTORED
SHEAR			
MAX. BASE SHEAR (WIND)	Kgf	5397.0	5397.0
MAX. BASE SHEAR (SEISMIC)	Kgf	9058.0	12686.0
MOMENT			
MAX. BASE MOMENT (WIND)	Kgf-m	25246.0	25246.0
MAX. BASE MOMENT (SEISMIC)	Kgf-m	47443.0	66446.0

145

200

MANUFACTURER

EURO MECHANICAL

MANUF.SERIAL No.

CODE

VESSEL No.

CONSTR.

SHELL

CAT.

DESIGN PRESS.

0.06

bar (g)

YEAR

DESIGN TEMP.

84

°C

VESSEL CATEGORY

TEST PRESS.NEW

0.078

bar (g)

VOLUME

92.5

m3

SURFACE AREA

m2

STRESS RELIEVED

II

VOLUMETRIC EXAMINATION

III

X

III

DATE

X

III

REG. No.

DETAIL OF NEME PLATE

MECHANICAL DESIGN DATA											
DESIGN & CONSTRUCTION CODE : UL 142/NFPA 20& 30/ASME SEC VIII DIV.1 EDITION: 2023											
ASME CODE STAMP MARK WITH 'U' DESIGNATION SYMBOL						TBC					
NATIONAL BOARD REGISTRATION / NUMBER						TBC					
CYCLIC/LETHAL/SOUR/HYDROGEN						HYDROGEN					
SPECICAL SERVICE						Hydrogen Peroxide (H2O2)					
APPLICATION						STORAGE					
MANUFACTURER SERIAL NUMBER						TBC					
TAG NO						T-1557-01/02					
QUANTITY						2 NO'S					
SIZE PARAMETER											
CONFIGURATION (TYPE)						VERTICAL					
INSIDE DIAMETER OF TANK						mm		4100			
HEIGHT OF TANK T.L TO T.L						mm		6300			
DESIGN PARAMETER											
OPERATING FLUID (GASES IN VAPOR SPACE)						AIR					
SPECIFIC GRAVITY						Kg/m ³		1100			
CAPACITY, (NOMINAL/WORKING)						m ³		92.5/72.6			
INTERNAL DESIGN PRESSURE						bar(g)		0.06			
EXTERNAL DESIGN PRESSURE						bar(g)		N.A			
MAX. ALLOWABLE WORKING PRESSURE (INTERNAL)/(EXTERNAL)						bar(g) @ °C		0.06 / N.A @ 84			
DESIGN TEMPERATURE (MIN/MAX).						°C		0/84			
MINIMUM DESIGN METAL TEMPERATURE (MDMT) @ MAMP						°C @ bar(g)		0 @ 0.06			
MINIMUM DESIGN METAL TEMPERATURE						°C		0			
JOINT EFFICIENCY						1.0 FULL					
RADIOGRAPHY						100 %					
CORROSION ALLOWANCE						SHELL DISH 0 mm 0 mm					
OPERTATING PRESSURE						bar(g)		ATM			
OPERATING TEMPERATURE						°C		AMBIENT			
HYDROSTATIC TEST PRESSURE											
SHOP : UG 99 (c) (35)						bar(g)		0.078			
FIELD : UG 99 (b) (35)						bar(g)		0.078			
POSITON / DURATION						VERTICAL / 60 MINITES					
HYDROTEST TEMPERATURE (MIN / MAX)						°C		TBC			
POST WELD HEAT TREATMENT (PWHT)						NA					
CHARPY IMPACT TEST						NA					
WIND SPECIFICATION						BS-6399 97					
SEISMIC SPECIFICATION						UBC 1997					
Maximum Filling Rate						20 m ³ /hr					
Maximum Emptying Rate						0.674 m ³ /hr					
INSPECTED BY						TBC					
INSULATION DETAIL						NA					
PAINTING						TBC					
WEIGHT DETAILS											
EMPTY WEIGHT						kg.		11003.8			
OPERATING WEIGHT						kg.		101490.2			
SHOP TEST						kg.		112179.6			
FIELD TEST						kg.		112179.6			
MATERIAL OF CONSTRUCTION											
SHELL/DISH ENDS						SA 240 GR. 316/316L					
PIPE						SA 312 TP 316/316L					
ELBOWS						SA 403 WP GR.316/316L					
FLANGES						SA 182 F 316/316L					
STIFFENER PLATES						SA 240 GR. 316/316L					
NECK PLATE						SA 240 GR. 316/316L					
FLANGES						SA 182 F 316/316L					
COVER FLANGE						SA 182 F 316/316L					
GASKETS						SPIRAL WOUND 316L					
INTERALS						SA 240 GR. 316/316L					
INTERNAL / EXTERNAL REINFORCEMENT PADS						SA 240 GR. 316/316L					
BOLTS & NUTS						INTERNAL		SA 193 Gr.B7/SA 194 2H			
						EXTERNAL		SA 193 Gr.B7/SA 194 2H			
NAME PLATE						SS 304					
NAME PLATE BRACKET						SA 240 GR. 316/316L					
SKIRT SUPPORT AND BASE PLATES						316/316L, S275 JR/A36					
ROOF HANDRAILS/MIDRAIL /TOE PLATE						IS 1239 / IS 1239 / IS 2062					
EARTING LUG						--					
ANCHOR BOLT						BY OTHRES					

W3

CL OF PIPE

CL OF PIPE

DETAIL OF NOZZLE
WELD JOINT AS PER FIG. UW-16(c)

W4

WNRF FLANGE

CL OF PIPE

NOZZLE TO WNRF FLANGE
WELD DETAIL