

# Simba M6

Hydraulic production drill rig with I-beam mounted drilling unit for long-hole mining and medium-to-large holes ranging from 51 to 178 mm in diameter



# High precision solution

The sturdy Simba M6 is a long-hole production drill rig for medium to large-drift mining. It accommodates a range of drill bits, rock drills and in-the-hole hammers to adapt to your specific needs. The rig operator enjoys excellent visibility and enhanced safety in the comfortable cabin. When you seek a hard-working, high-precision solution for long-hole drilling, rely on the powerful Simba M6.

## ⊕ Main benefits

**Easy setup and steady, accurate drilling** thanks to the I-frame with pendulum arm which has the drilling unit mounted on it

**Optimized performance, hole quality and drill steel economy** with a wide range of top hammers and in-the-hole hammers to best suit your operation

**Precise and productive** thanks to our acclaimed Rig Control System (RCS), tele-remote control option and smart automated single/multi-hole drilling functions



Excellent operator visibility during drilling through the I-beam mounted drilling unit facing the cabin



The bit changer increases efficiency and keeps the operator at a safe distance from the drilling zone

The cabin is ROPS and FOPS certified for a safe, ergonomic operating environment

The reverse camera enhances visibility and safety while transporting the drill rig



# Fast and precise rock drilling

Simba M6 models are built for fast on-site positioning and accurate hole placement. Intelligent functions on these high-performance rigs boost efficiency and productivity while making the operator's job safer and easier.



## + Safety

The Simba M6 is designed with safety in mind. The rig operator sits in a ROPS and FOPS certified cabin which offers excellent visibility and comfort. Barrier sensors protect the operator and other workers from rotating parts during automatic drilling.



## + Automation

Boost your productivity by equipping your Simba M6 with smart automated functions such as ABC Regular or ABC Total. Your Simba M6 can then effectively continue to drill unattended throughout personnel breaks and shift changes. With the tele-remote control function, the rig operator can safely and comfortably command the rig from a distance.



## + Epiroc Rig Control System

We introduced the first version of our computerized drill rig control system in 1998 to take the market by storm. Throughout the years, the Rig Control System (RCS) has been further advanced and refined to include increasingly sophisticated functions informed by practical work experience and an on-going dialogue with customers. More than 3 000 RCS-equipped rigs are currently in operation the world over. At Epiroc, we continue to drive innovative development in the mining and tunneling industry.



## A comprehensive service offering

Even the best equipment needs to be serviced regularly to make sure it sustains peak performance. An Epiroc service solution offers peace of mind, maximizing availability and performance throughout the lifetime of your equipment. We focus on safety, productivity and reliability.

By combining genuine parts and an Epiroc service from our certified technicians, we safeguard your productivity – wherever you are.

Drilling system	A	B
COP 1838*	○	
COP 1838MUX*, COP 1838HUX*	○	
COP 2550UX*	○	
COP 3060MUX	○	
COP 4050MUX	○	
COP 44 to COP 64		○
COP 35		
Dry drilling system	○	
Collar Pipe Insertor (CPI)	○	
Thread lubrication kit	○	○
Bit changer	○	
Water mist flushing, external water and air supply (hydraulic oil cooled by water cooler)	○	●
Water mist flushing, external water and air supply (hydraulic oil cooled by air fan)	○	
Hole blowing kit	○	
Rock drill lubrication warning kit	●	

Boom/drilling unit	A	B
Automatic lubrication for drilling and positioning unit	○	○
Central lubrication for drilling and positioning unit	●	●
Rod Handling System, RHS 17 (17*1 rods) mechanized drilling up to 32 m	○	
Rod Handling System, RHS 27 (27*1 rods) mechanized drilling up to 51 m	○	○
Rod Handling System, RHS 35 (35*1 rods) mechanized drilling up to 63 m		○
Adaptable to 4', 5' and 6' rods	●	
Adaptable to 5' and 6' rods		●
2 rear and 2 front stinger	●	●

Feed	A	B
BMH 200-series 3 143 mm, 3 448 mm, 3 753 mm	○	
BMH 200-series (extractor) 3 348 mm, 3 653 mm, 3958 mm*	○	
BMH 200-series 3 316 mm, 3 621 mm, 3 926 mm**		○
* +55 mm for COP 2550 UX, +240 mm for COP 4050 MUX. ** +138 mm for hammer guide.		

Airsystem	A	B
Air flow guard	●	●
Compressor: Epiroc GAR 5	●	
Compressor: Epiroc GAR 30	○	
Compressor: double GAR 30 +air receiver	○	
Compressor: on-board booster, 25 bar/380 l/s		○
External air supply connection for hole blowing	●	
HECL lubrication system with electric filling pump		●

Watersystem	A	B
Minimum water inlet pressure 2 bar	●	●
Hydraulic water booster pump. Capacity at 15 bar 250 l/min	●	
Water injection pump. Capacity 50 l/min	○	●
Water hose reel including hose*	○	○
*Not applicable when booster compressor is installed on ITH drill rigs.		

Hydraulic system	A	B
Low oil level indicator and shut-down	●	●
Smart oil leakage shut-down system	●	●
Oil temperature gauge on oil tank, electronically supervised	●	●
Hydraulic oil thermostat	●	●
Water/oil cooler in stainless steel	●	●
Filtration 16 µm	●	●
Oil filter indicator	●	●
Mineral hydraulic oil	●	●
Electrical oil filling pump	●	●
Heater kit for hydraulic oil tank, diesel engine and electric motors	○	○
Biodegradable hydraulic oil	○	○
Nr-Cr plated piston rods (limited selection on request)	○	○

Control system	A	B
Epiroc Rig Control System (RCS)	●	●
Advanced Boom Control (ABC) Regular	○	○
Advanced Boom Control (ABC) Total	○	○
Breakthrough automatic stop	○	○
Underground manager pro	○	○
Drill plan handling	○	○
Drill plan handling with raise view	○	○
Full drilling data handling	○	○
Measure While Drilling (MWD)	○	○
Void detection	○	
Remote cradle control/remote feed control	○	○
Rig Remote Access (RRA)	○	○
Mobile tele remote/multi tele remote	○	○
Remote operating kit	○	○
Additional panel	○	○
Remote controlled camera on tripod with monitor in cabin	○	○
Total station navigation	○	○
Certiq professional	○	○
Kidney filter	○	○

Electrical system	A	B
Total installed power 118 kW (main motors 2x55 kW)	●	
Total installed power 63 kW (main motor 1x55 kW)		●
Total installed power 158 kW (main motor 1x95 kW, equipped with booster compressor)		○
Total installed power 158 kW (main motors 2x75 kW)*	○	
Voltage 400-1 000 V 50/60 Hz	●	●
Starting method star/delta (400-690 V)	●	●
Soft start of main electrical motors (not for 1000 V)	○	○
Electronic overload protection for electric motors	●	●
Digital voltmeter/ampere meter in electric cabinet	●	●
Electric outlet for accessories, 16 A (CE)/32 A (CE)	○	○
Extra transformer 15 kVA	○	○
PC4 or PC5 plug/socket	○	○
Phase sequence and earth fault indicator	●	●
Battery charger	●	●
Dual controls for cable reel	●	●
Limit switch for cable reel with signal lamp and brake connection	●	●
Stainless steel electrical enclosure	○	○

\*Only when equipped with COP 3060MUX and COP 4050MUX.

Carrier	A	B
Deutz TCD 2013 L04 2 V stage III A Tier 3 (120 kW)	○	○
Deutz TCD 4.1 L04 stage IV/Tier 4 F (115 kW)	○	○
Deutz TCD 2012 L06 2 V stage III A Tier 3 (155 kW)	○	○
Deutz TCD 6.1 L06 stage IV/Tier 4 F**	○	○
Front axel DANA spicer 123/90	○	○
Rear axel DANA spicer 123/90 ±8° oscillation	○	○
Articulated steering ±41° steering angle	●	●
Four-wheel drive	●	●
Electric system 24 V	●	●
Batteries 2x125 Ah	●	●
Hose/cable guiding at water/cable reel	○	○
Automatic differential lock on front axle, limited slip	●	●
Tires 12xR24	●	●
Tramming lights 8x22 LED, 24 V DC	●	●
Working lights 4x150 LED, 24 V DC	●	●
Rig alignment laser	●	●
Illuminated stairs for platform LED	●	●
Front and rear jacks	●	●
Fuel tank, volume 110 l	●	●
Central grease point	●	●
Fire suppression system ANSUL (manual or automatic)	○	○
Fire suppression system FORREX (manual or automatic)	○	○
Hot climate tramming kit	○	○
Rig washing kit*	○	○
Manual lubrication kit	○	○
Boot washing kit*	○	○

\*Not applicable when equipped with dry drilling system.

\*\*Maximum ambient temperature 25°.

Cabin (optional)	A	B
ROPS and FOPS certified cabin	●	●
Mounting height -140 mm	○	○
Cabin lift/tilt system, 375 mm/15°	○	○
Swingable seat for drilling and tramming	○	○
Front window 22 mm (P8B safety classified)	○	○
Reversing camera with monitor	○	○
12 V outlet	●	●
Joystick-controlled spotlights left and/or right, 70 W	○	○
FOPS-approved grizzly bar for front window	○	○
Low-designed cabin, for seated operator cabin height 2 735 mm	○	○
Media player	○	○
Air condition	●	●
Heating function for air conditioning (water transferred)	○	○
Electrical heater, 1.2 kW, 230 V (CE)	○	○
Cabin body made of stainless steel	○	○

Protective roof	A	B
FOPS approved	●	●
Swingable seat for drilling and tramming	○	○
Stainless steel	○	○
Joystick-controlled spotlights left and/or right, 70 W	○	○

## Drifter rods/pipes

Rock drill	Rod/Pipe	Guide tubes	Hole diameter (mm)
COP 1838+	R32 Speedrod	TDS 45	51-64
COP 1838+MUX	T38 Speedrod	TDS 54/TDS 64	64-76
COP 1838+HUX	T45 Speedrod	TDS 64/TDS 76	76-89
	TDS 45	N/A	48-76
	TDS 54	N/A	64-89
	TDS 64	N/A	70-89
COP 2550UX	T51	TDS 76	89-115
	TDS 64	N/A	76-115
	TDS 76	N/A	89-102
	TDS 76	N/A	89-115 (ST58 shank adapter)
COP 3060	TDS 76	N/A	89-102
	TDS 87	N/A	102-115
COP 35	TAC 76/89	N/A	88-105
COP 44	TAC 76/89	N/A	110-125
COP 54	TAC 89 (TDS102)	N/A	134-152
COP 64	TAC 89 (TDS102)	N/A	156-178
COP 4050	TDS 76	N/A	89
	TDS 87	N/A	102-147

## Recommended cable size and length

Voltage	Type	Dimension (mm²)	Diameter (mm)	Length (m)	Length ITH (m)
380-400 V	Buflex	3x185+3G35	56	80	65
440-500 V	Buflex	3x150+3G25	52	120	70
550 V	Buflex	3x120+3G25	46	120	95
660-690 V	Buflex	3x95+3G16	45	150	125
1 000 V	Buflex	3x50+3G10	33	200	200

Recommendations are given for surrounding temperature of 40 °C and up to a height of 2 000 m.

## Noise and vibration

Operator sound pressure level in canopy, drilling, free field (ISO 11201)	104±6 dB(A) re 20 uPa
Operator sound pressure level in cabin, drilling, free field (ISO 11201)	75±3 dB(A) re 20 uPa 75±3 dB(A) re 20 uPa (DH)
Operator sound pressure level working close to machine, drilling, free field	104±6 dB(A) re 20 uPa
Peak C-weighted instantaneous sound pressure level (EN16228)	Less than 130 dB
Sound power level (ISO 3747), drilling, free field	128 dB(A) re 1 pW
Vibration levels seated, drilling (ISO 2631-1)	0.07±0.07 m/s²
Vibration levels standing, drilling (ISO 2631-1)	0.07±0.07 m/s²

## Recommended drift size

Feed	Rod	Minimum (HxW)
BMH 214/234	1 220	4 600x3 600 mm
BMH 215/235	1 525	4 900x3 900 mm
BMH 216/236	1 830	5 200x4 200 mm

## Dimensions

Measurement	Simba M6	Simba M6 ITH
Width	2 210 mm	2 210 mm
Height with cabin	3 100 mm	3 100 mm
Height roof up/down	3 050/2 945 mm	3 144/2 518 mm
Length tramming	10 420 mm	10 720 mm
Ground clearance	265 mm	265 mm
Turning radius outer/inner	6 900/3 800 mm	7 625/4 750 mm

## Tramming speed

On flat ground	>15 km/h
On incline 1:8	>5 km/h


## Gross weight (depending on configuration)

Rig type	Total	Boom side	Engine side
Simba M6	26 000 kg	14 500 kg	6 400 kg




# Technical specifications

Dimensions in millimeters

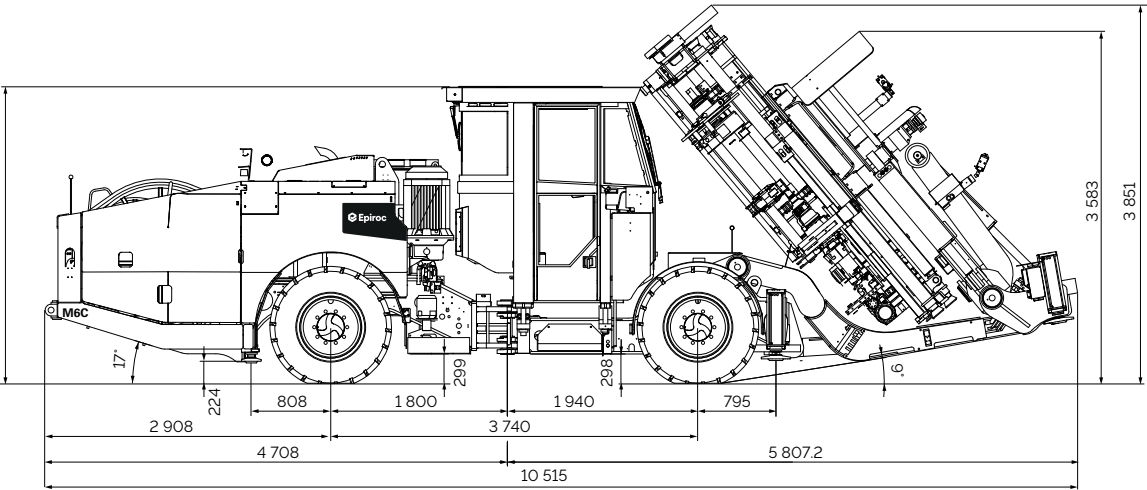


Simba M6/Simba M6-ITH.


3 023 (std cab with cab attachment height = 200)	(2 733 for low cab)
(2 883 for std cab with cab attachment height = 60)	(2 961 for highest protection roof)
(3 273 for std cab with cab attachment height = 450)	(2 261 for lowest protection roof)
(3 423 for std cab with cab attachment height = 600)	

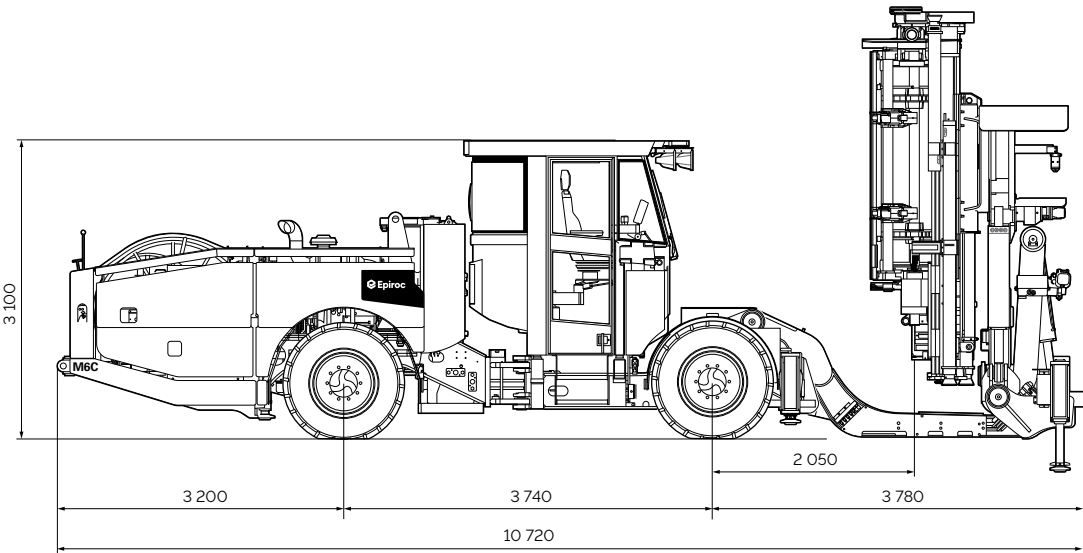

Simba M6-ITH, equipped with booster compressor.

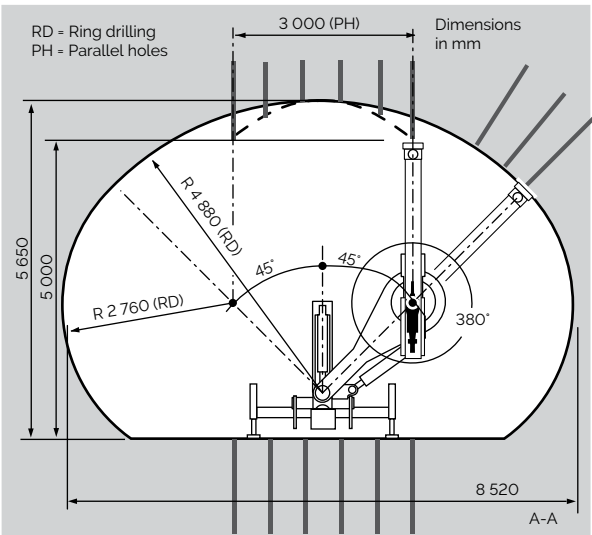

Coverage area.

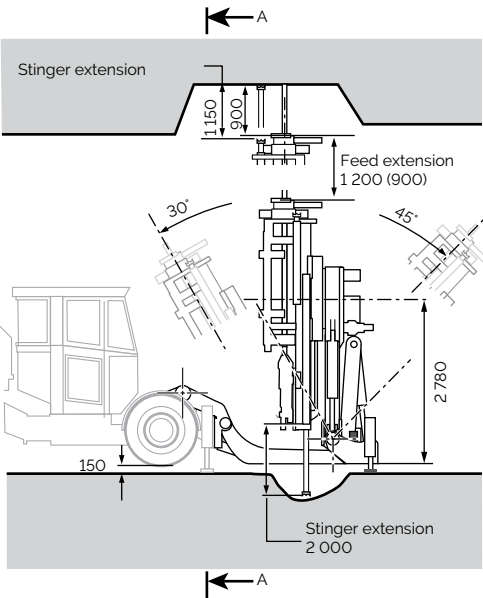

# United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.  
**[epiroc.com](http://epiroc.com)**

