Studying Quadrupedal Gaits in Simulation
An Optimization-Inspired Approach

Alexander Volkov
Robotics Institute
Carnegie Mellon University
5000 Forbes Ave., Pittsburgh, PA 15213
avolkovjr@cmu.edu

Abstract—Of special interest in the study of legged locomotion is the variety of steady-state gaits exhibited by biological quadrupeds, as well as their preference for certain gaits based on locomotive efficiency and desired speed. This work shows that a similar collection of gaits and selection policy naturally emerges for a robotic quadruped. To this end, a high-fidelity dynamic model of the quadrupedal Ghost Robotics *Minitaur* robot was developed and its emergent gait properties studied in simulation.

I. Introduction

The variety of steady-state gaits exhibited by biological quadrupeds has long been of great interest in biomechanics. Previous work (Hegland et al. 1988; Hoyt et al. 1981) has associated such gait preference in a variety of wild and domestic animals with minimization of power expenditure, depending on desired speed. The ubiquity of this phenomenon in the biological domain motivates an effort to investigate whether a similar gait variety and selection policy naturally emerges on a robotic quadruped, despite the significantly different energy storage, transmission, and actuation mechanisms involved.

In this work, a high-fidelity dynamic model of a quadrupedal robot platform is used to generate and study the emergence of various steady-state gaits commonly observed in biological quadrupedal systems. A naïve control architecture consisting of an elliptical foot trajectory generator, softly-tuned joint position PID controllers, and a low-dimensional gait timing parametrization (inspired by (Hildebrand 1965)) are used to emphasize the inherent, open-loop robustness of the system for valid gaits.

Previous efforts on this project yielded promising initial results, but were largely impeded by the difficulty in achieving sufficient sampling granularity over the gait parameter space due to the brute-force evaluation approach taken and the nontrivial time required to compute each simulation trial.

A more effective sampling method was desired, with the property that it would be biased toward greater sampling granularity near the sparsely distributed regions of interest corresponding to the quadruped's stable gaits. Recognizing that the evaluation of each sample provides an inherent performance metric (the gait efficiency, see section I-A) with local maxima corresponding to the regions of interest, the desired sampling method was reinterpreted as a form of optimization. However, rather than exclusively consider the terminal result of the optimization process, all intermediate steps of the search would be retained to construct a sampled approximation of the gait efficiency over the parameter space. Additional minor considerations would also be required to ensure that such an optimization algorithm is biased against early termination, in favor of searching more aggressively for alternative regions of interest in the parameter space.

The Covariance Matrix Adaptation Evolution Strategy (CMA-ES) optimization algorithm (Hansen and Ostermeier 2001) was selected based on the foregoing considerations. A brief overview of the algorithm is provided in section I-B. A custom *MATLAB* implementation of the CMA-ES algorithm was developed in order to make use of the computing environment's parallelization capabilities as well as interface directly with an existing *Simulink/Simscape Multibody* physics simulation environment from previous work on this project. The resulting pipeline samples the gait parameter space far more efficiently than the previously used brute-force approach.

A. Performance Evaluation

For the purposes of this study, gait performance was evaluated exclusively in terms of efficiency. Robustness to environmental disturbances was not of concern; a flat, high-friction ground model is used throughout the study. As is standard in locomotion literature (Von Karman et al. 1950), steady-state gait performance was

quantified using the cost of transport (CoT) metric, as per eq. (1):

$$\text{CoT} = \frac{P_{in_{avg}}}{m_{sys}gv_{avg}} = \frac{E_{in_{tot}}}{m_{sys}gd_{tot}} \tag{1}$$

where $P_{in_{avg}}$ and $E_{in_{tot}}$ are the average power and total energy, respectively, provided to the system over a fixed time period in steady-state locomotion; v_{avg} and d_{tot} are the average velocity of and total distance travelled by, respectively, the system over the same interval; m_{sys} is the total system mass; and g is the acceleration due to gravity.

It should be noted that gait stability and efficiency are highly coupled. Infeasible or otherwise unstable gaits result in very high CoT evaluations, whereas stable gaits are comparably far more energetically effective.

B. CMA-ES Algorithm

The CMA-ES algorithm was originally reported in (Hansen and Ostermeier 2001), building on existing work done in the broader class of algorithms known as *evolutionary strategies* which take inspiration from biological evolution. Generally, such are well suited to nonlinear optimization problems where objective function gradients are not easily computable. CMA-ES, in particular, has gained significant popularity in recent years due to its computational efficiency, making it a popular choice for derivative-free, nonlinear optimization over high-dimensional parameter spaces.

Conceptually, CMA-ES operates by iteratively modifying a multivariate normal distribution over the parameter space. At each iteration – a *generation* – of the algorithm, the distribution is used to sample the parameter space for the following generation, which in turn distorts and moves the distribution in the general direction of greater fitness. The shape of the distribution reflects the focus of the algorithm over the parameter space – as the algorithm converges upon a local maxima, the distribution will generally tighten. However, in order to avoid premature convergence, a variety of modifications to the algorithm may also be introduced to cause it to broaden its search for alternative regions of high fitness in the parameter space.

The basic CMA-ES algorithm is outlined in algorithm 1. The process is initialized by a choice of generational population size λ, as well as initial mean m_0 and standard deviation σ_0 for the first generation population sampling. Additionally, the normalized covariance matrix C and the two evolutionary path

---

Algorithm 1 CMA-ES algorithm

1: **function** CMA-ES($\lambda \in \mathbb{R}, m_0 \in \mathbb{R}^n, \sigma_0 \in \mathbb{R}^{n \times n}$)

2:     $m \leftarrow m_0$ ▷ Mean
3:     $\sigma \leftarrow \sigma_0$ ▷ Std. Dev.
4:     $C \leftarrow I_n$ ▷ Normalized Covariance
5:     $p_\sigma, p_c \leftarrow 0$ ▷ Evolution Paths
6:     $gen \leftarrow 1$ ▷ Generation Counter
7:     $f \leftarrow 0$ ▷ Fitness Vector

8:     **while** TERMINATE(gen,f) = false **do**

9:         **for** $i \leftarrow 1, \lambda$ **do**
10:            $x_i \sim \mathcal{N}(m, \sigma^2 C)$
11:            $r_i \leftarrow$ SIMULATE(x_i)
12:            $f_i \leftarrow$ FITNESS(r_i)
13:        **end for**

14:        $x \leftarrow$ SORT(x, f)
15:        $\bar{m} \leftarrow m$
16:        $m \leftarrow$ MEAN(x)
17:        $p_\sigma \leftarrow$ UPDATEPS($p_\sigma,\sigma,C,m,\bar{m}$)
18:        $p_c \leftarrow$ UPDATEPC
19:        $C \leftarrow$ UPDATEC
20:        $\sigma \leftarrow$ UPDATESIGMA
21:        $gen \leftarrow gen + 1$

22:    **end while**
23: **end function**

---

vectors p_σ and p_c are instantiated to the identity and null, respectively, as their default values.

During each generation, a population of sampled parameter vectors x is generated from a normal distribution based on the current values of the mean m, standard deviation σ, and normalized covariance matrix C. Each parameter vector of the population is then evaluated by the objective function and assigned a fitness value. The population is then sorted by fitness and the parameters of the sampling normal distribution for the next generation are updated.

The termination conditions for the optimization are checked before each successive generation. For our purposes, the termination conditions were set based on generation count and wall clock time, in order to allow the algorithm to explore the parameter space beyond any given local minima. In most cases, however, the termination will depend primarily on the present and possibly previous generation's fitness values, in order

to detect if some form of convergence has occurred.

The CMA-ES code developed for this project was adapted from Nikolaus Hansen's sample *MATLAB* CMA-ES implementation (Hansen 2011).

C. Minitaur Robot

The simulated gait investigation reported here was done using a detailed dynamic model of a *Ghost Robotics Minitaur* (Ghost Robotics LLC 2016): an 8 DOF, direct-drive (PMSM actuated) quadrupedal robot platform capable of both quasi-static and dynamic gaits. A photo of the *Minitaur* is provided in fig. 1. Notably, the legs of this quadruped consist of nearly symmetric five-bar linkages. The robot is approximately 50cm long, 30 cm wide, and has a maximal leg extension of 30 cm. The total weight of the system is 6.36kg.

Figure 1: Ghost Robotics Minitaur (Ghost Robotics LLC 2016)

II. Simulation Model

Although spring-mass models such as SLIP and LIPM are popular for gait synthesis and control in contemporary legged robotics literature (Wu et al. 2013), their low-dimensional nature does not capture the complex dynamics that result with respect to both the variety of possible quadrupedal gaits as well as their relationship to the system's locomotive efficiency. Higher-dimensional lumped element models have also been studied as a means of simplifying and abstracting the mechanics of quadrupedal systems while nonetheless capturing their principle dynamic behaviors (Full et al. 1999; Remy 2011). The construction of such reductive models inherently depends on a-priori knowledge of the systems' principle dynamics.

For this investigation, however, a high-fidelity model is needed in order to accurately capture the full system dynamics and power expenditure of the system. In effect, this maximally avoids introducing any simplifications that may inadvertently alter the emergent gait patterns and selection policies.

To this end, a detailed model of the *Minitaur* was previously created in *Simulink/Simscape Multibody* and improved for the work reported here. Descriptions of the various components of the model follows.

A. Trajectory Generator and Gait Parametrization

For this project, we generate elliptical trajectories for each foot. An ellipse was chosen as it is simple enough to be easily parameterized, yet produces complex gait behavior. The major and minor diameters of the ellipse, its distance from the motor axes, and its tilt were determined manually by examining the reachable workspace of the foot as well as simulation to ensure stable behavior. The *period* of the elliptical trajectory, which describes how long it takes for each foot to complete one pass through the ellipse, is given as a parameter to the system. To produce different gaits, a phase offset is given for each foot; that is, all feet follow the same trajectory with the same period, but at different phase offsets. We represent the phase offsets using two parameters. The first is the *left/right sync*, which is true if the left and right sides are symmetrical and false if they are antisymmetrical, (i.e., 180° out of phase). The second parameter is the *phase offset* of the fore legs, which determines how much each fore foot lags behind the corresponding back foot. From these parameters, we can generate a wide variety of gaits.

B. Motor Controllers

An analytical inverse kinematics model is used to compute desired motor angle from each foot trajectory. These desired joint angles are then fed into a softly-tuned position PID controller to compute desired motor torques, which are then sent to the motors. The "softness" of the position controller was used to emulation elasticity in the leg actuation. The gains were manually tuned to achieve acceptable performance.

C. Robot Model

The *Simulink/Simscape Multibody* model of the *Minitaur*'s behavior includes several detailed features that make it more complicated than some of the simplified mechanical models we have discussed in class and make it more challenging to work with analytically. The mechanical model itself was generated from a CAD model supplied by Ghost Robotics and cleaned up manually by us. It includes details such as mechanical

mates, material properties, and linkages. The motors are represented using a simplified brushless DC motor model, with a time constant delay in torque acquisition and saturation limits given by the motor specs. Joint friction is also modeled. For the ground contacts, a sphere-on-plane proportional-derivative model was used, sourced from a third-party Simscape contact model package (Miller 2016). This model contains both static and dynamic friction, and is sophisticated enough to demonstrate several gaits. Due to the complexity of the model itself, it is surprising that a simplified controller can produce complex gait behavior.

III. Results

To correlate the CoT with the parameters of the model, simulations were performed various values for the period of the gait and the phase offset between the fore leg and the hind leg, using CMA-ES with a large parameter space. Based on the results achieved, the parameter space for the period was narrowed down, and CMA-ES was conducted again.

A. Parameter Sweep

First, the entire parameter space was intelligently searched for *period* $t \in [0.5, 4]$ and the *phase offset* $l \in [0, 2\pi]$, with 0 indicating in-phase and π indicating out-of-phase motion of the fore and the hind legs using CMA-ES. This entire parameter space was searched for the two cases of left/right symmetry and anti-symmetry. The elliptical path trajectory for the simulation was a semi-major axis of radius $0.3\ell_{leg}$ oriented along the distance travelled and a semi-minor axis of radius $0.2\ell_{leg}$ length oriented vertically.

B. Preliminary Results

The CoT heat map for left/right symmetric gaits can be seen in fig. 2. The majority of the parameters swept resulted in high CoT values. Local minima can be seen which correspond to bounding and pronking gaits. In the areas with large CoT, the *Minitaur* simulation did not have enough energy input during the simulation and therefore was unable to move forward.

C. Refined Results

Because the CoT minima occurred during smaller periods, the second simulation used a narrower period space, starting at 0.25s and ending at 1s. The period offset space was again 0 to 1. This entire parameter space was searched for symmetric and anti-symmetric gaits. The parameter space was narrowed in order to
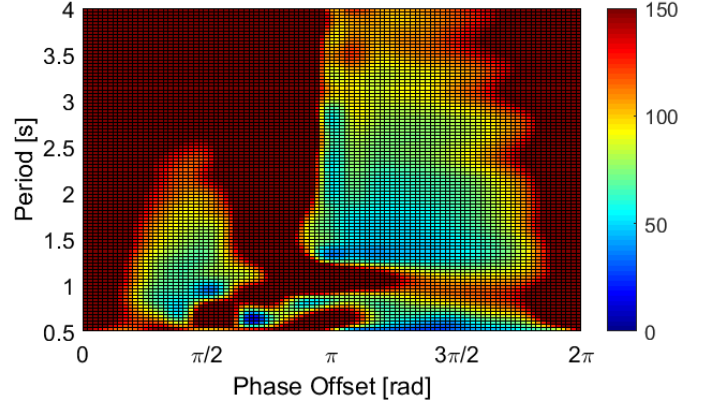

Figure 2: CoT for left/right symmetric gaits

The CoT heat map for left/right anti-symmetric gaits similarly yielded local minima which corresponded with walking and trotting gaits (fig. 3). In both heat maps, the minimum CoT occurred at very small periods, which is in accordance with biology where smaller animals tend to have gaits with higher frequencies.
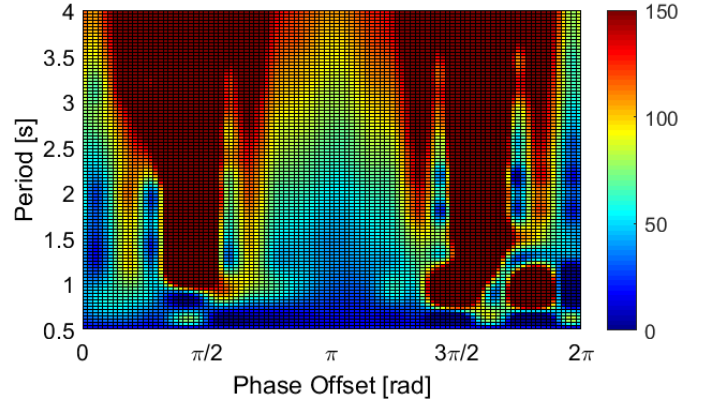

Figure 3: CoT for left/right anti-symmetric gaits

search more parameters in the space that produced lower CoT gaits.

The path trajectory for the simulation was changed because in the first experiment, the *Minitaur* was unable to lift its legs off of the ground due to an inadequate path trajectory. Therefore, the elliptical path trajectory for the simulation was a semi-major axis with radius $0.5\ell_{leg}$ and a semi-minor axis of radius $0.3\ell_{leg}$, which are trotting trajectories for horses (McMahon 1985).

The minimum in CoT for left/right symmetric gaits was 34.6 occurring at a period of 0.58s and a phase offset of 1.1π (fig. 4). The simulation was unstable in every phase offset condition at periods below 0.5s. In

the left/right anti-symmetric gaits, the minimum CoT was 11.5 occurring at a period of 0.33s and a phase offset of 0.9π (fig. 5). The simulation had unstable gaits at every phase offset below 0.45π and above 1.1π.
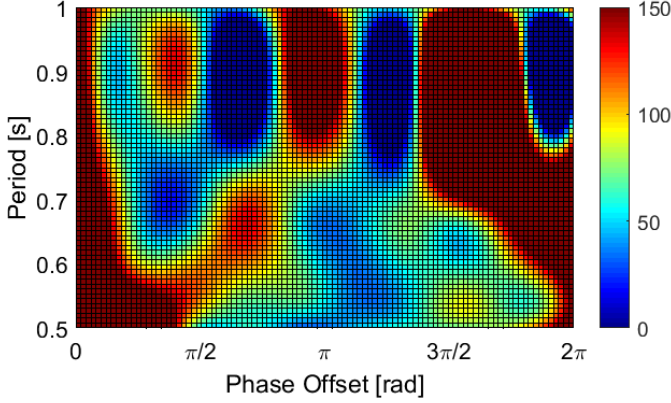

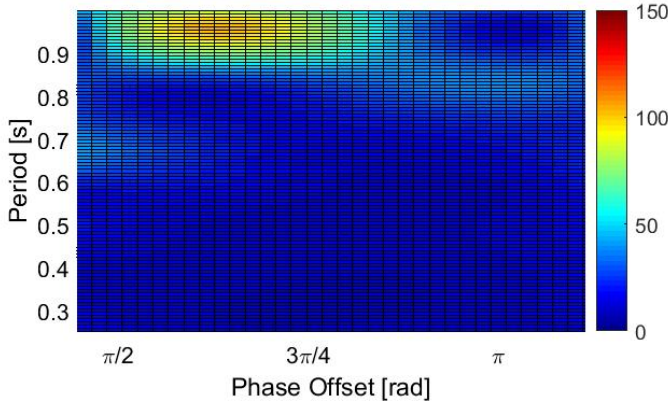**Figure 4:** *CoT for left/right symmetric gaits at smaller periods*

Figure 5: *CoT for left/right anti-symmetric gaits at smaller periods*

IV. Discussion

The framework developed has been studied under elliptical pattern with emphasis on the fore lag and period of gait. Given the same path trajectory for all gaits, the optimal gait parameters for left/right symmetry was a 0.58s period with a phase offset of 1.1π while left/right anti-symmetry had an optimal gait at a 0.33s period and 0.9π offset, corresponding to a bounding and trotting gait, respectively. Frames showing each gait are given in figs. 6 and 7. In Hildebrand's study, horse footfalls were shown throughout a stride in several types of gaits. In running trots, the phase offset between the fore and rear legs was approximately π, which is similar to the *Minitaur*'s optimal gait of 0.9π phase offset (Hildebrand 1965).
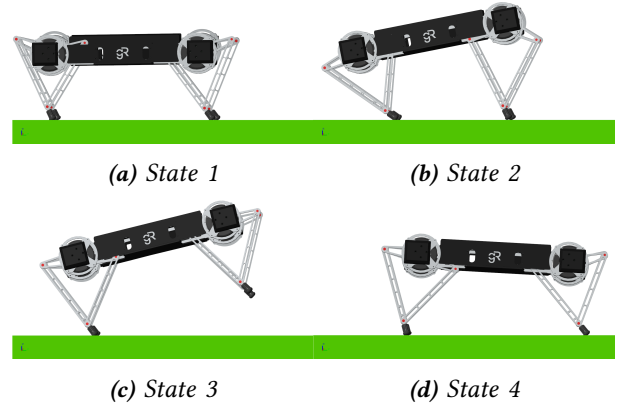

(a) State 1   *(b) State 2*

(c) State 3   *(d) State 4*

Figure 6: *Sample symmetric gait with* period $0.58s$, lag 1.12π.

(a) State 1   *(b) State 2*

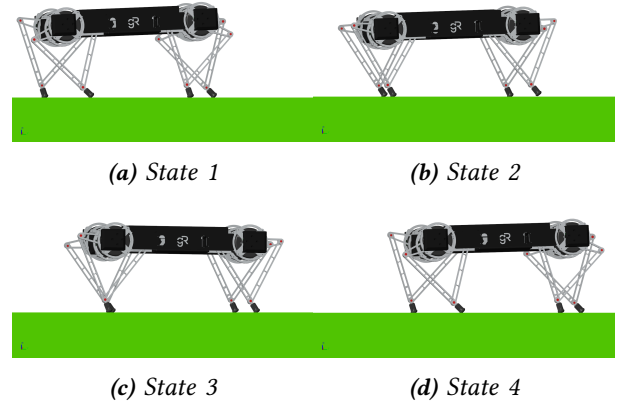*(c) State 3*   *(d) State 4*

Figure 7: *Sample asymmetric gait with* period $0.33s$, lag 0.9π.

A. Limitations

The CoT for our models were much higher than in biological systems. The minimum CoT that we found were 34.6 for left/right symmetric gaits and 11.5 for anti-symmetric gaits while biological systems tend to have CoT values around 0.1-0.15. These inefficiencies from the simulation could have come from poor tuning of the motor controllers. Because we were interested in energy cost due to different gait parameters, we did not optimize the PID gains for the motor controller. Due to the speed of the simulator, we were limited in the number of parameters that we could choose to search. We decided that leg timing was more important than path trajectory for gait generation, so we selected leg timing parameters to optimize.

B. Future Directions

Because gaits have different optimal path trajectories, we plan to optimize the elliptical path trajectories at the optimal parameters for period and phase offsets found

also using CMA-ES. We plan to extend the study by developing realistic foot trajectory patterns observed in quadrupeds to achieve results that are in correlation with ground reaction forces observed in quadrupeds. We also plan to use impedance control rather than position control for the motors. Lastly, we want to look into developing more advanced control architectures in order to improve robustness to uncertainty and disturbances in the environment.

REFERENCES

Alexander, R. McN. (Apr. 1990). "Three Uses for Springs in Legged Locomotion". In: *The International Journal of Robotics Research* 9.2, pp. 53–61.

Calandra, Roberto et al. (2016). "Bayesian optimization for learning gaits under uncertainty". In: *Annals of Mathematics and Artificial Intelligence* 76.1-2, pp. 5–23.

Full, Robert J and Daniel E Koditschek (1999). "Templates and anchors: neuromechanical hypotheses of legged locomotion on land". In: *Journal of Experimental Biology* 202.23, pp. 3325–3332.

Geyer, H., A. Seyfarth, and R. Blickhan (Nov. 2006). "Compliant leg behaviour explains basic dynamics of walking and running". In: *Proceedings of the Royal Society B: Biological Sciences* 273.1603, pp. 2861–2867.

Ghost Robotics LLC (2016). *Minitaur Robot Platform*. http://www.ghostrobotics.io/minitaur.

Hansen, Nikolaus (2011). *CMA-ES MATLAB Minimalistic Implementation*. http://cma.gforge.inria.fr/purecmaes.m.

Hansen, Nikolaus and Andreas Ostermeier (2001). "Completely derandomized self-adaptation in evolution strategies". In: *Evolutionary computation* 9.2, pp. 159–195.

Hegland, Norman C. and C. Richard Taylor (1988). "Speed, Stride Frequency and Energetic Cost per Stride: How Do They Change with Body Size and Gait?" In: *Journal of Experimental Biology* 138, pp. 301–318.

Hildebrand, Milton (1965). "Symmetrical Gaits of Horses". In: *Science* 150.3697, pp. 701–708. eprint: http://science.sciencemag.org/content/150/3697/701.full.pdf.

Hoyt, Donald F. and C. Richard Taylor (1981). "Gait and the energetics of locomotion in horses". In: *Nature* 292.5820, pp. 239–240.

Lizotte, Daniel J et al. (2007). "Automatic Gait Optimization with Gaussian Process Regression." In: *IJCAI*. Vol. 7, pp. 944–949.

McMahon, TA (1985). "The role of compliance in mammalian running gaits". In: *Journal of Experimental Biology* 115.5820, pp. 263–282.

Miller, Steve (2016). *Simscape Multibody Contact Forces Library*. https://www.mathworks.com/matlabcentral/fileexchange/47417-simscape-multibody-contact-forces-library.

Remy, C David (2011). "Optimal exploitation of natural dynamics in legged locomotion". PhD thesis. Massachusetts Institute of Technology.

Srinivasan, Manoj (2010). "Fifteen observations on the structure of energy-minimizing gaits in many simple biped models". In: *Journal of The Royal Society Interface*, rsif20090544.

Von Karman, Theodore and G Gabrielli (1950). "What price speed? Specific power required for propulsion of vehicles". In: *Mechanical Engineering* 72, pp. 775–781.

Wu, Albert and Hartmut Geyer (Oct. 2013). "The 3-D Spring–Mass Model Reveals a Time-Based Deadbeat Control for Highly Robust Running and Steering in Uncertain Environments". In: *IEEE TRANSACTIONS ON ROBOTICS* 29.5, pp. 1114–1124.