Rounded pouch main panel / CUT 2

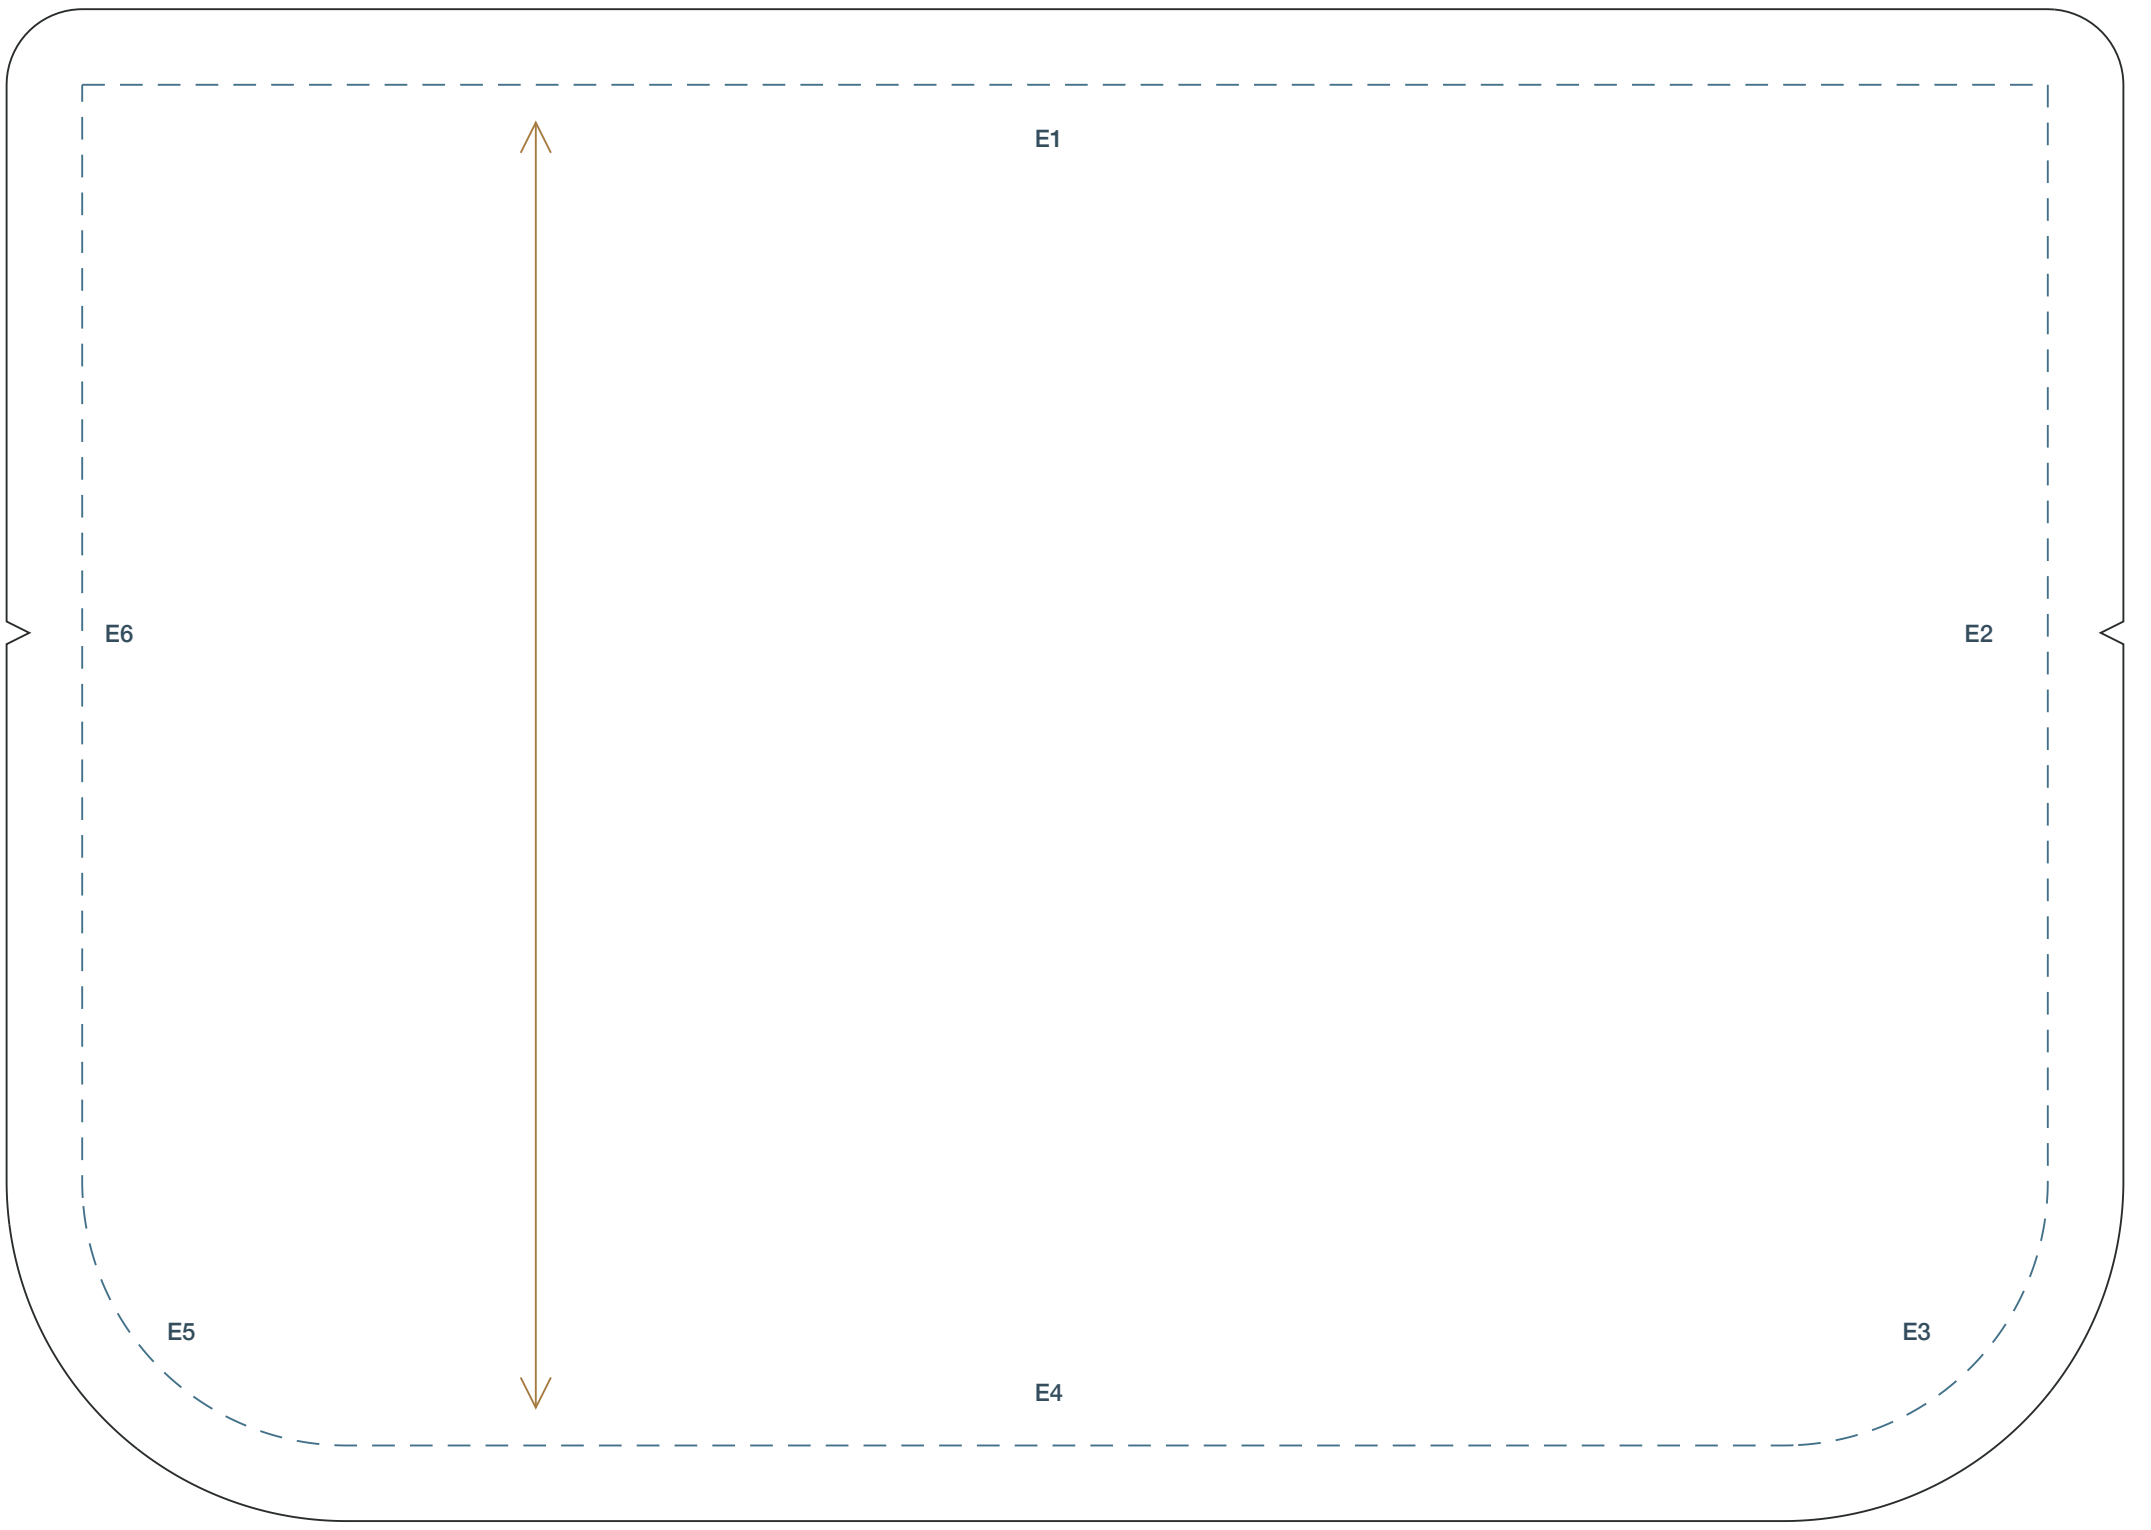

Material: flight-nylon · Cut extent 280.0 × 200.0 mm

Original unlined pouch study: initial stitch outline 260.0 × 180.0 mm; initial lower radius 35.0 mm. Cut2. Baste the zipper between each main-panel top and facing. Open zipper partway before sewing matching side/curve/bottom seams. Clip curved allowances carefully, turn through zipper, press. Sew a fabric test first; capacity, zipper fit, and construction are not calibrated.

Zipper facing / CUT 2

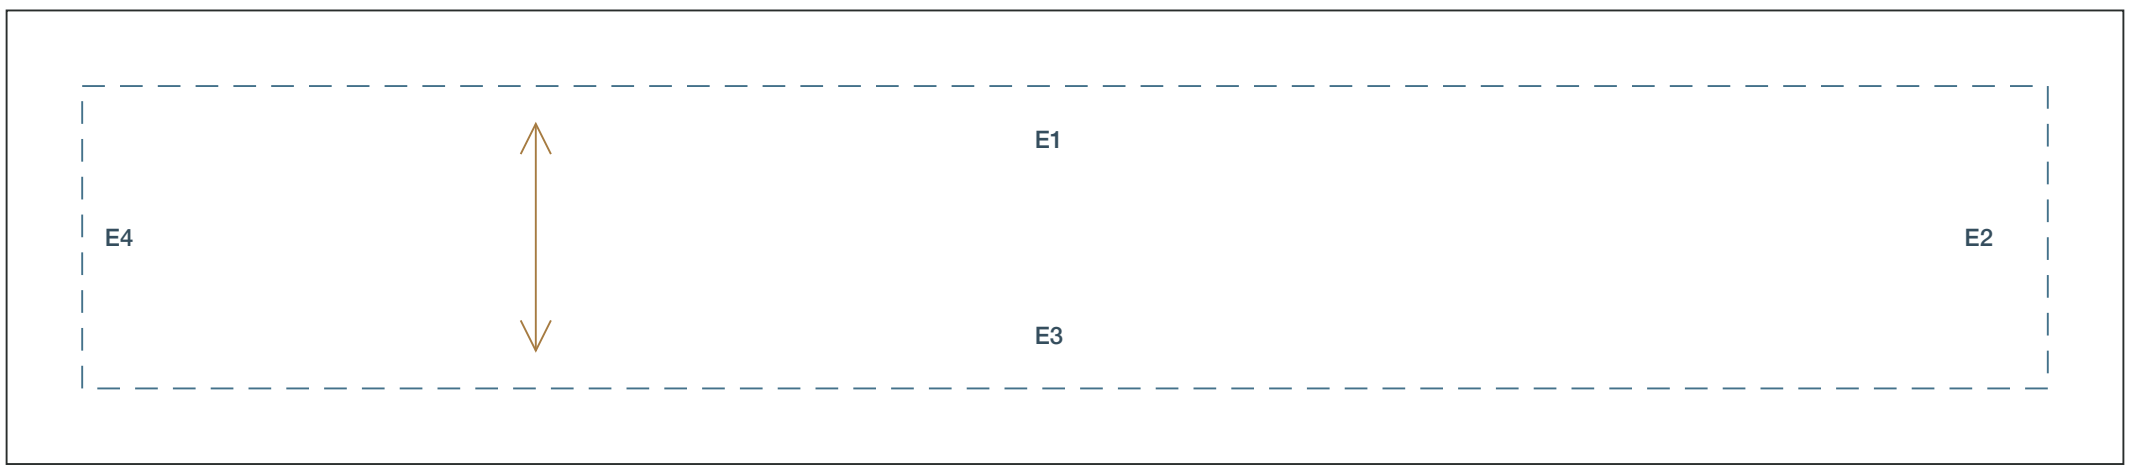

Material: flight-nylon · Cut extent 280.0 × 60.0 mm

Cut2. Match the full-length top edge to the main-panel zipper edge, one facing per side. Finish the free long edge. Choose zipper/tape for the actual cut opening and confirm a fabric test; no zipper hardware or fit is inferred.



50 × 50 mm
Print at 100% / actual size

Panel perimeter 1: Rounded pouch main panel / copy 1 / E2 ↔ Rounded pouch main panel / copy 2 / E2
145.0 / 145.0 mm · match · reverse edge direction

Lower curved seam 2: Rounded pouch main panel / copy 1 / E3 ↔ Rounded pouch main panel / copy 2 / E3
55.0 / 55.0 mm · match · reverse edge direction

Panel perimeter 3: Rounded pouch main panel / copy 1 / E4 ↔ Rounded pouch main panel / copy 2 / E4
190.0 / 190.0 mm · match · reverse edge direction

Lower curved seam 4: Rounded pouch main panel / copy 1 / E5 ↔ Rounded pouch main panel / copy 2 / E5
55.0 / 55.0 mm · match · reverse edge direction

Panel perimeter 5: Rounded pouch main panel / copy 1 / E6 ↔ Rounded pouch main panel / copy 2 / E6
145.0 / 145.0 mm · match · reverse edge direction

Zipper facing 1: Rounded pouch main panel / copy 1 / E1 ↔ Zipper facing / copy 1 / E1
260.0 / 260.0 mm · match · reverse edge direction

Zipper facing 2: Rounded pouch main panel / copy 2 / E1 ↔ Zipper facing / copy 2 / E1
260.0 / 260.0 mm · match · reverse edge direction