
# FORM / TILED SEWING PATTERN


Sewing pattern

Source 300.0 × 538.0 mm · 3 rows × 2 columns · 6 tiles + this calibration sheet

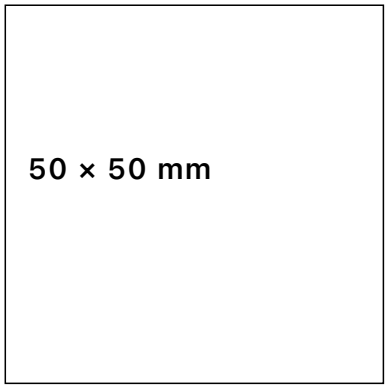


Print this page at 100% / actual size. Measure both square directions before assembling the pattern. Do not use Fit or Shrink.


Match row/column labels. Cut straight between paired gray gutter ticks; butt matching trimmed edges and tape. Overlap is repeated reference. Black cut and blue stitch geometry stay at full scale.



100 mm rule

Margins are declared for your own printer; no device imageable area is assumed. Every source label, guide, note and final partial tile is preserved.

Rounded pouch main panel / CUT 2

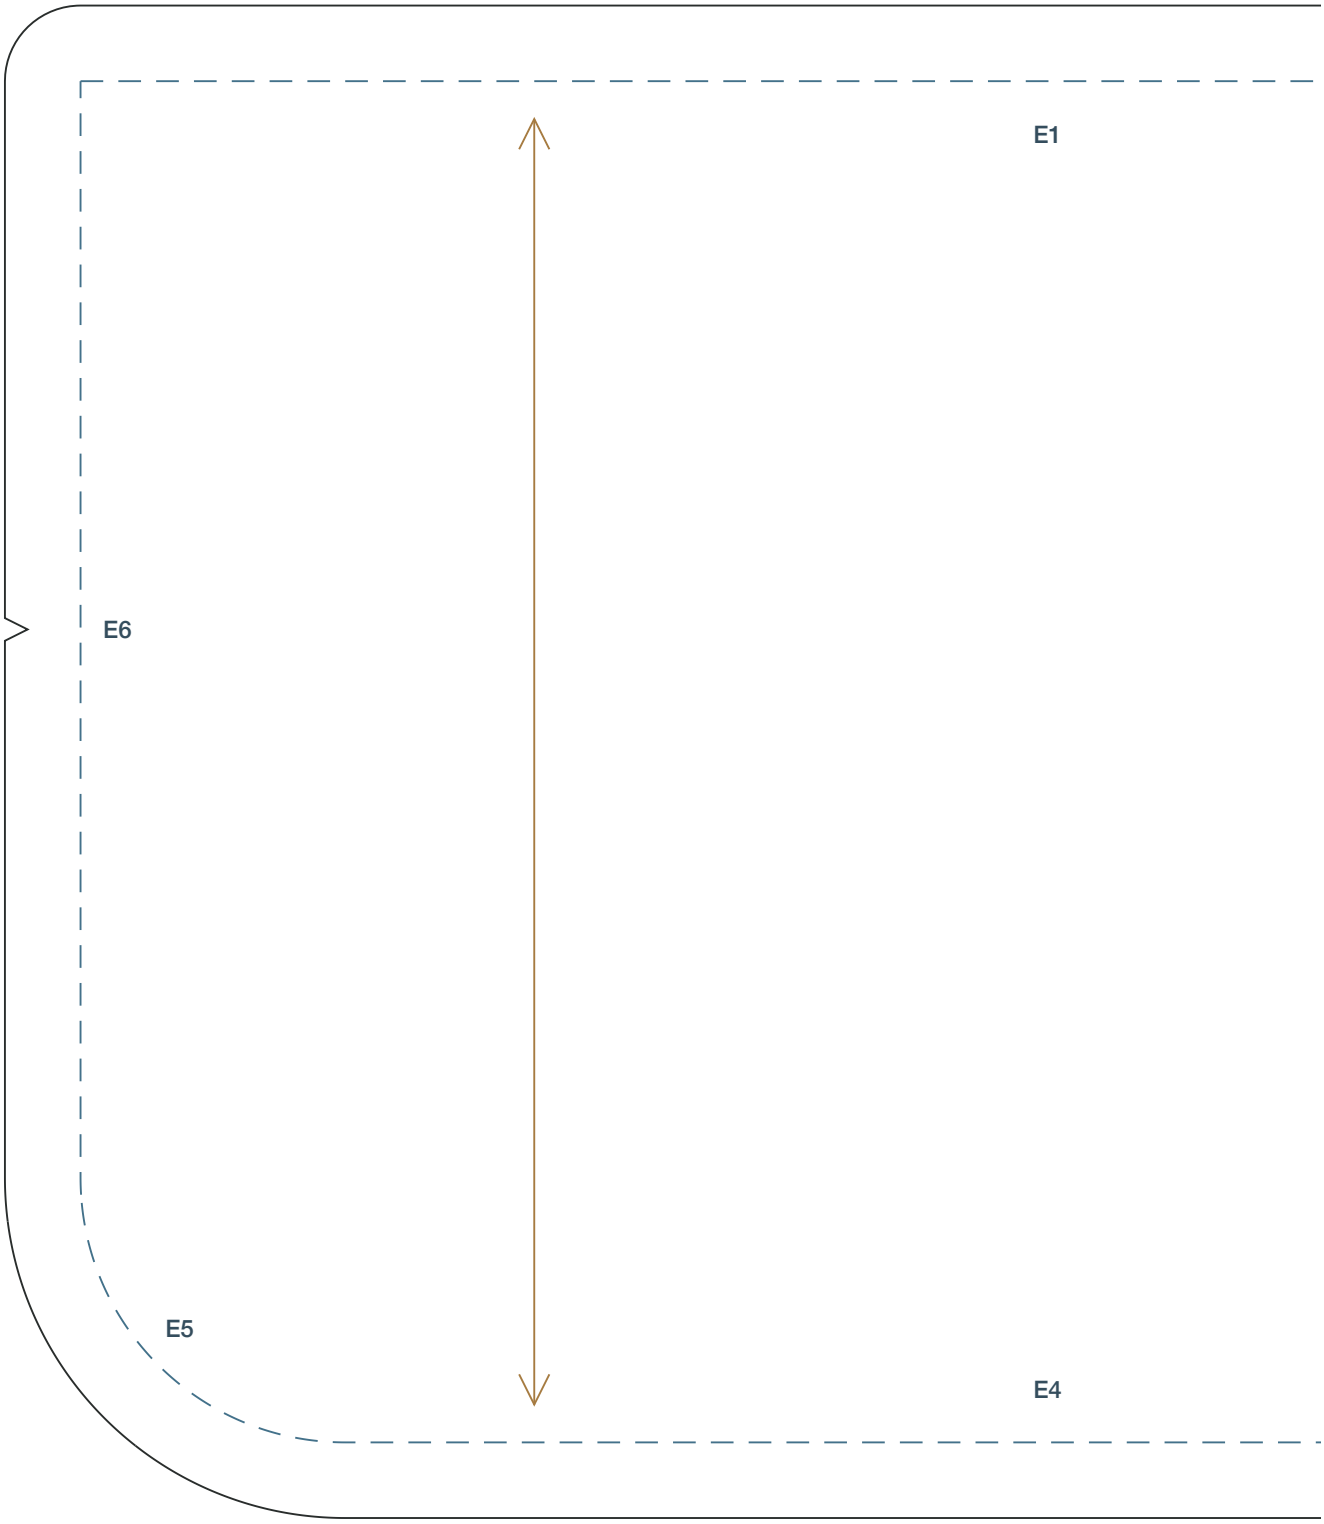


Material: flight-nylon · Cut extent 280.0 × 200.0 mm


Original unlined pouch study: initial stitch outline 260.0 × 180.0 mm; initial lower radius 35.0 mm. Cut2. Baste the zipper sewing matching side/curve/bottom seams. Clip curved allowances carefully, turn through zipper, press. Sew a fabric t

Zipper facing / CUT 2





zipper between each main-panel top and facing. Open zipper partway before fabric test first; capacity, zipper fit, and construction are not calibrated.

Zipper facing / CUT 2

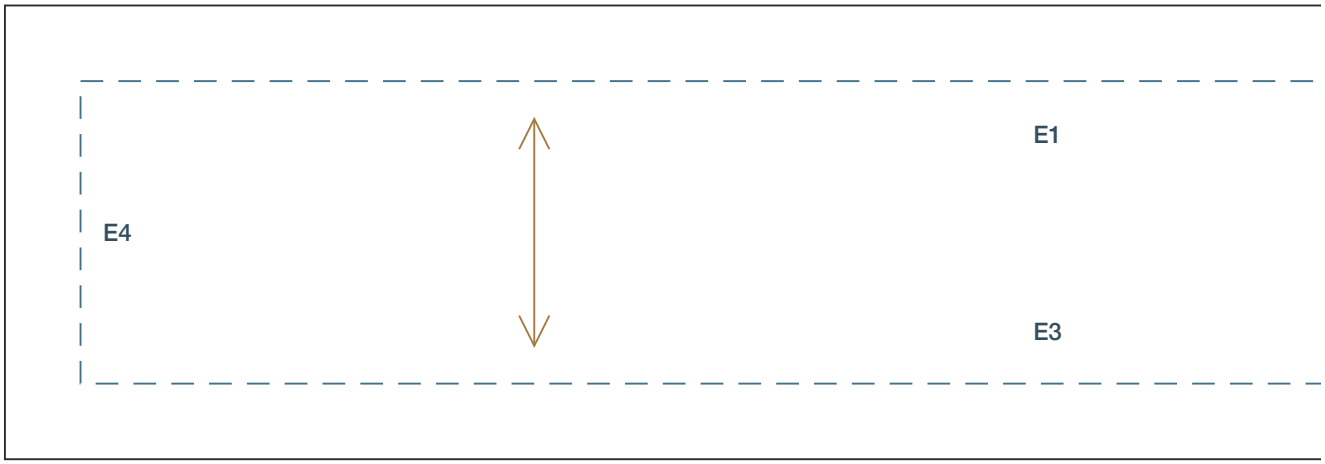


Material: flight-nylon · Cut extent 280.0 × 60.0 mm

Cut2. Match the full-length top edge to the main-panel zipper edge, one facing per side. Finish the free long edge. Choo
zipper hardware or fit is inferred.



50 × 50 mm
Print at 100% / actual size

Panel perimeter 1: Rounded pouch main panel / copy 1 / E2 ↔ Rounded pouch main panel / copy 2 / E2
145.0 / 145.0 mm · match · reverse edge direction


Lower curved seam 2: Rounded pouch main panel / copy 1 / E3 ↔ Rounded pouch main panel / copy 2 / E3
55.0 / 55.0 mm · match · reverse edge direction

Panel perimeter 3: Rounded pouch main panel / copy 1 / E4 ↔ Rounded pouch main panel / copy 2 / E4
190.0 / 190.0 mm · match · reverse edge direction

Lower curved seam 4: Rounded pouch main panel / copy 1 / E5 ↔ Rounded pouch main panel / copy 2 / E5
55.0 / 55.0 mm · match · reverse edge direction

Panel perimeter 5: Rounded pouch main panel / copy 1 / E6 ↔ Rounded pouch main panel / copy 2 / E6
145.0 / 145.0 mm · match · reverse edge direction

Zipper facing 1: Rounded pouch main panel / copy 1 / E1 ↔ Zipper facing / copy 1 / E1

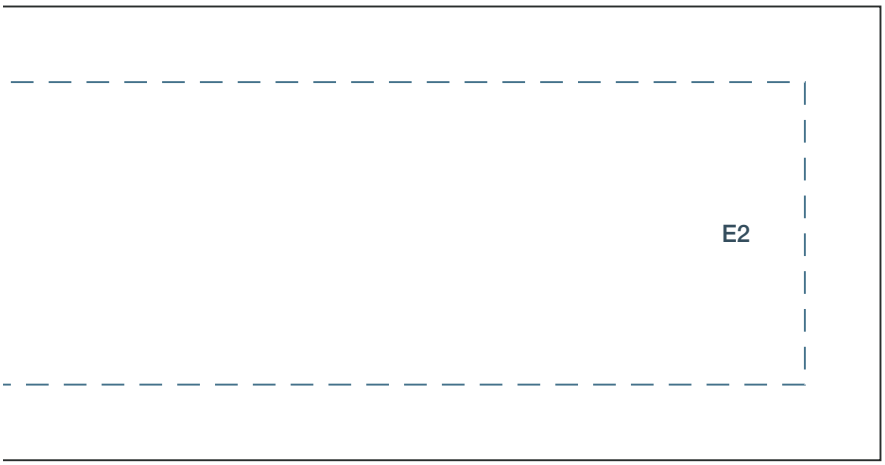


e. Choose zipper/tape for the actual cut opening and confirm a fabric test; no

145.0 / 145.0 mm · match · reverse edge direction

Zipper facing 1: Rounded pouch main panel / copy 1 / E1 ↔ Zipper facing / copy 1 / E1

260.0 / 260.0 mm · match · reverse edge direction

Zipper facing 2: Rounded pouch main panel / copy 2 / E1 ↔ Zipper facing / copy 2 / E1

260.0 / 260.0 mm · match · reverse edge direction