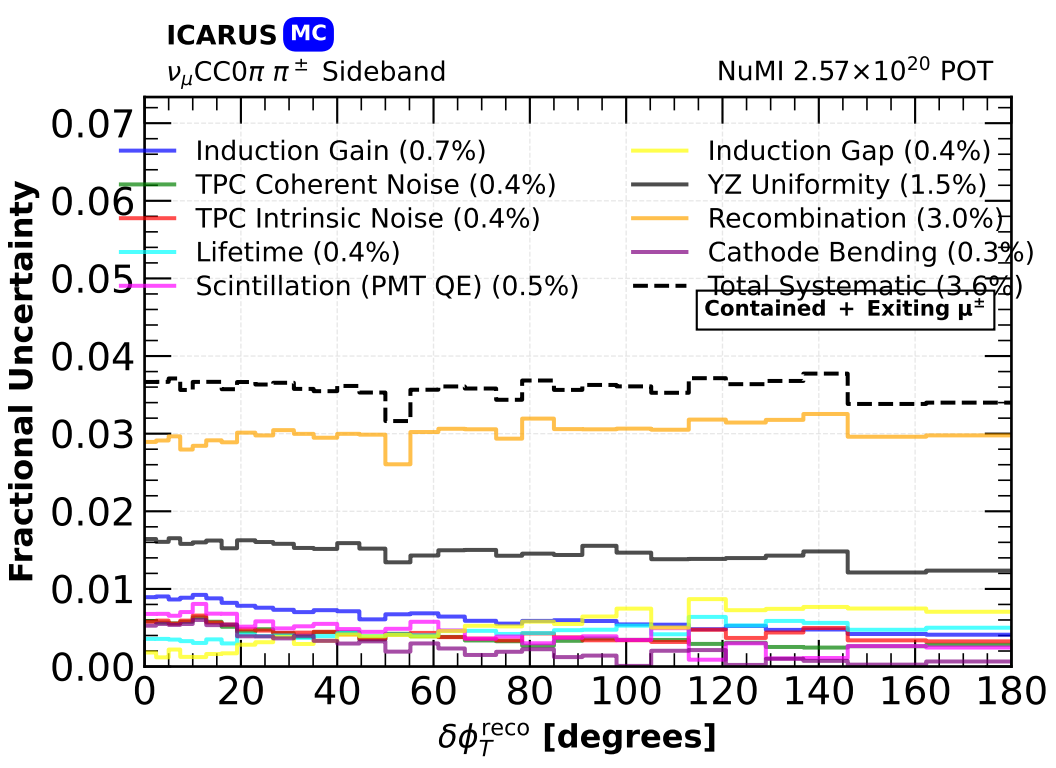
ICARUS MC
$\nu_\mu$CC0$\pi$ $\pi^\pm$ Sideband
NuMI 2.57×10$^{20}$ POT
Induction Gain (0.7%)
TPC Coherent Noise (0.4%)
TPC Intrinsic Noise (0.4%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.5%)
Induction Gap (0.4%)
YZ Uniformity (1.5%)
Recombination (3.0%)
Cathode Bending (0.3%)
Total Systematic (3.6%)
Contained + Exiting μ±
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0
20
40
60
80
100
120
140
160
180
$\delta\phi_T^{\text{reco}}$ [degrees]