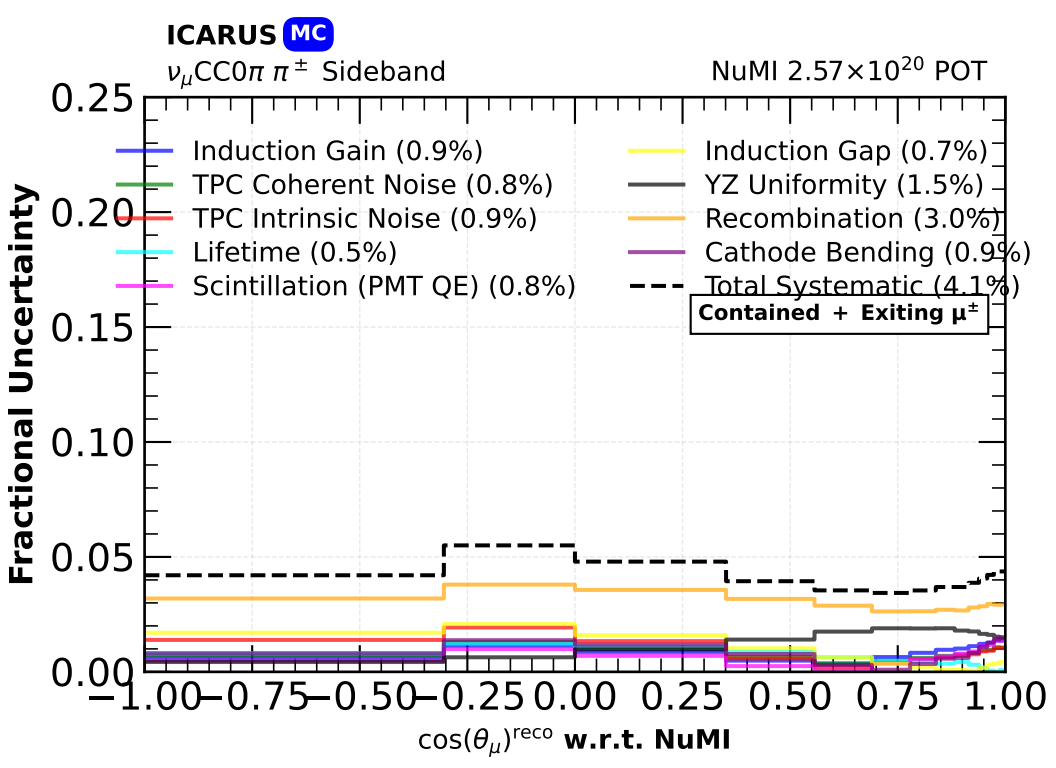
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.9%)
TPC Coherent Noise (0.8%)
TPC Intrinsic Noise (0.9%)
Lifetime (0.5%)
Scintillation (PMT QE) (0.8%)
Induction Gap (0.7%)
YZ Uniformity (1.5%)
Recombination (3.0%)
Cathode Bending (0.9%)
Total Systematic (4.1%)
Contained + Exiting μ$^\pm$
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
−1.00 −0.75 −0.50 −0.25 0.00 0.25 0.50 0.75 1.00
cos(θ_μ)^{reco} w.r.t. NuMI