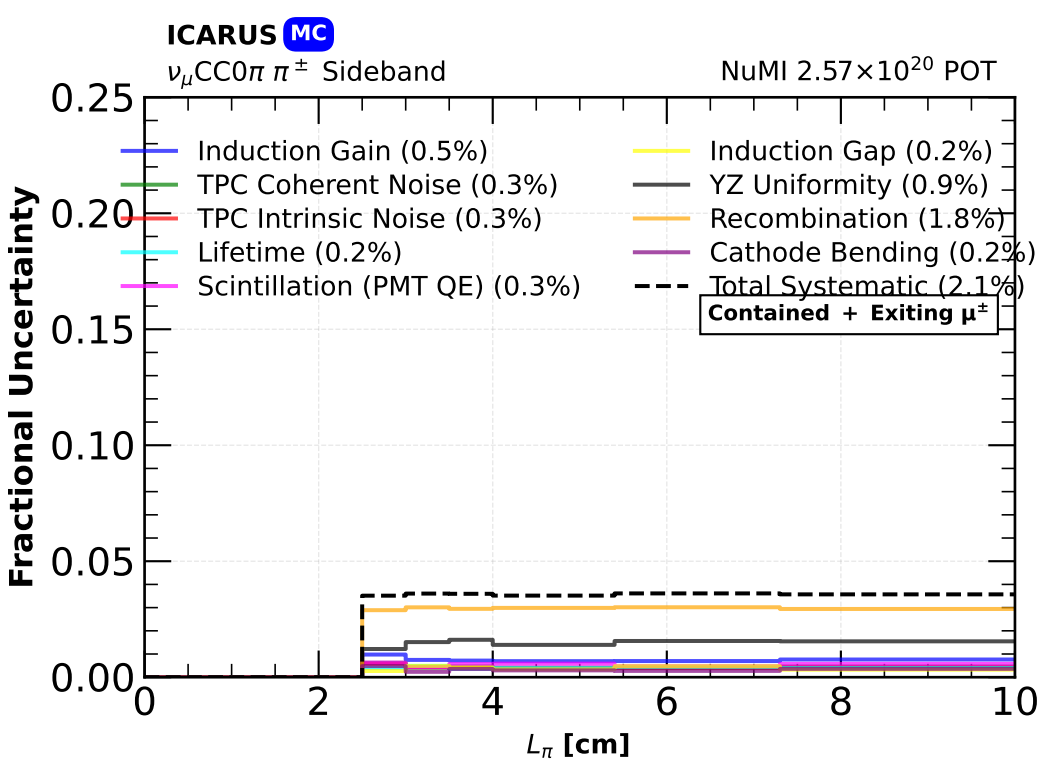
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.5%)
TPC Coherent Noise (0.3%)
TPC Intrinsic Noise (0.3%)
Lifetime (0.2%)
Scintillation (PMT QE) (0.3%)
Induction Gap (0.2%)
YZ Uniformity (0.9%)
Recombination (1.8%)
Cathode Bending (0.2%)
Total Systematic (2.1%)
Contained + Exiting μ±
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
2
4
6
8
10
L_π [cm]