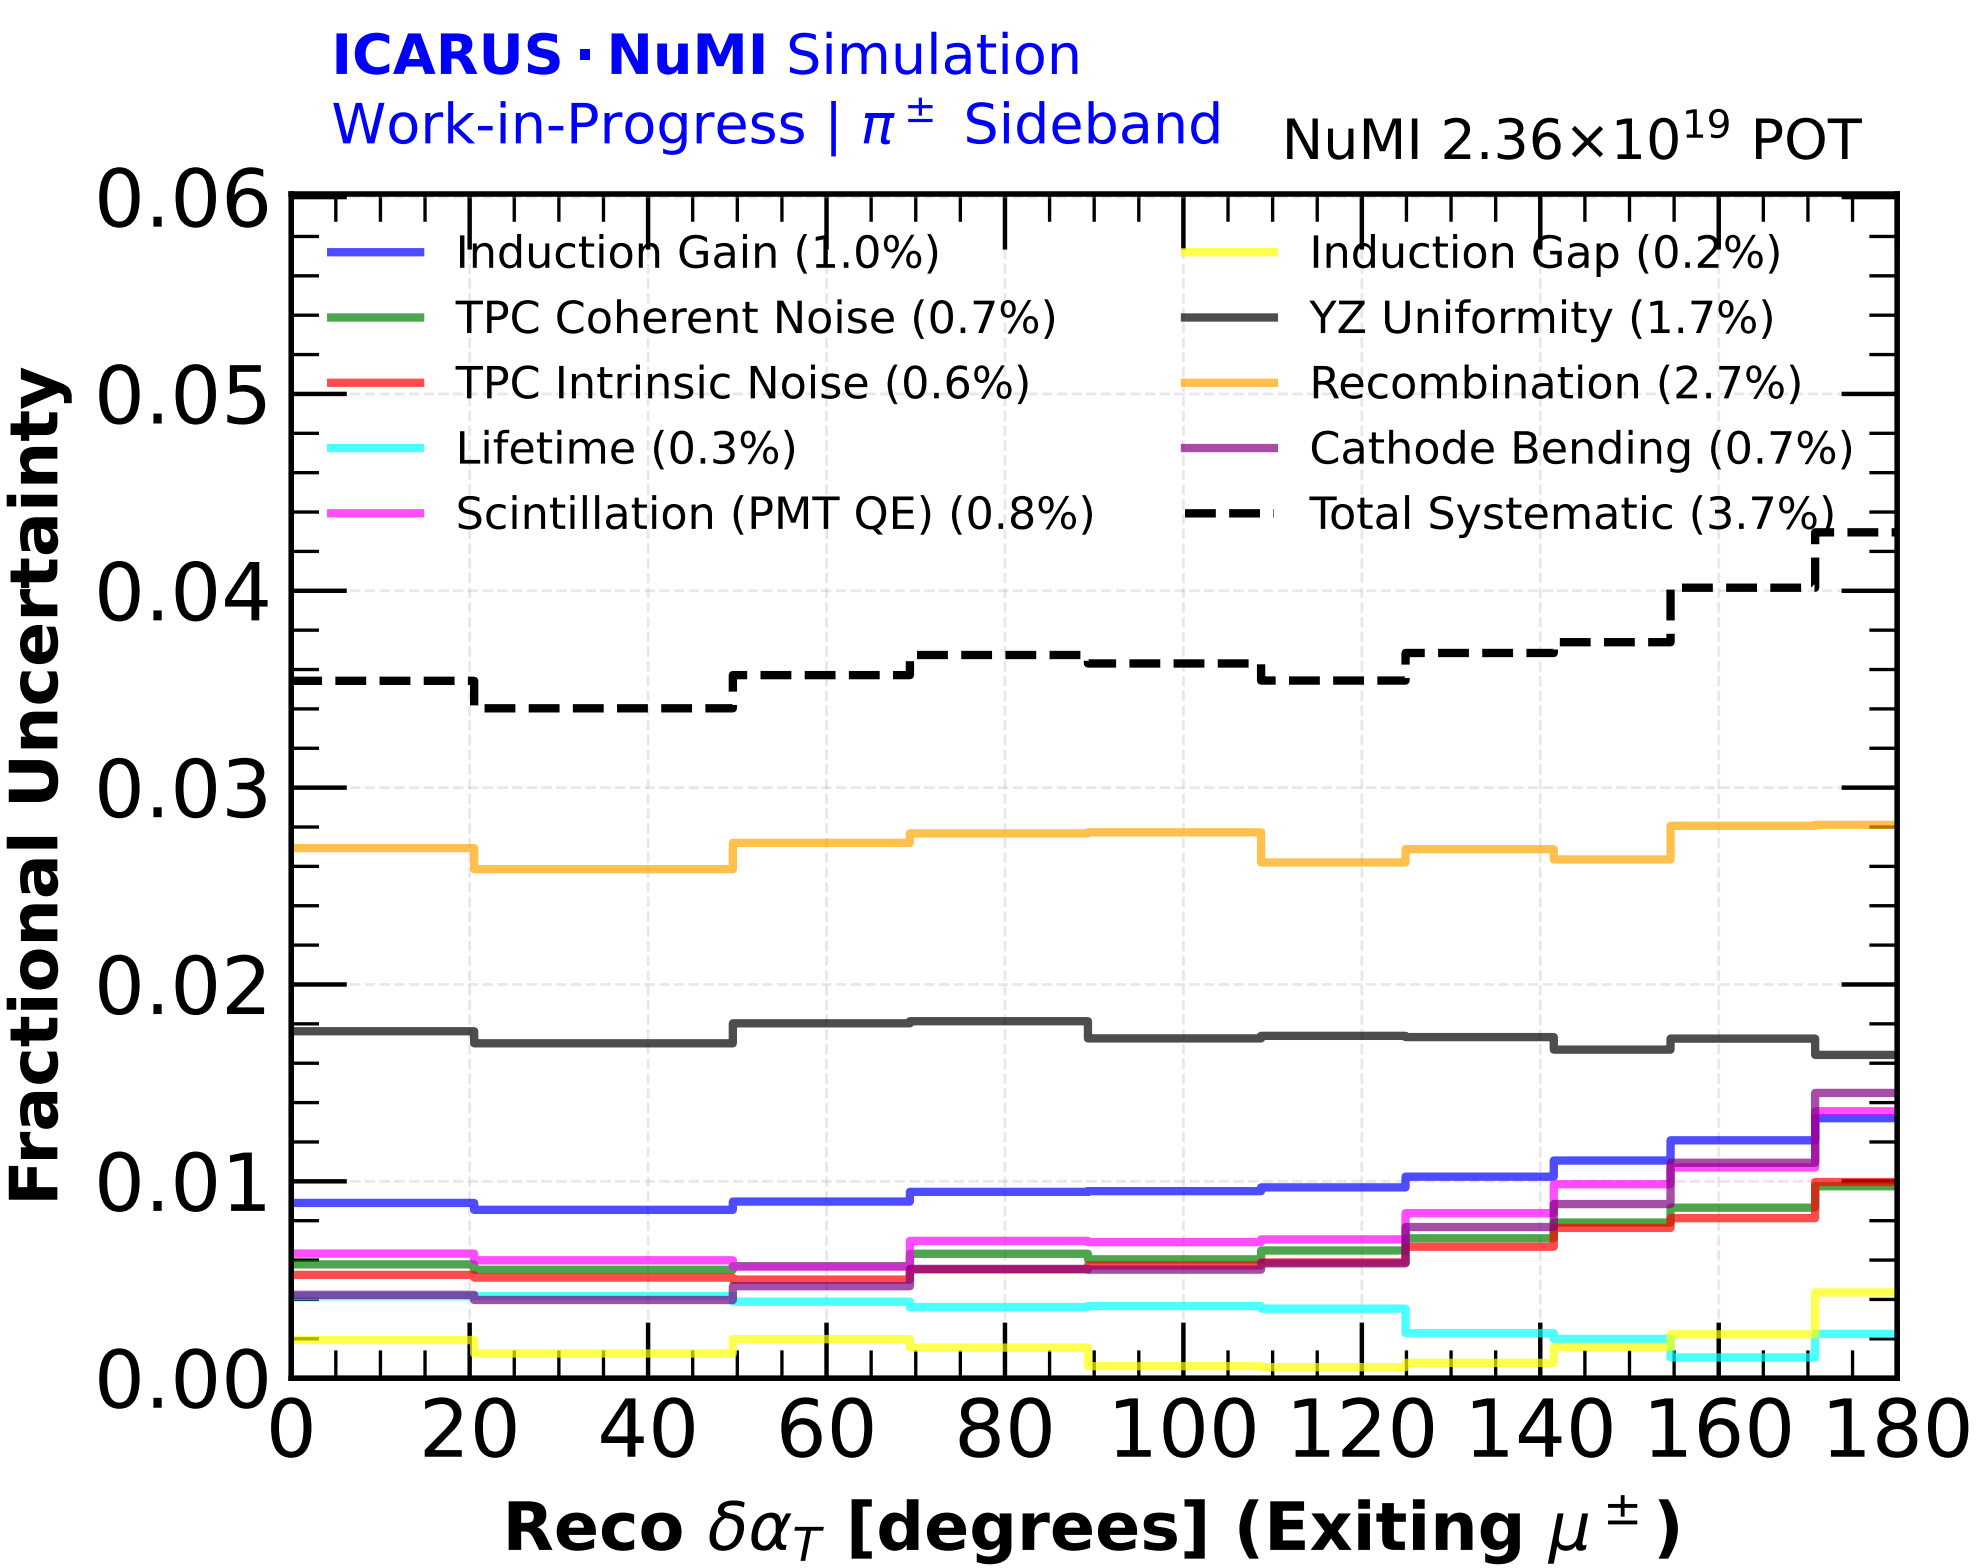
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (1.0%)
TPC Coherent Noise (0.7%)
TPC Intrinsic Noise (0.6%)
Lifetime (0.3%)
Scintillation (PMT QE) (0.8%)
Induction Gap (0.2%)
YZ Uniformity (1.7%)
Recombination (2.7%)
Cathode Bending (0.7%)
Total Systematic (3.7%)
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0
20
40
60
80
100
120
140
160
180
Reco δα_T [degrees] (Exiting μ±)