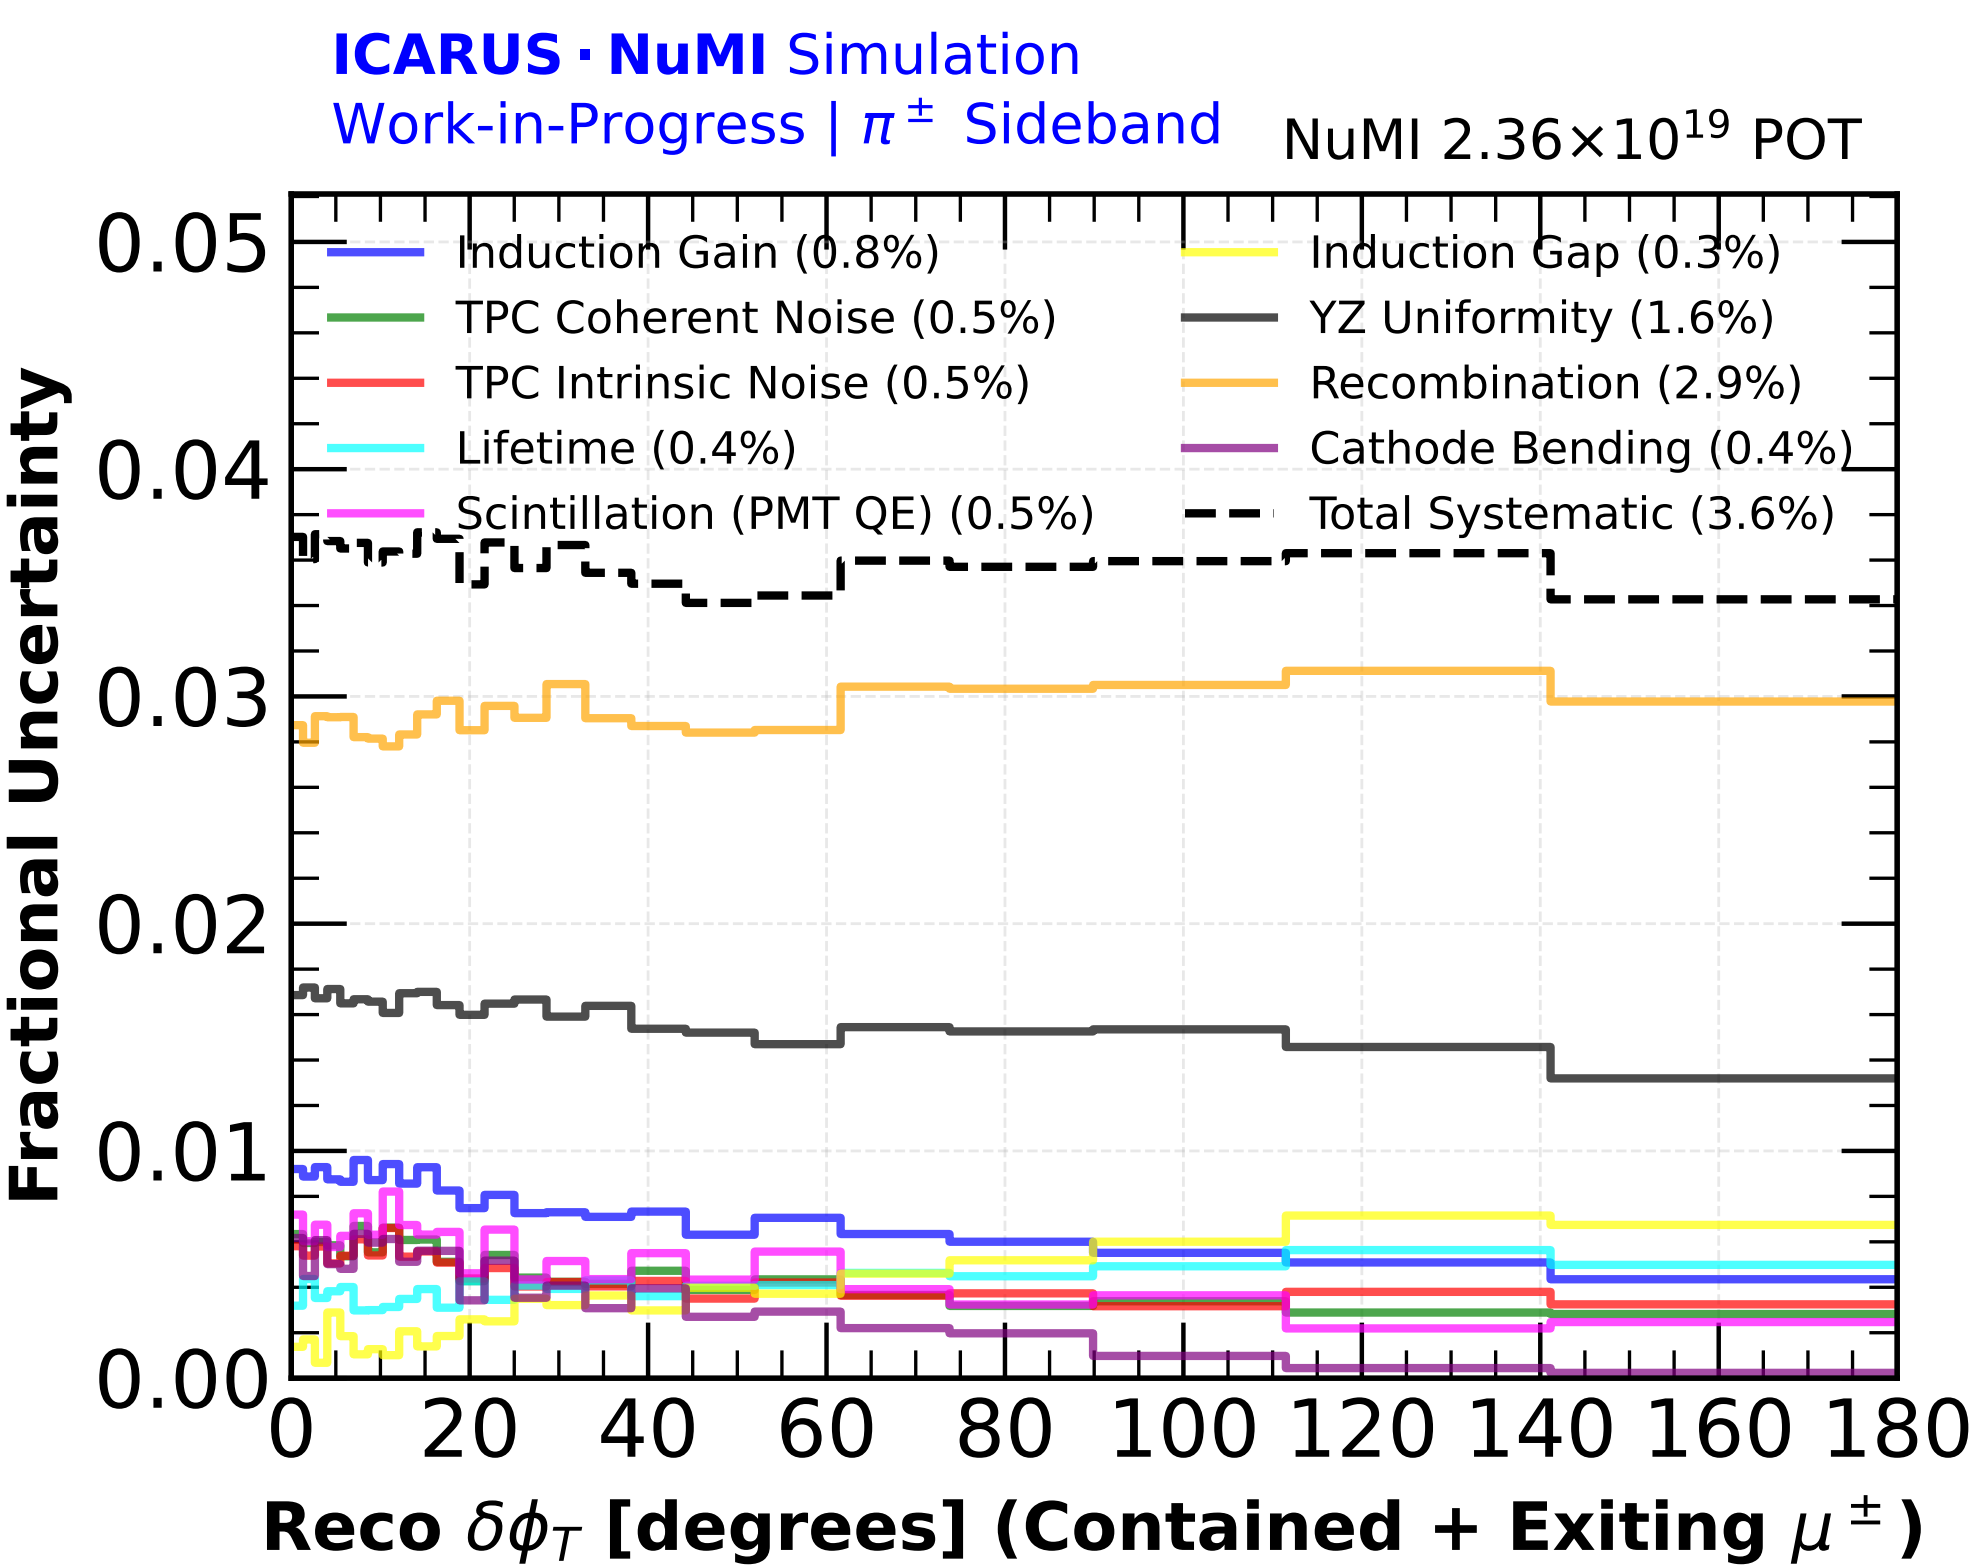
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (0.8%)
TPC Coherent Noise (0.5%)
TPC Intrinsic Noise (0.5%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.5%)
Induction Gap (0.3%)
YZ Uniformity (1.6%)
Recombination (2.9%)
Cathode Bending (0.4%)
Total Systematic (3.6%)
Fractional Uncertainty
0.05
0.04
0.03
0.02
0.01
0.00
0
20
40
60
80
100
120
140
160
180
Reco δφ_T [degrees] (Contained + Exiting μ±)