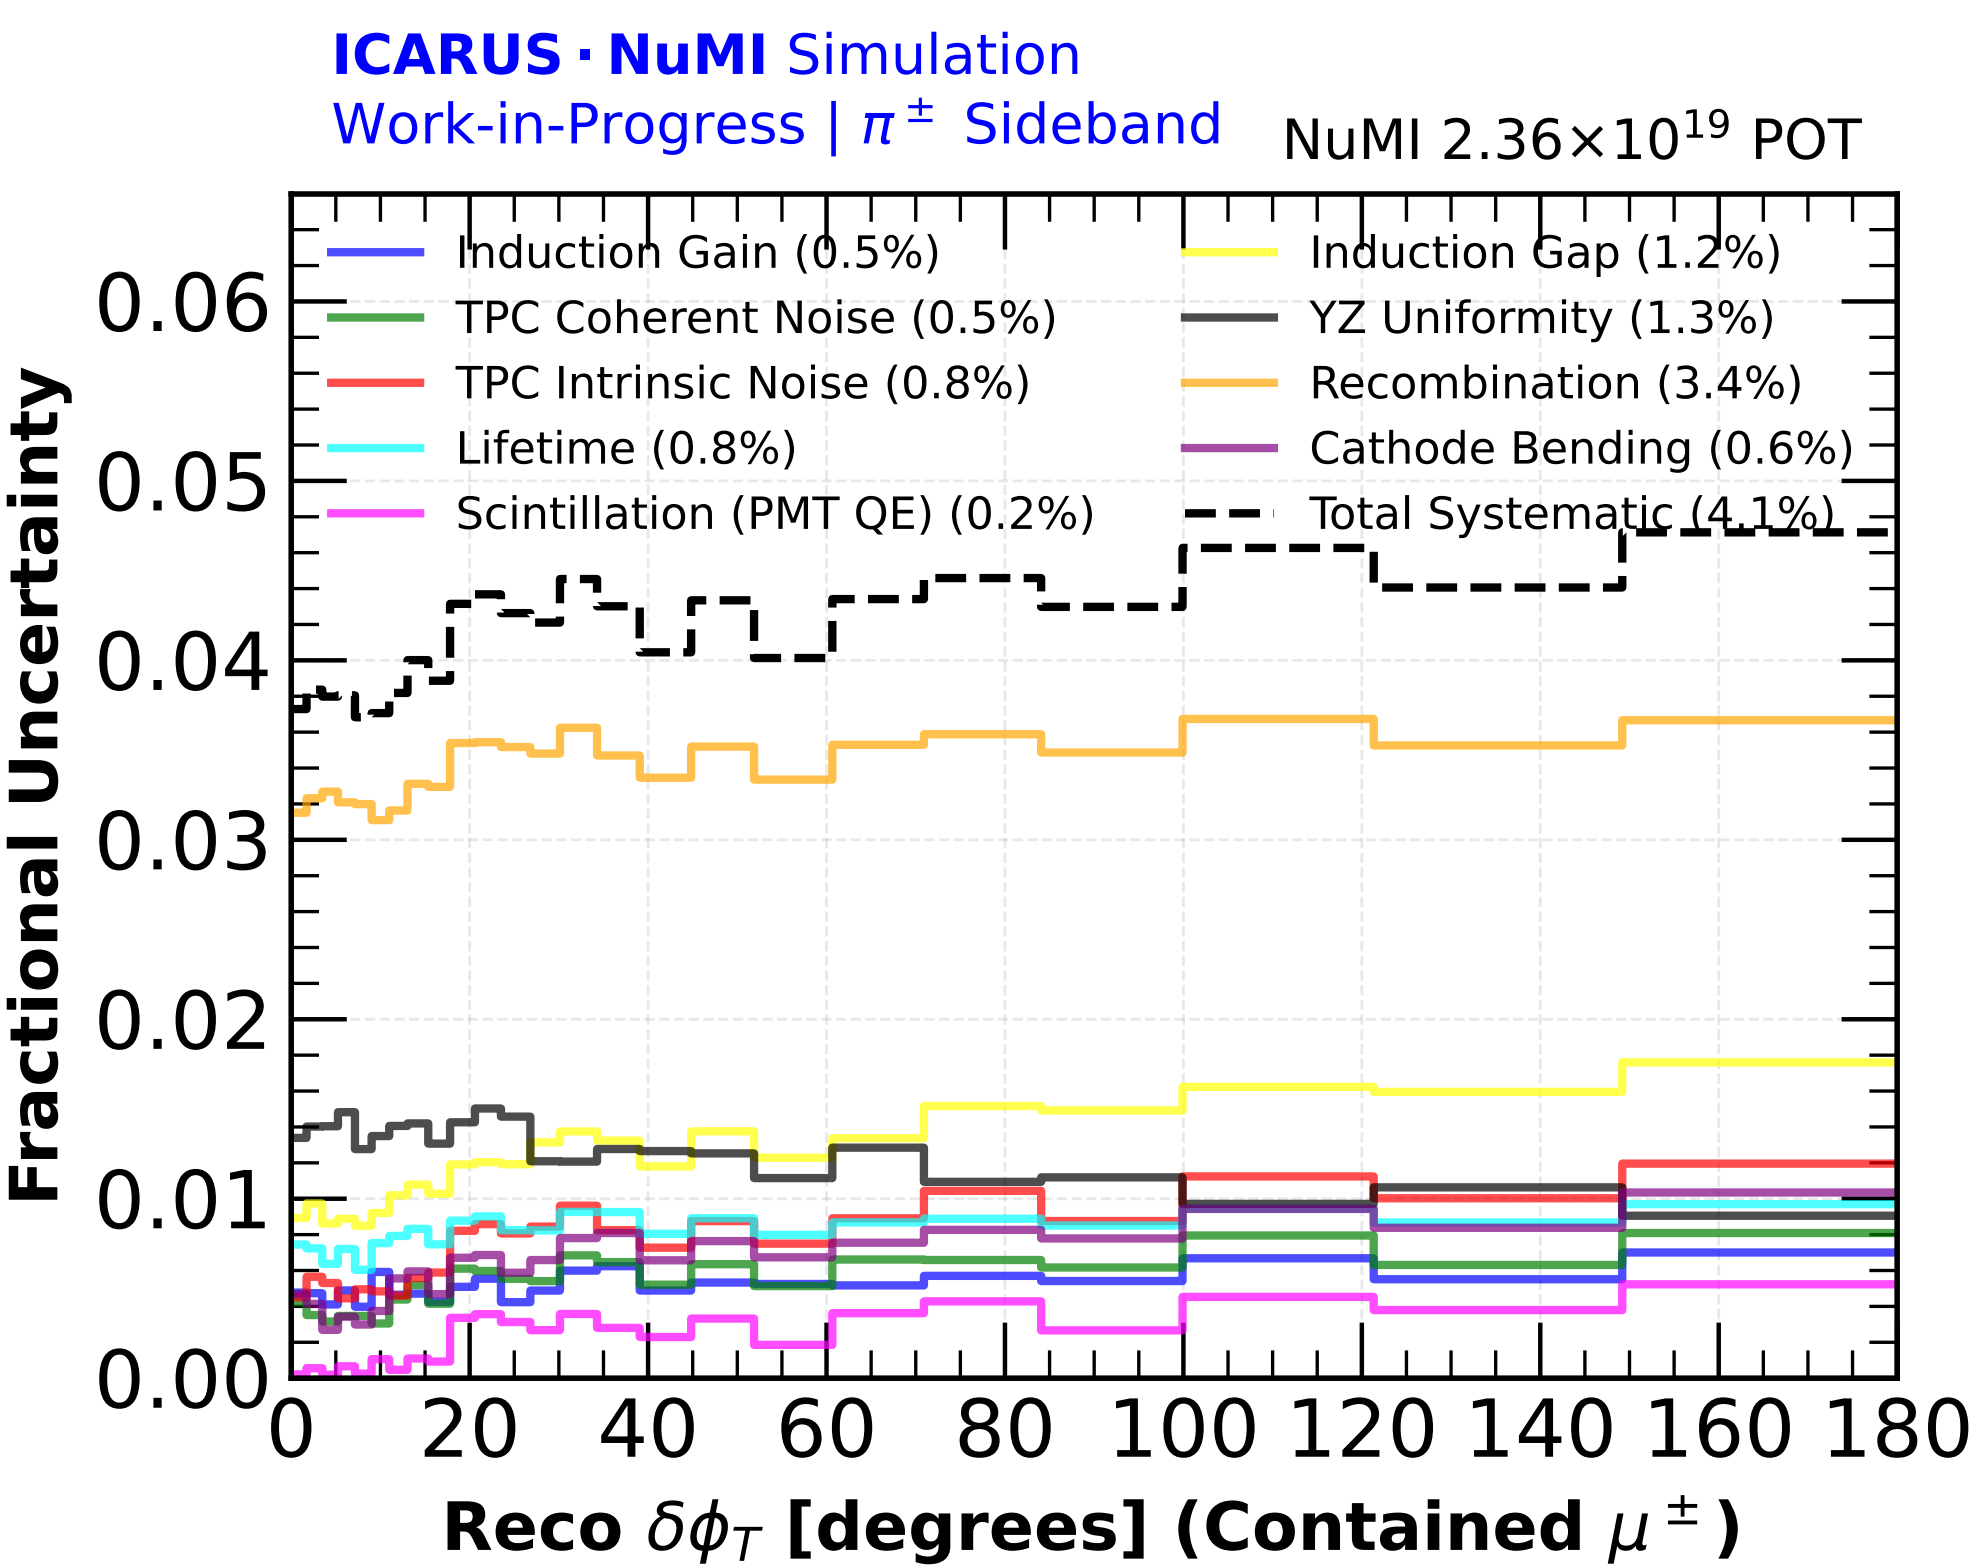
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (0.5%)
TPC Coherent Noise (0.5%)
TPC Intrinsic Noise (0.8%)
Lifetime (0.8%)
Scintillation (PMT QE) (0.2%)
Induction Gap (1.2%)
YZ Uniformity (1.3%)
Recombination (3.4%)
Cathode Bending (0.6%)
Total Systematic (4.1%)
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0
20
40
60
80
100
120
140
160
180
Reco δφ_T [degrees] (Contained μ±)