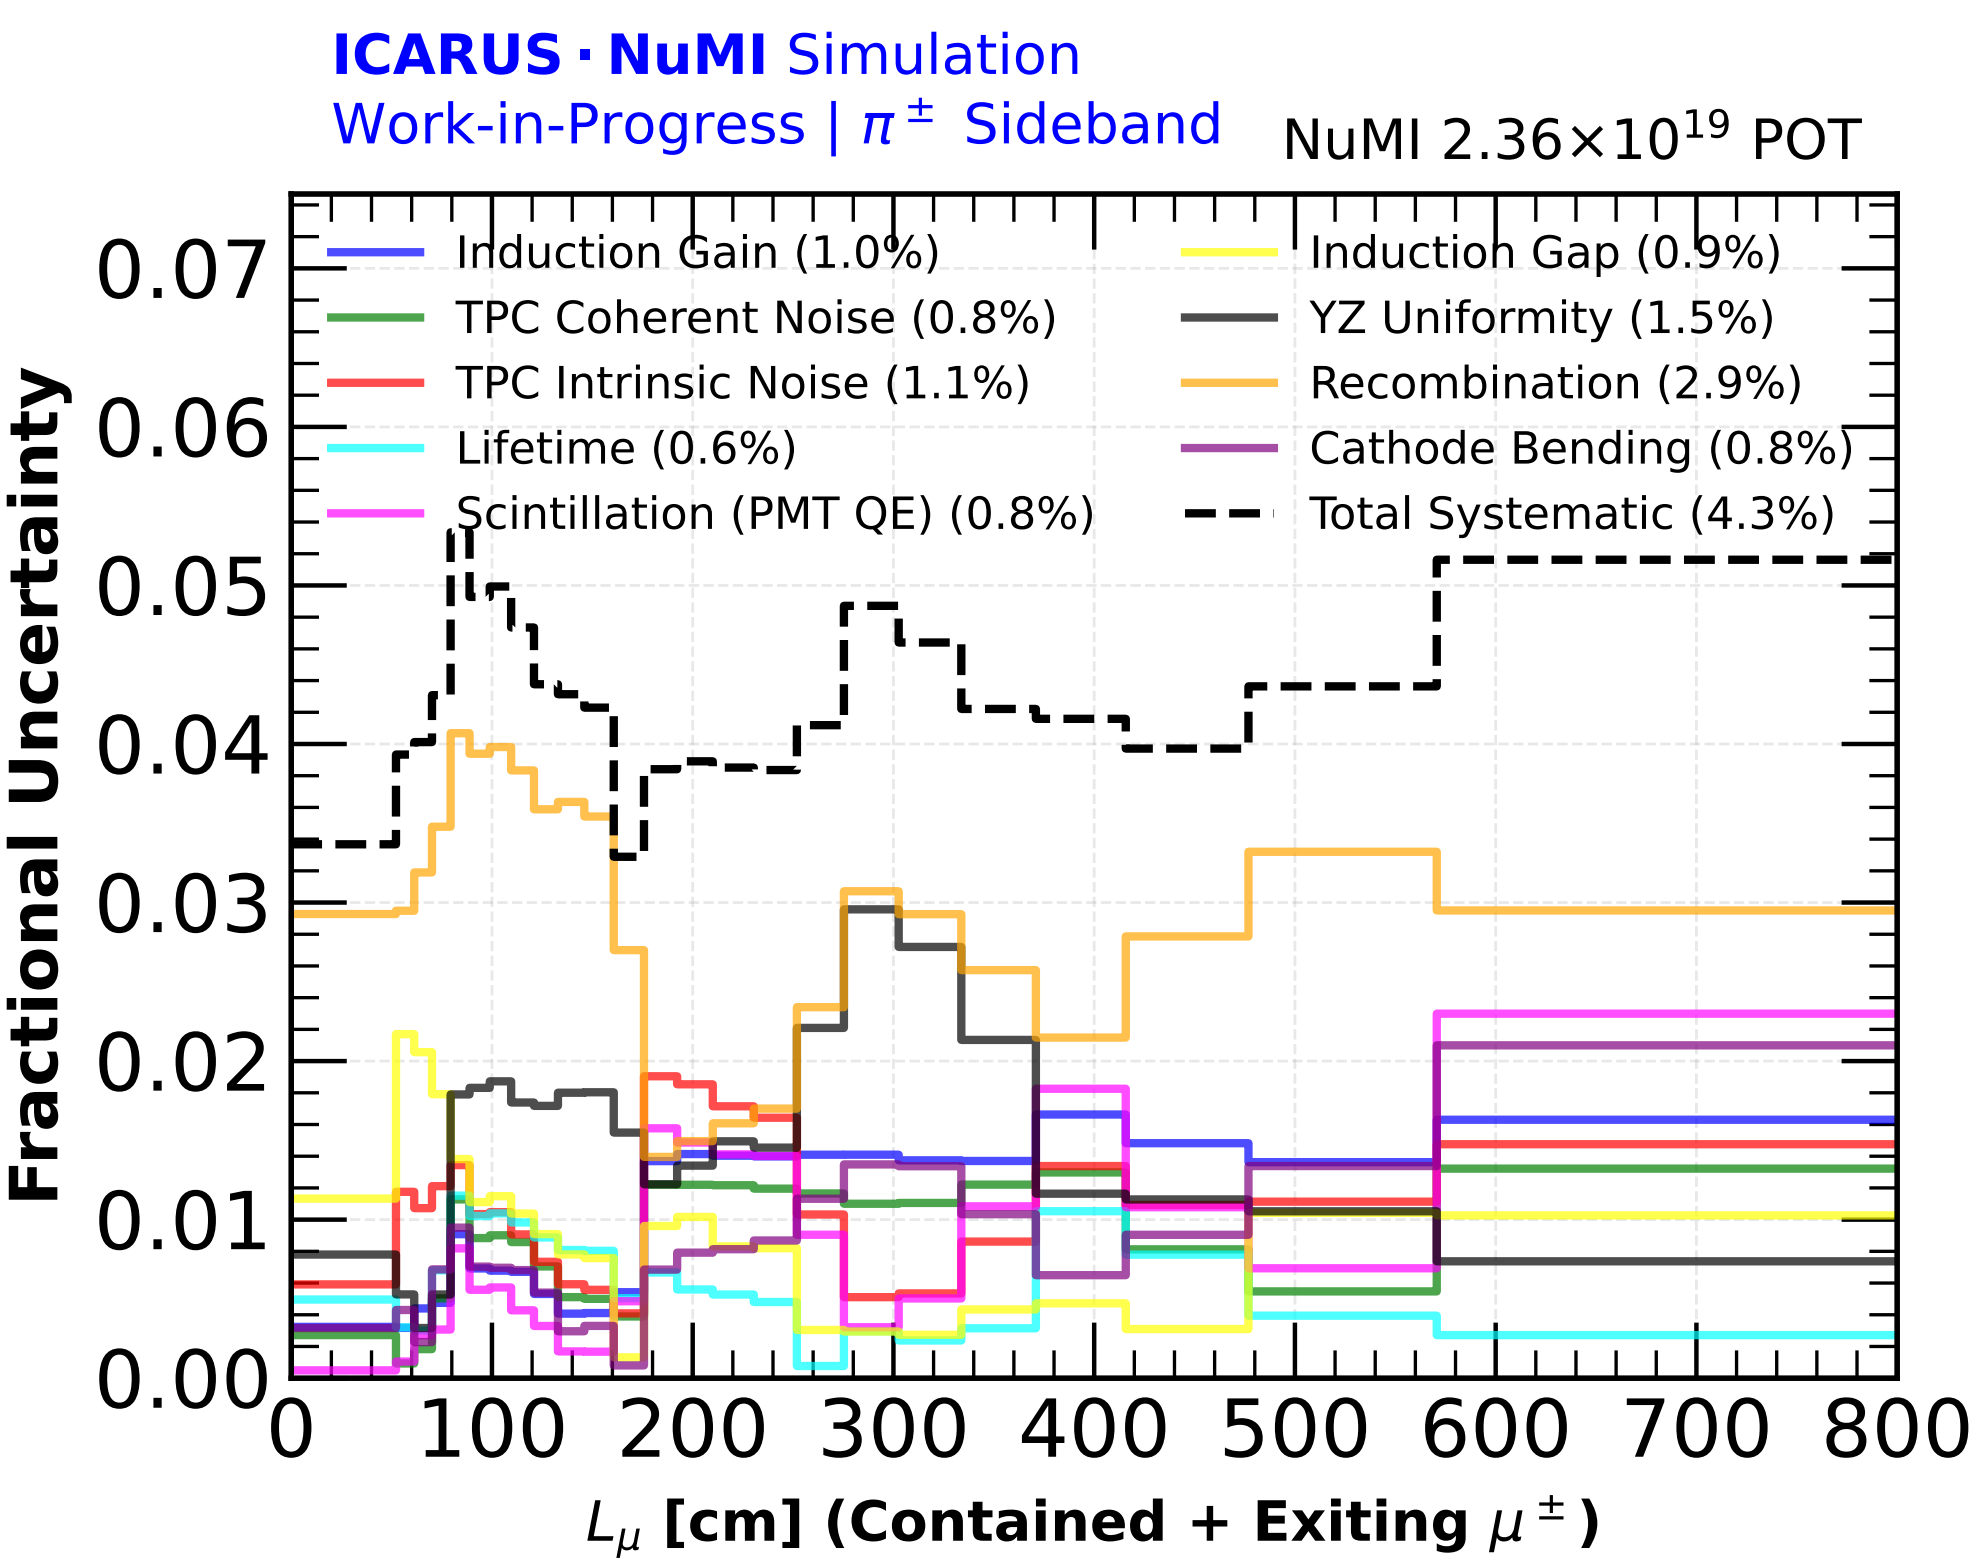
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (1.0%)
TPC Coherent Noise (0.8%)
TPC Intrinsic Noise (1.1%)
Lifetime (0.6%)
Scintillation (PMT QE) (0.8%)
Induction Gap (0.9%)
YZ Uniformity (1.5%)
Recombination (2.9%)
Cathode Bending (0.8%)
Total Systematic (4.3%)
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0
100
200
300
400
500
600
700
800
L_μ [cm] (Contained + Exiting $\mu^{\pm}$)