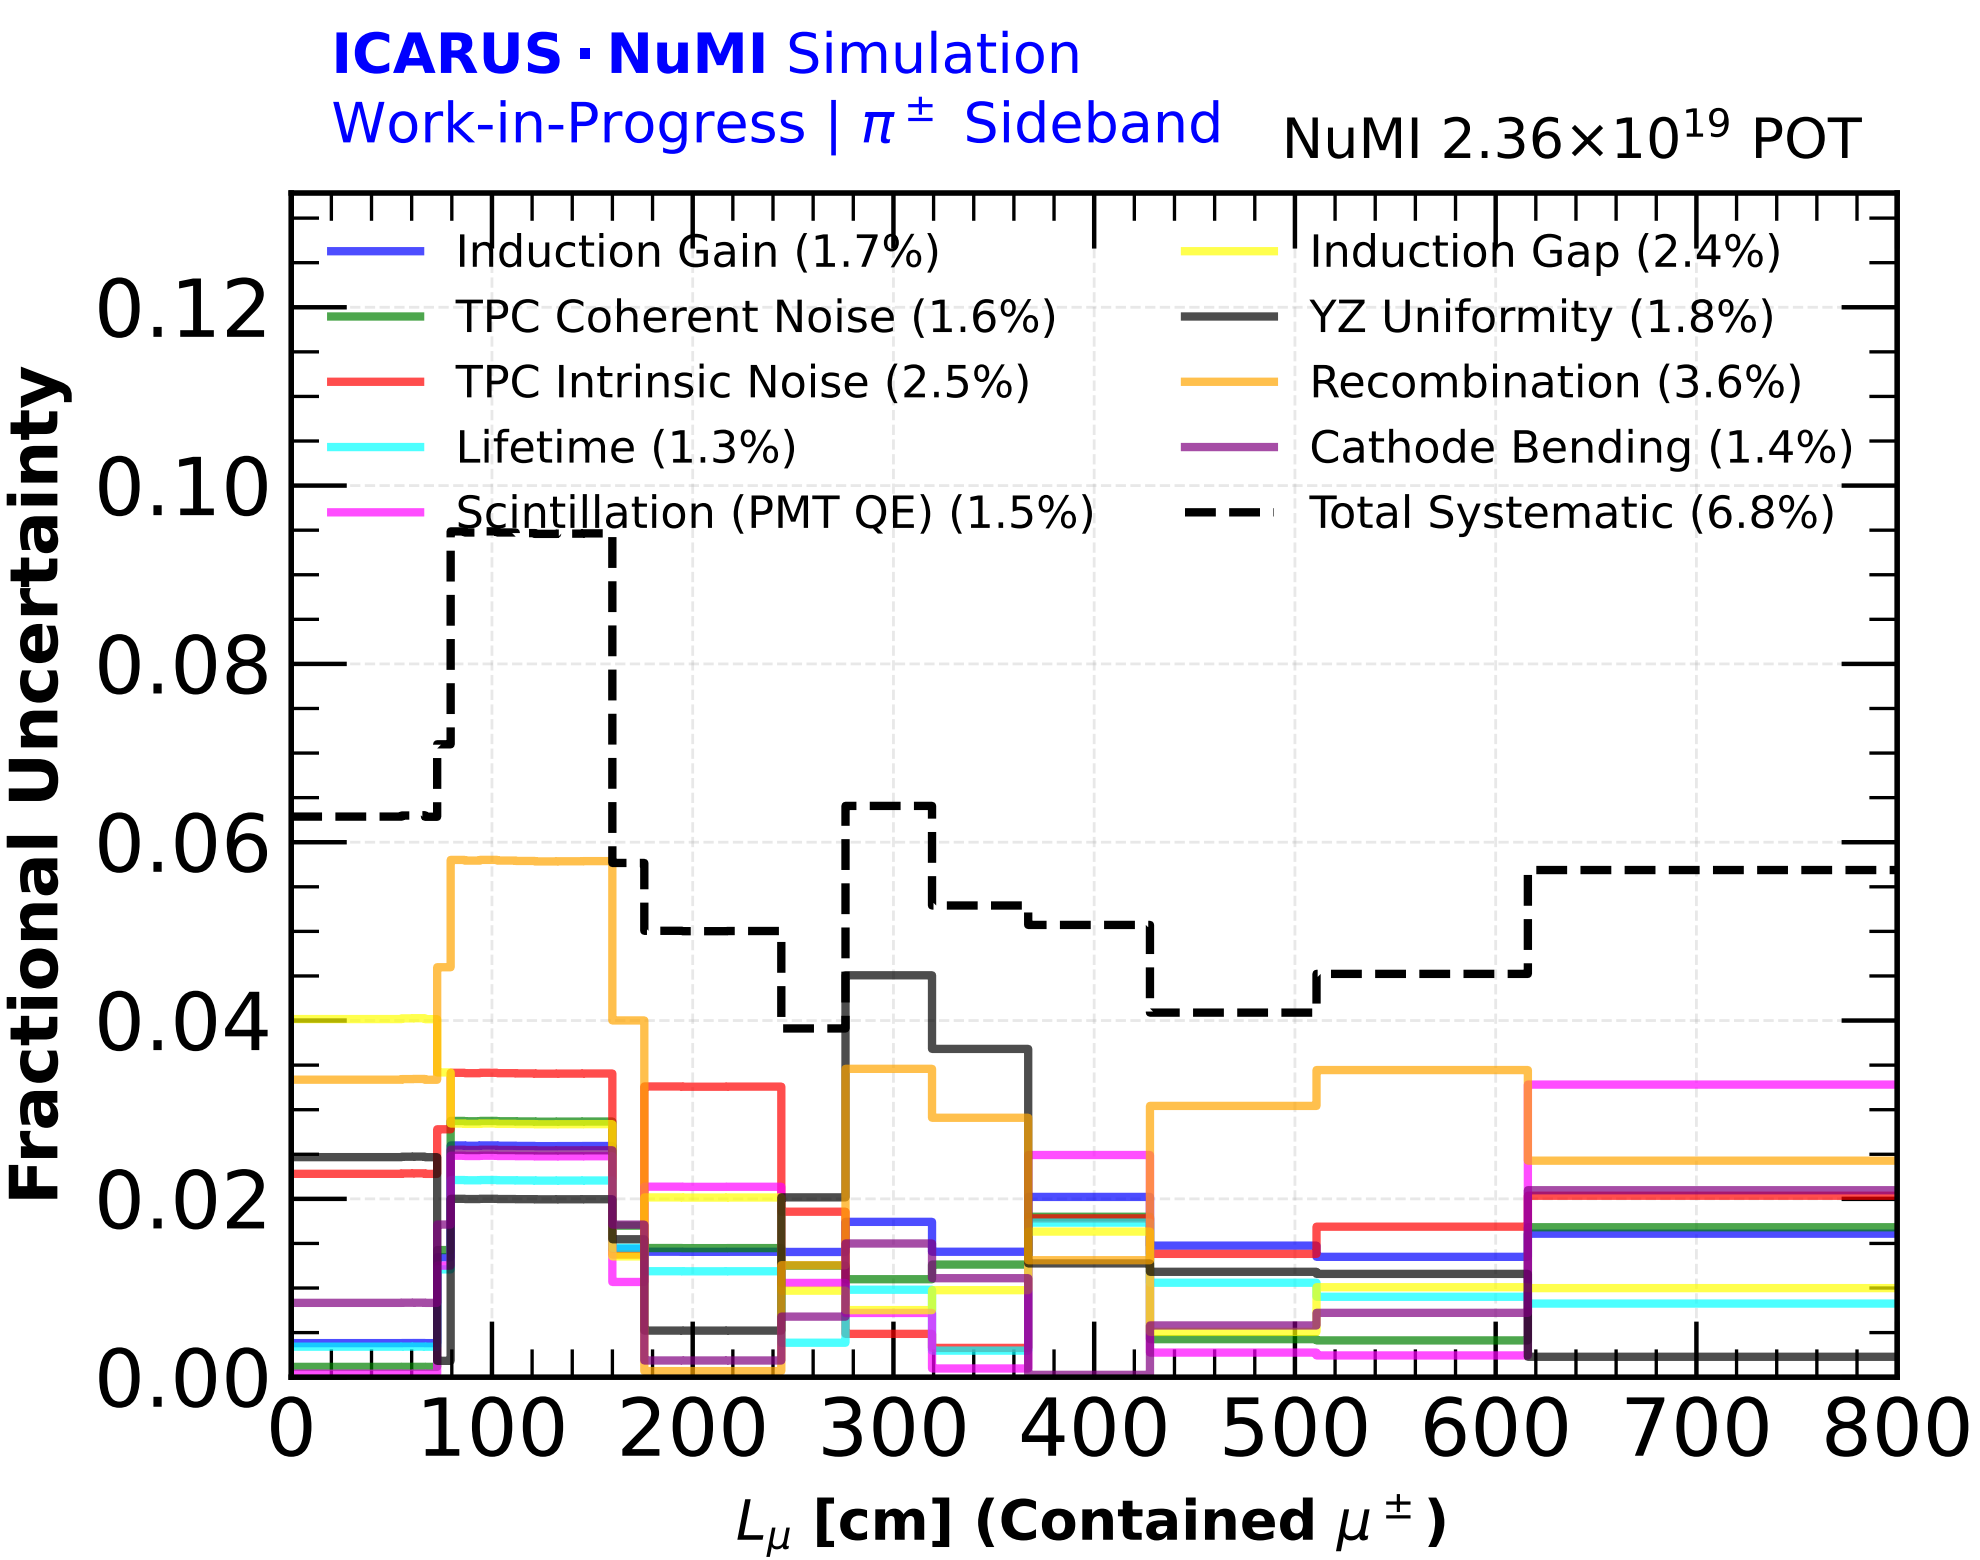
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (1.7%)
TPC Coherent Noise (1.6%)
TPC Intrinsic Noise (2.5%)
Lifetime (1.3%)
Scintillation (PMT QE) (1.5%)
Induction Gap (2.4%)
YZ Uniformity (1.8%)
Recombination (3.6%)
Cathode Bending (1.4%)
Total Systematic (6.8%)
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0
100
200
300
400
500
600
700
800
L_μ [cm] (Contained $\mu^\pm$)