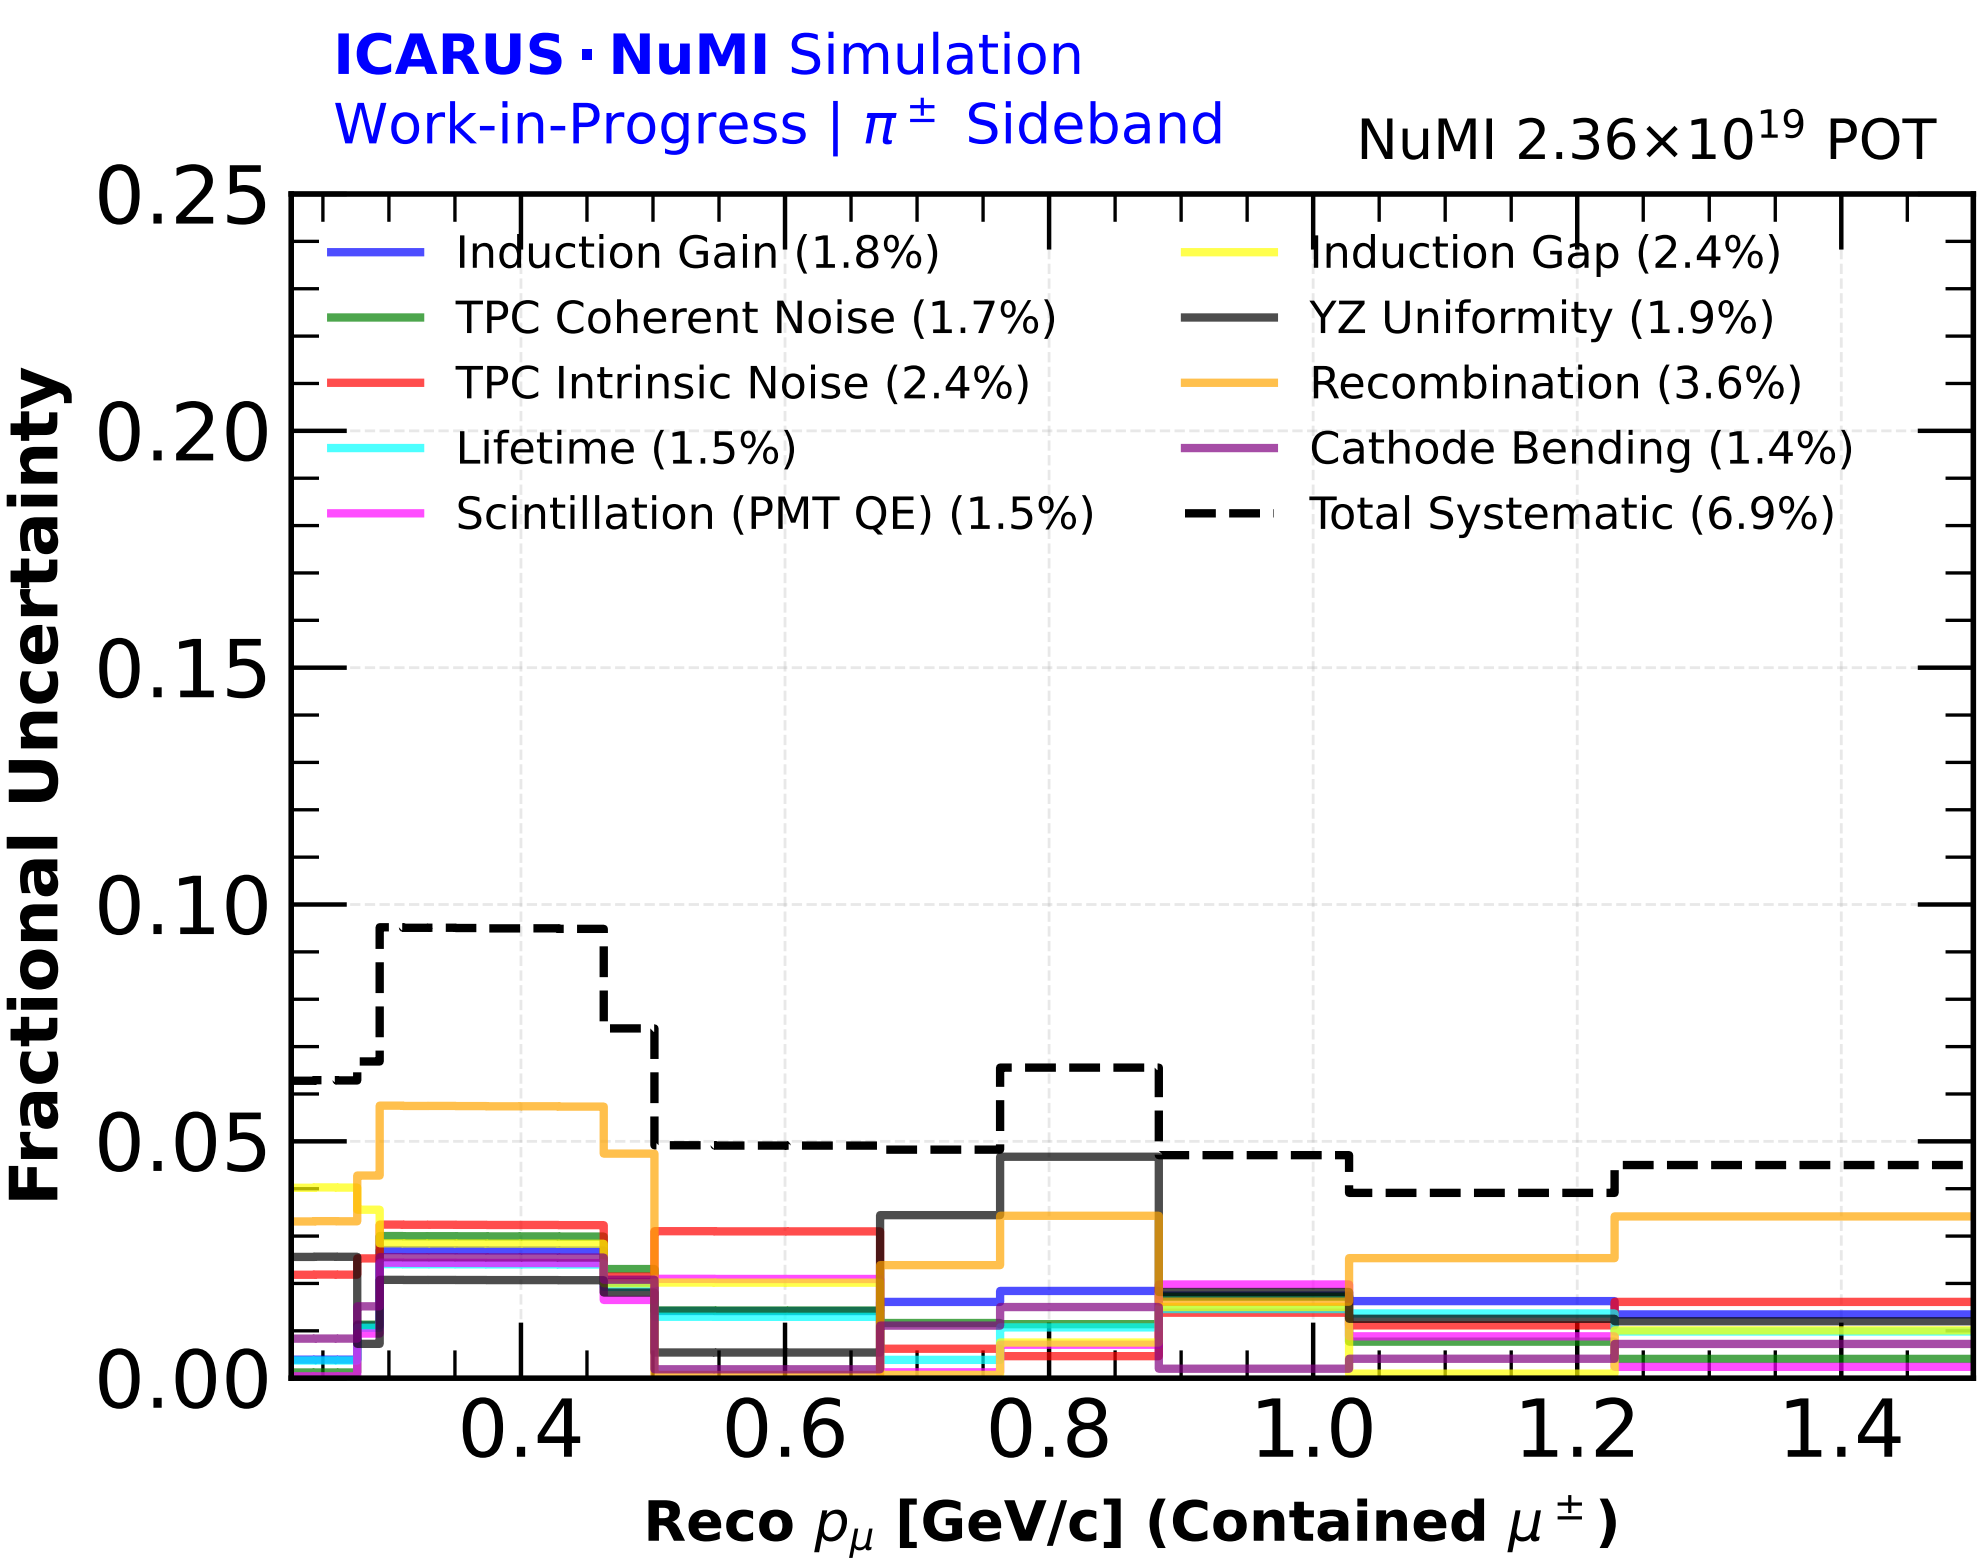
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (1.8%)
TPC Coherent Noise (1.7%)
TPC Intrinsic Noise (2.4%)
Lifetime (1.5%)
Scintillation (PMT QE) (1.5%)
Induction Gap (2.4%)
YZ Uniformity (1.9%)
Recombination (3.6%)
Cathode Bending (1.4%)
Total Systematic (6.9%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0.4
0.6
0.8
1.0
1.2
1.4
Reco p_μ [GeV/c] (Contained $\mu^\pm$)