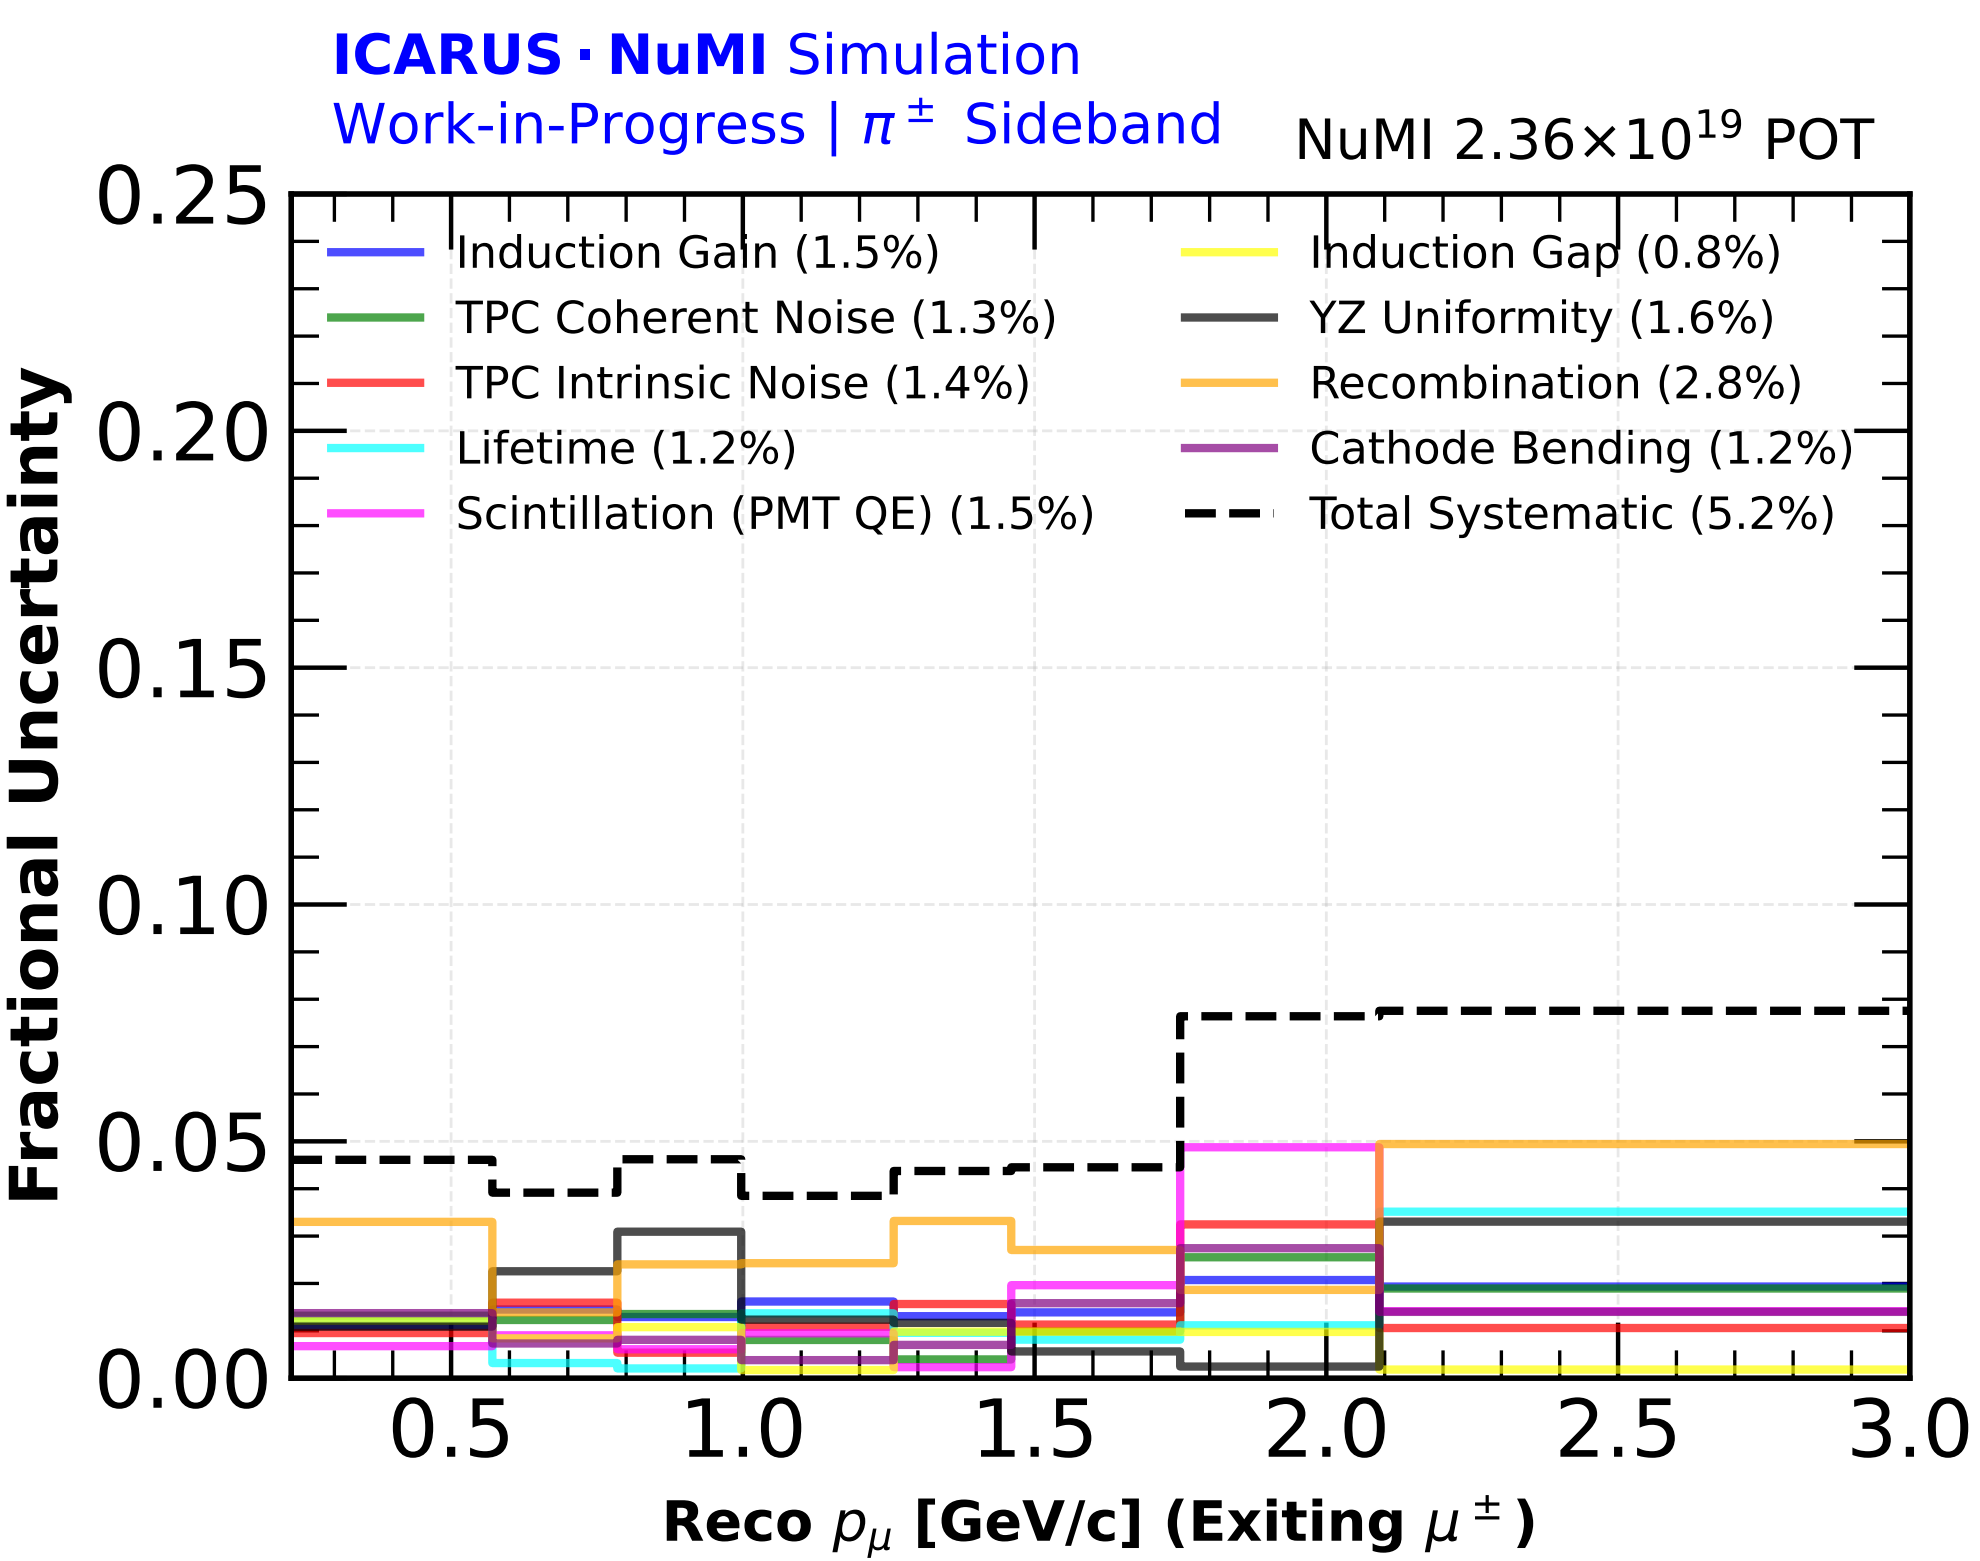
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (1.5%)
TPC Coherent Noise (1.3%)
TPC Intrinsic Noise (1.4%)
Lifetime (1.2%)
Scintillation (PMT QE) (1.5%)
Induction Gap (0.8%)
YZ Uniformity (1.6%)
Recombination (2.8%)
Cathode Bending (1.2%)
Total Systematic (5.2%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0.5
1.0
1.5
2.0
2.5
3.0
Reco p_{μ} [GeV/c] (Exiting $\mu^{\pm}$)