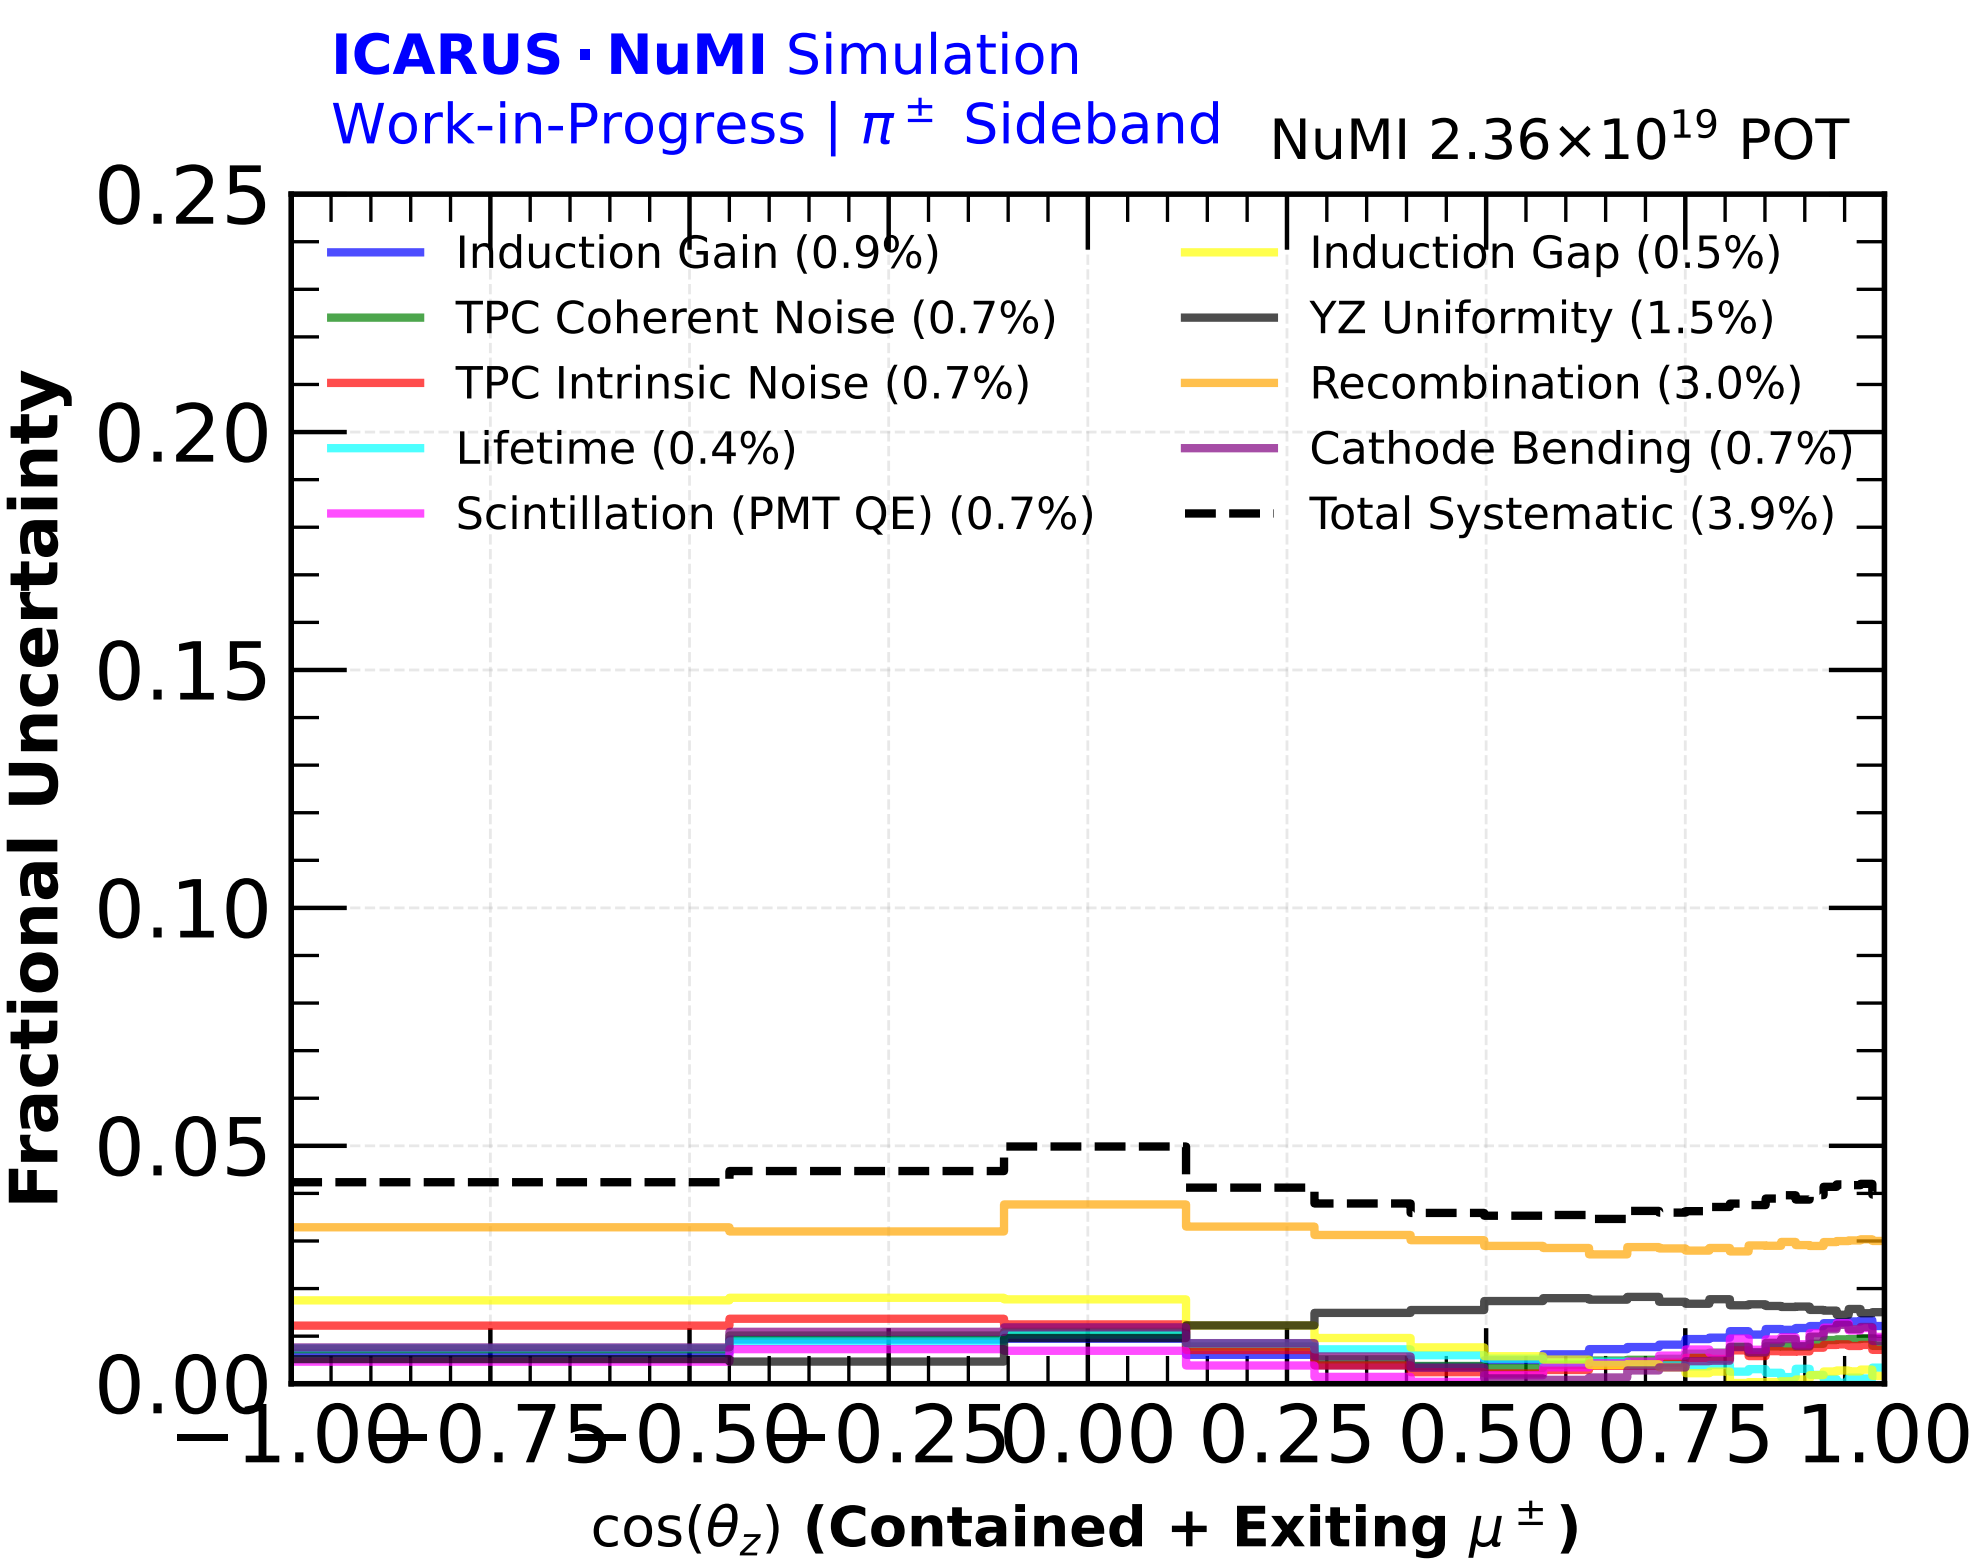
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (0.9%)
TPC Coherent Noise (0.7%)
TPC Intrinsic Noise (0.7%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.7%)
Induction Gap (0.5%)
YZ Uniformity (1.5%)
Recombination (3.0%)
Cathode Bending (0.7%)
Total Systematic (3.9%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
−1.00
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
1.00
cos(θ_z) (Contained + Exiting $\mu^{\pm}$)