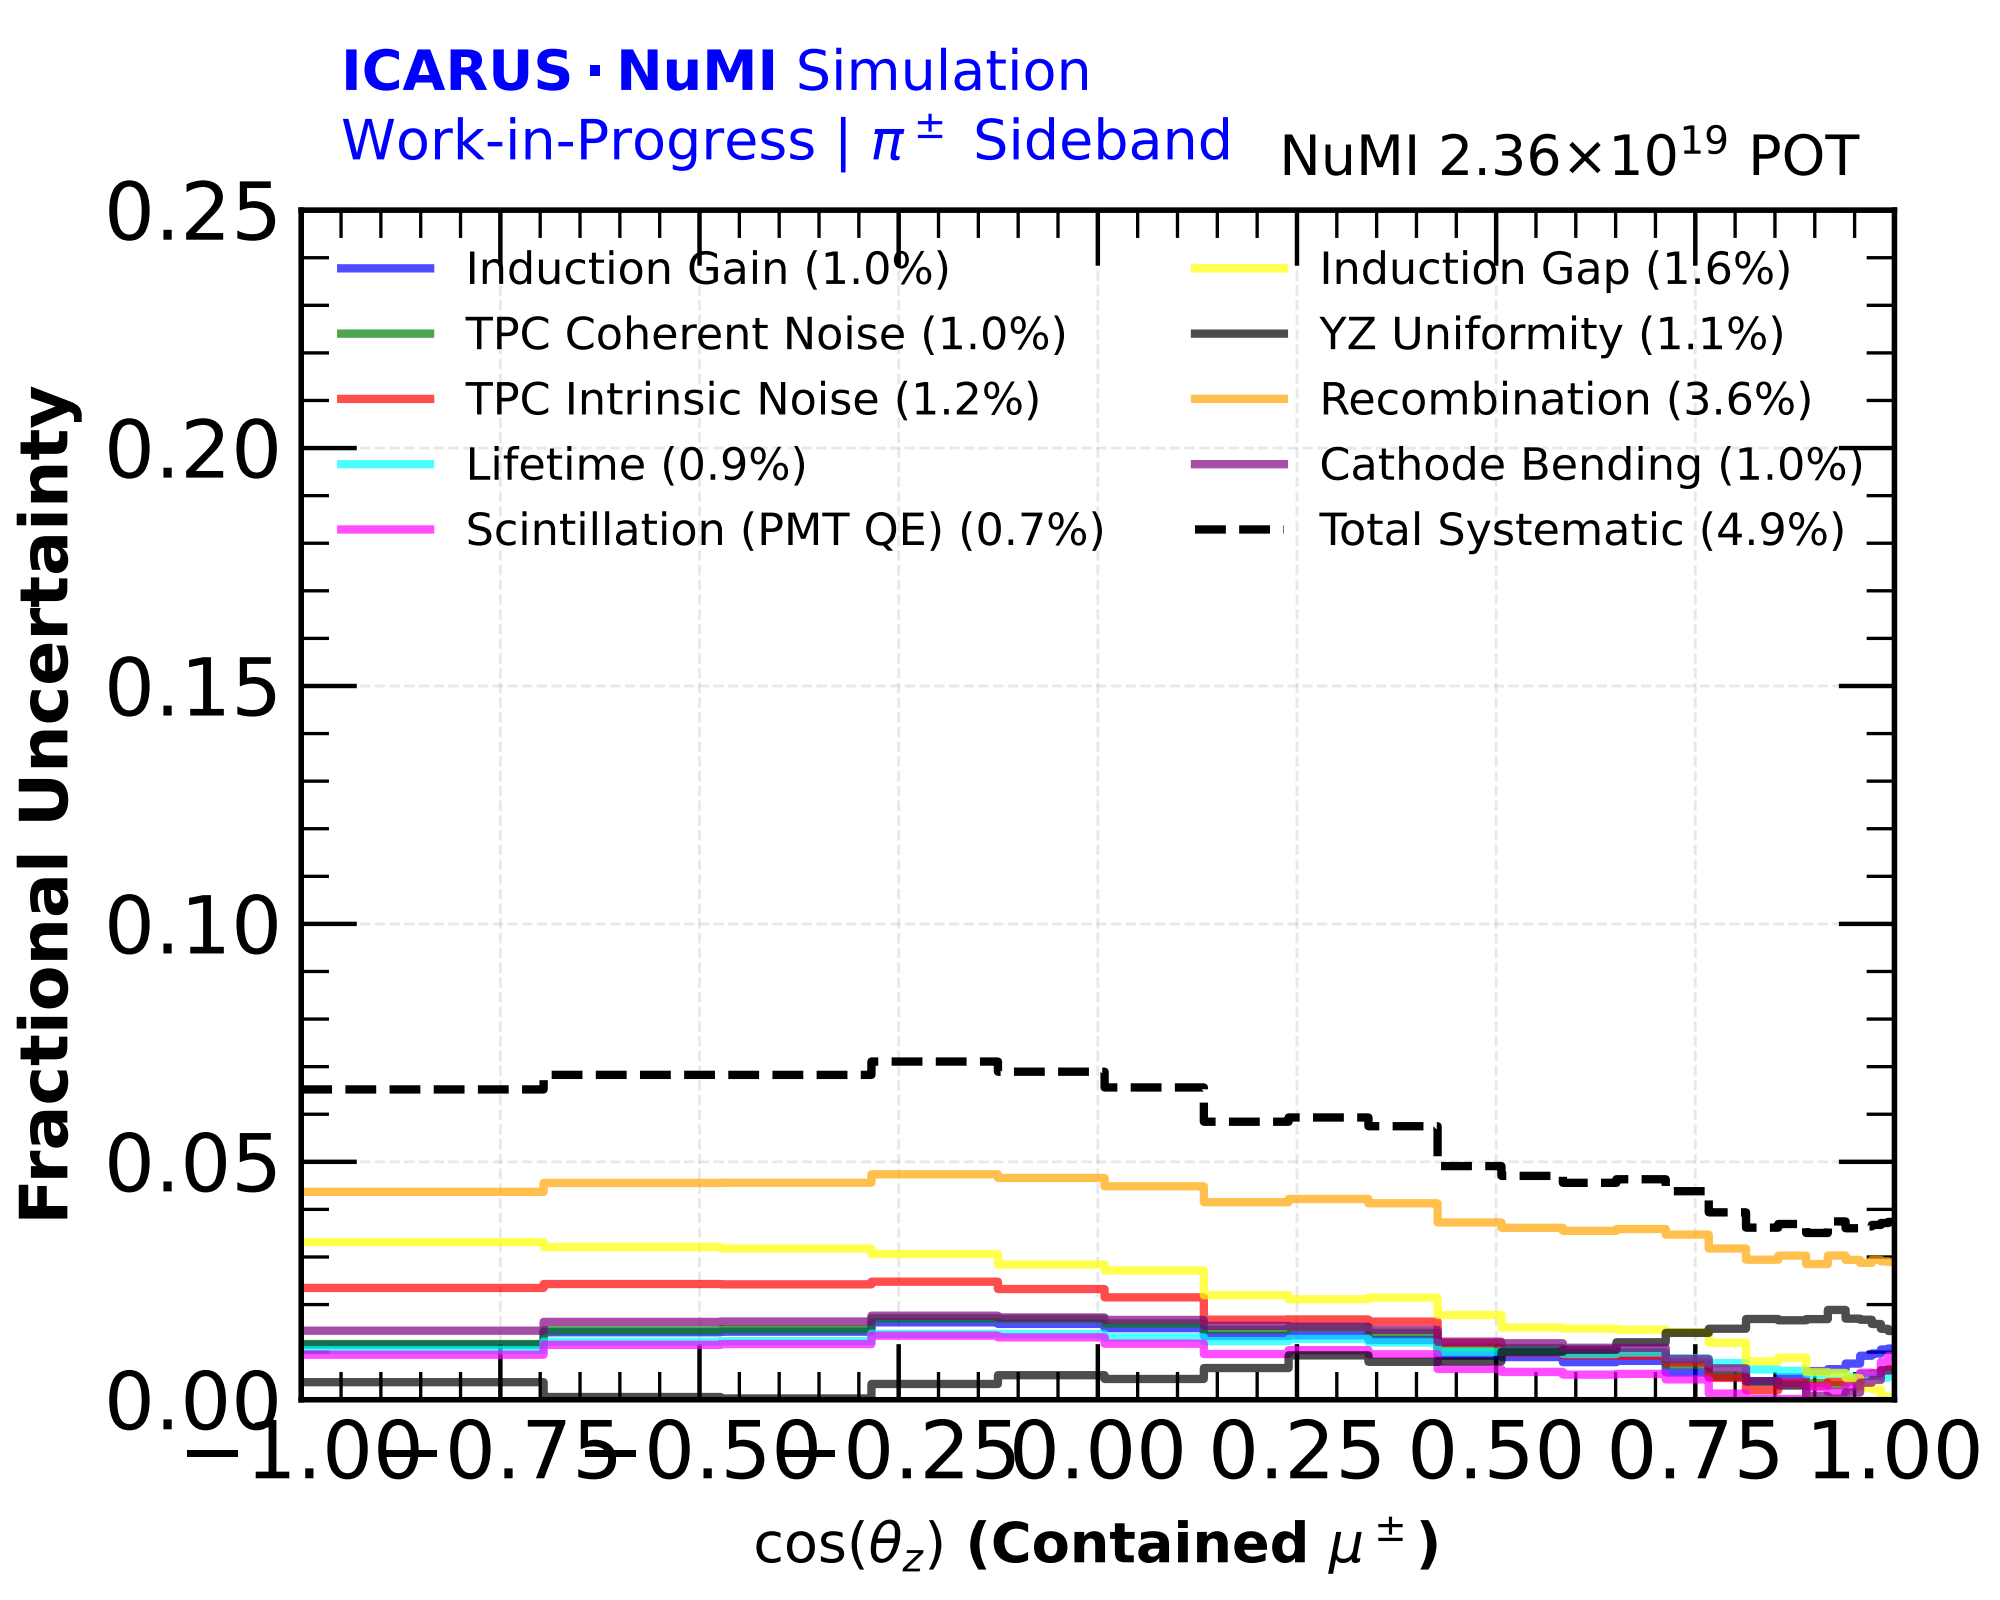
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (1.0%)
TPC Coherent Noise (1.0%)
TPC Intrinsic Noise (1.2%)
Lifetime (0.9%)
Scintillation (PMT QE) (0.7%)
Induction Gap (1.6%)
YZ Uniformity (1.1%)
Recombination (3.6%)
Cathode Bending (1.0%)
Total Systematic (4.9%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
−1.00
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
1.00
cos(θ_z) **(Contained $\mu^{\pm}$)**