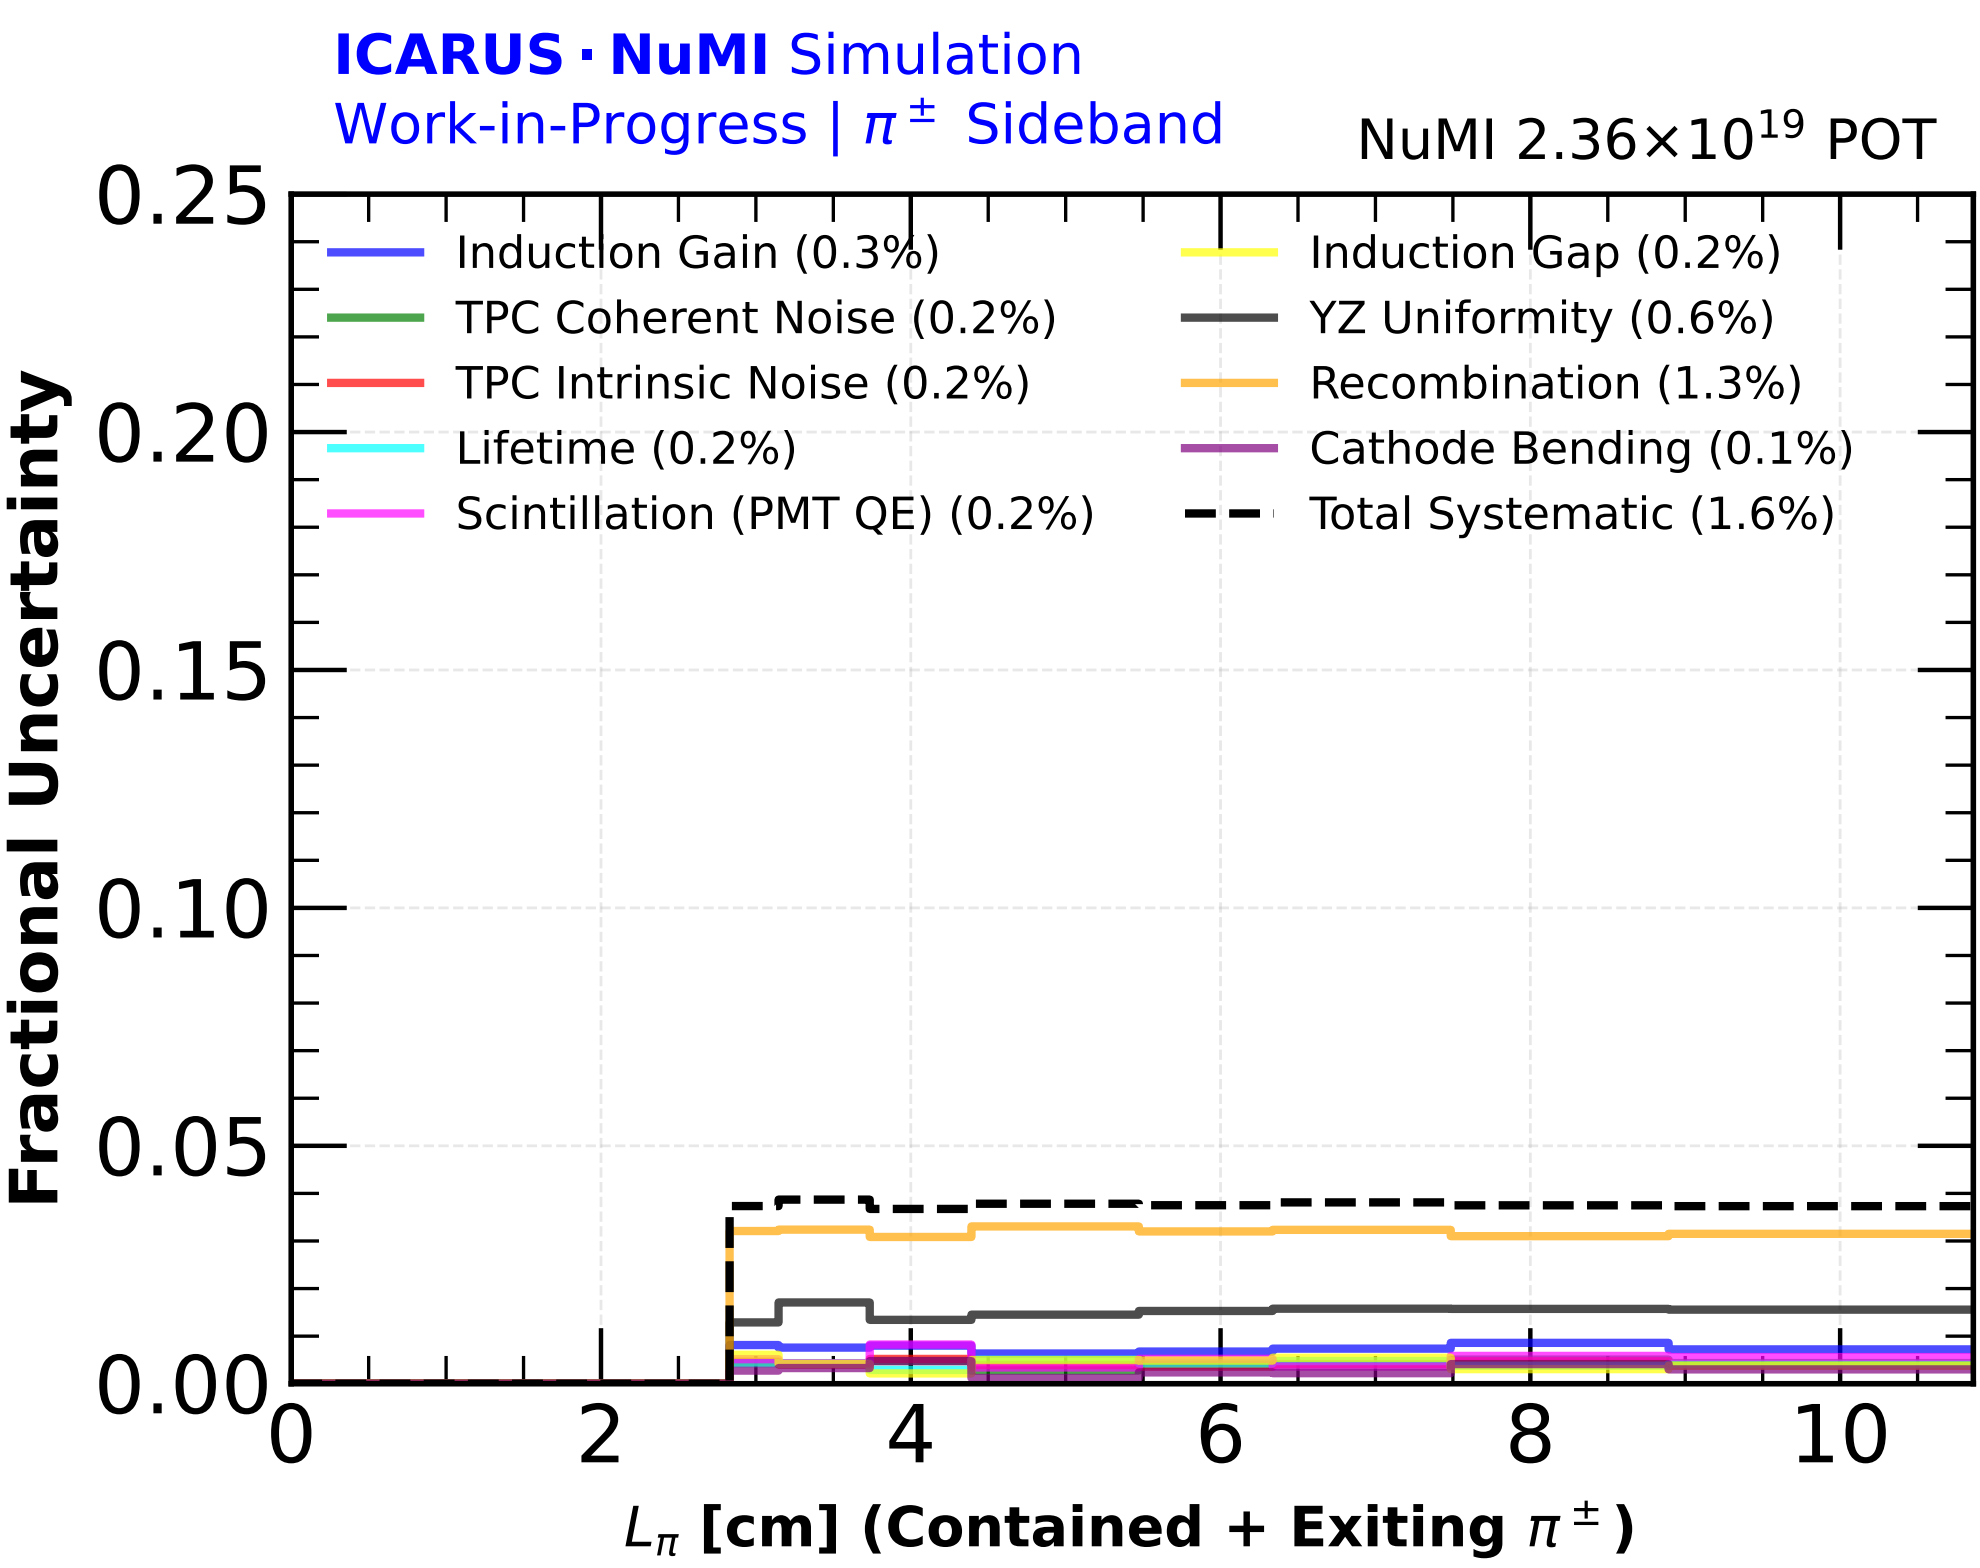
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (0.3%)
TPC Coherent Noise (0.2%)
TPC Intrinsic Noise (0.2%)
Lifetime (0.2%)
Scintillation (PMT QE) (0.2%)
Induction Gap (0.2%)
YZ Uniformity (0.6%)
Recombination (1.3%)
Cathode Bending (0.1%)
Total Systematic (1.6%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
2
4
6
8
10
L_{π} [cm] (Contained + Exiting $\pi^{\pm}$)