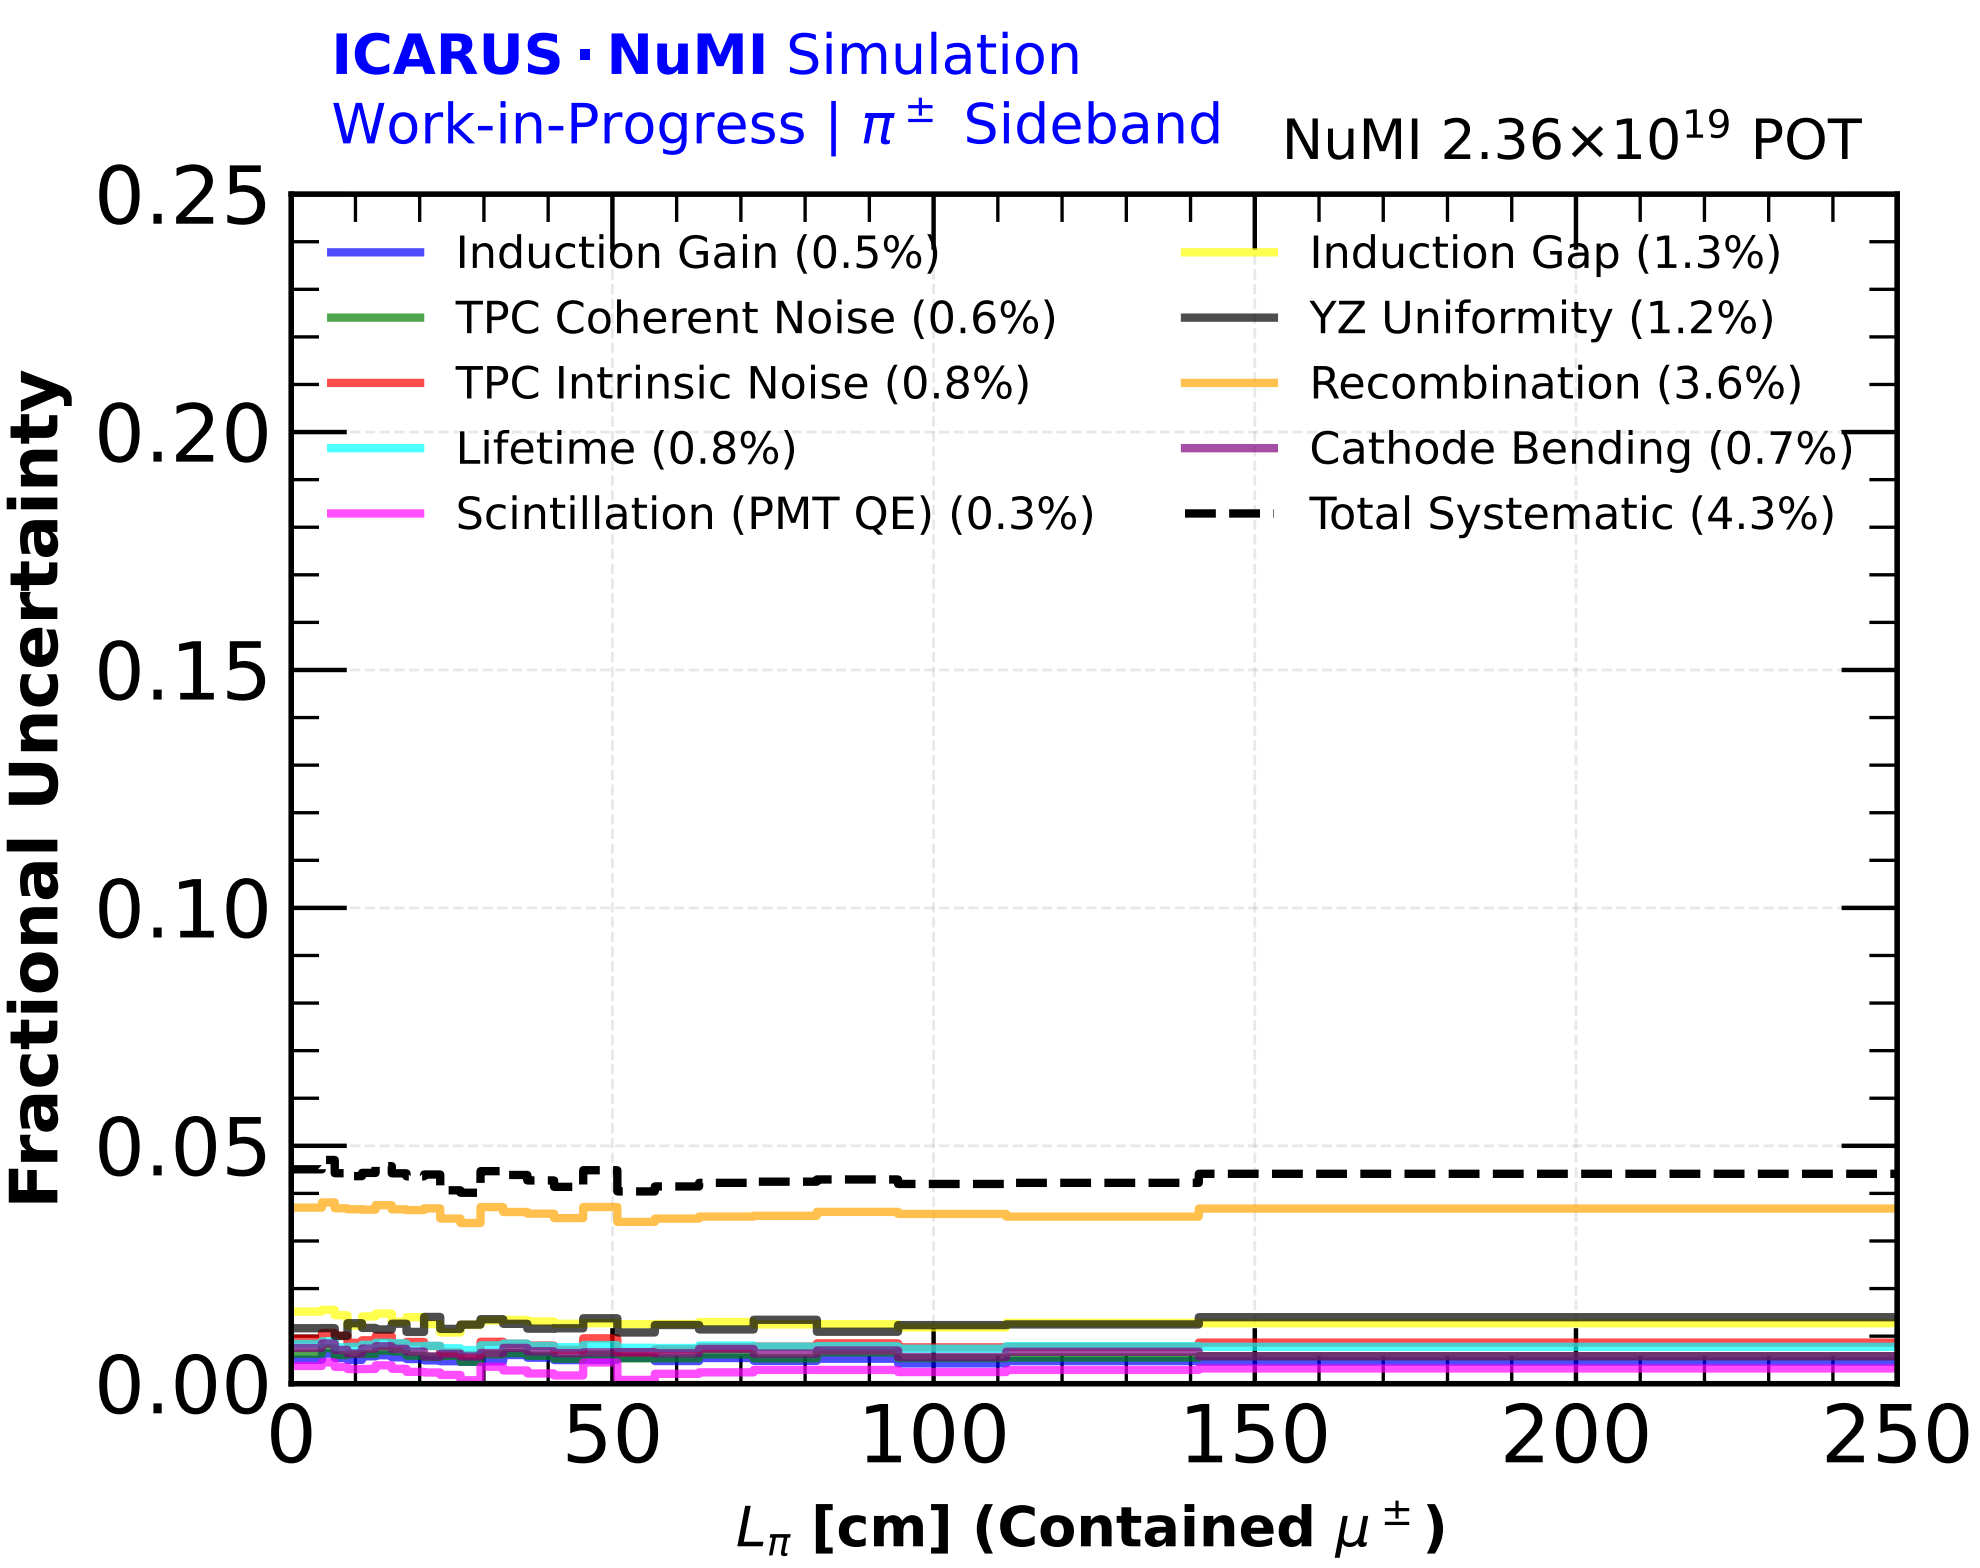
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (0.5%)
TPC Coherent Noise (0.6%)
TPC Intrinsic Noise (0.8%)
Lifetime (0.8%)
Scintillation (PMT QE) (0.3%)
Induction Gap (1.3%)
YZ Uniformity (1.2%)
Recombination (3.6%)
Cathode Bending (0.7%)
Total Systematic (4.3%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
50
100
150
200
250
L_{π} [cm] (Contained $\mu^{\pm}$)