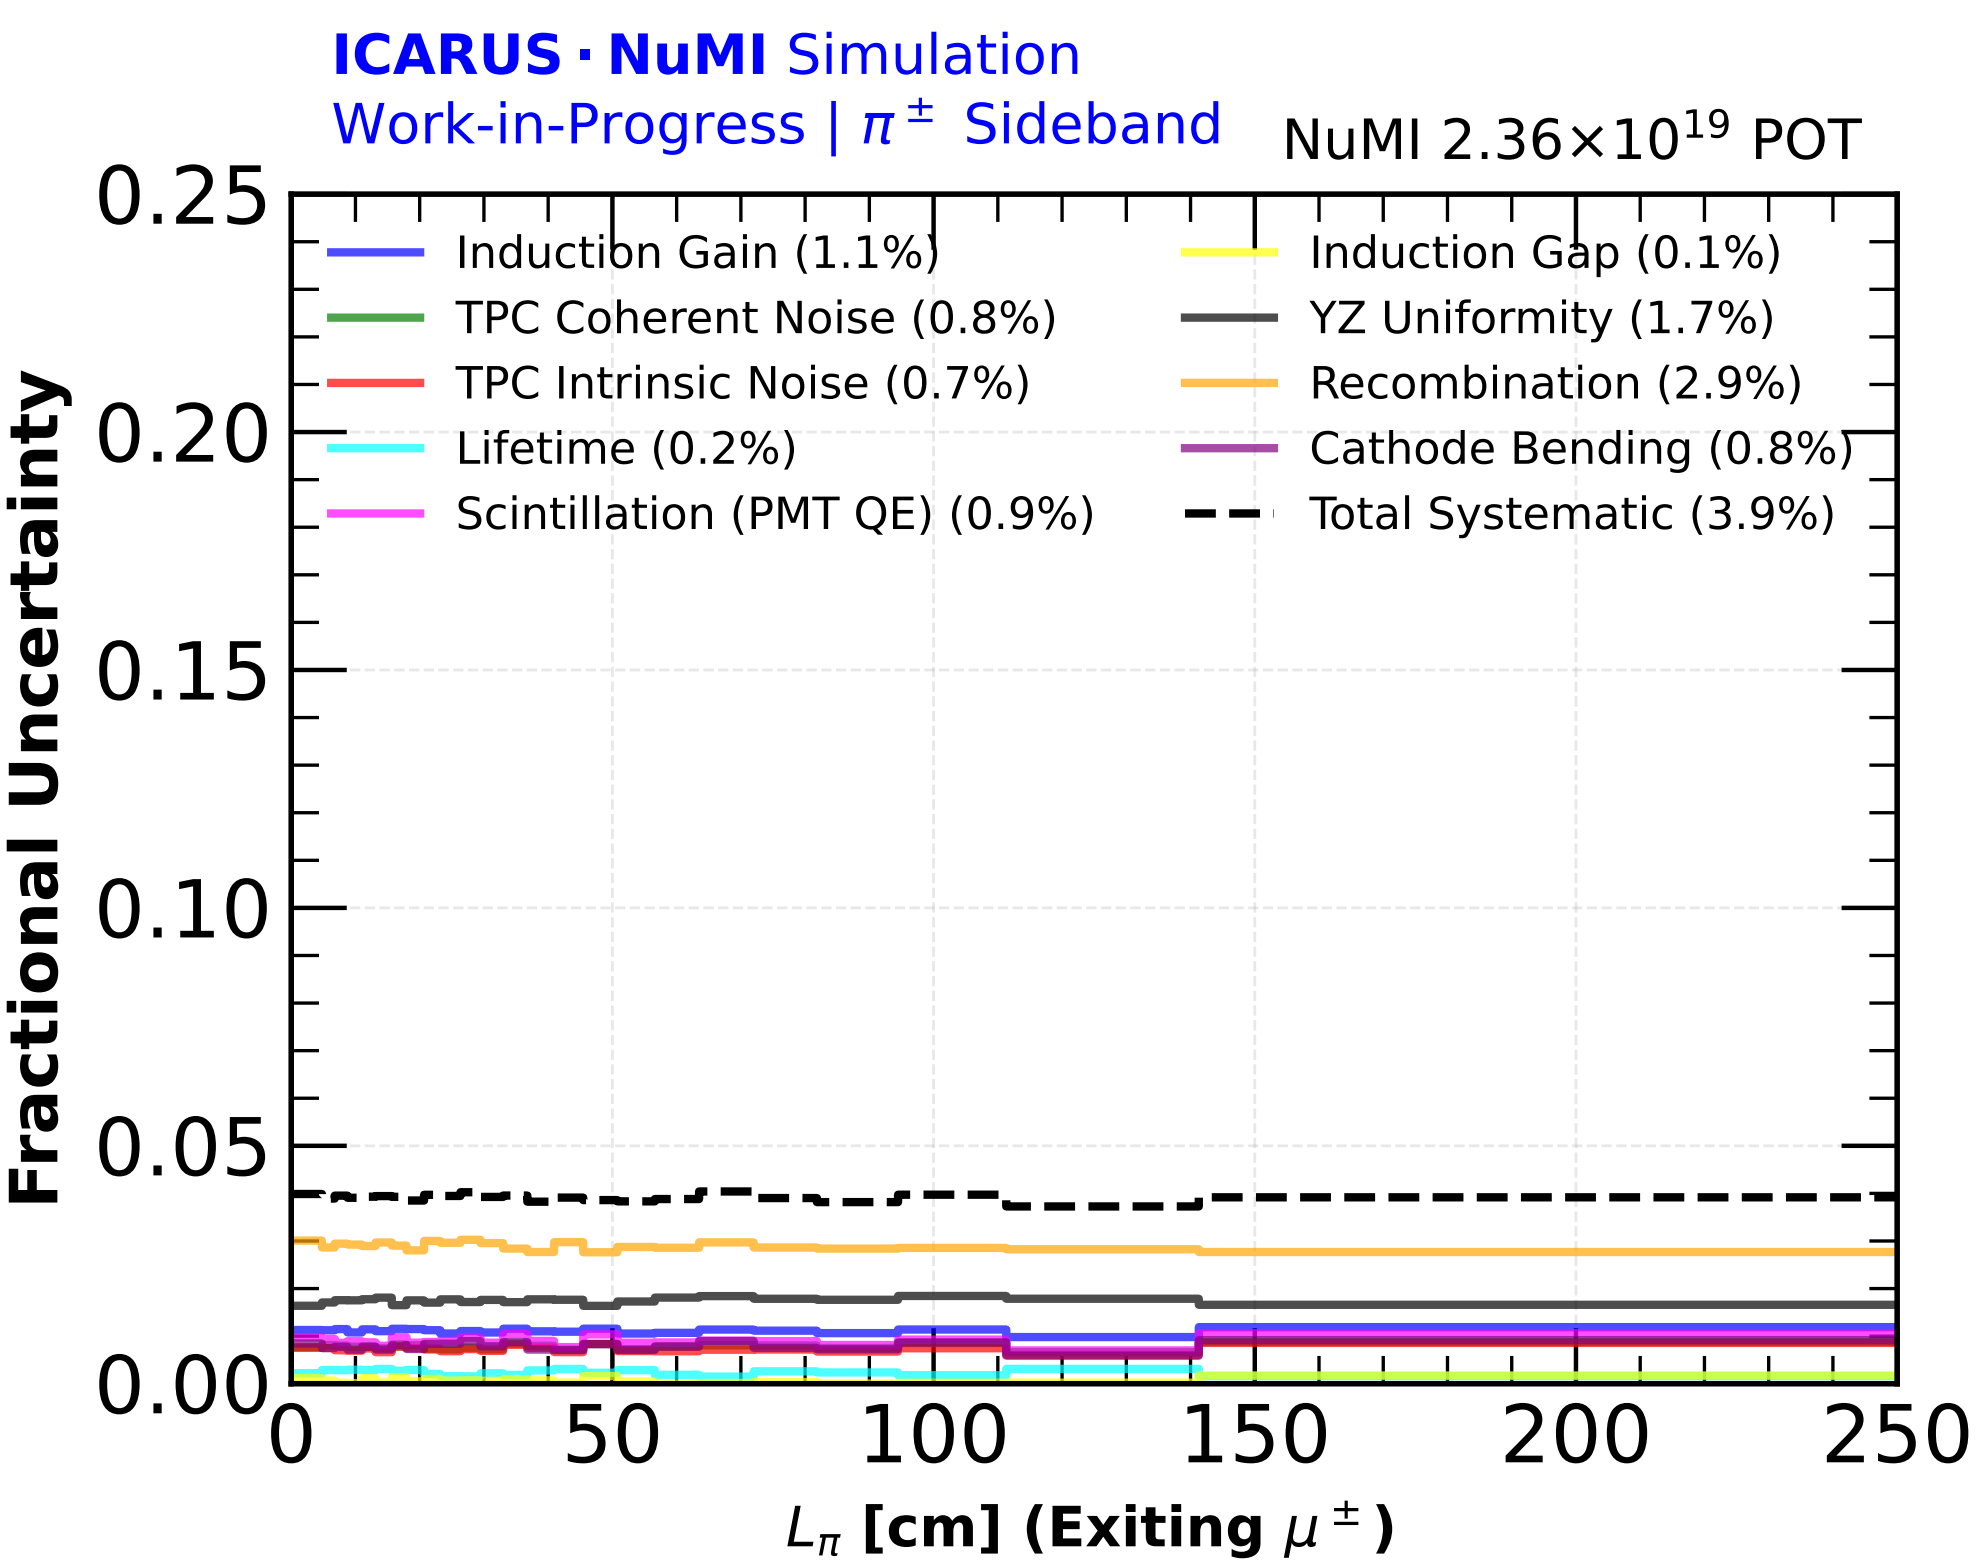
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (1.1%)
TPC Coherent Noise (0.8%)
TPC Intrinsic Noise (0.7%)
Lifetime (0.2%)
Scintillation (PMT QE) (0.9%)
Induction Gap (0.1%)
YZ Uniformity (1.7%)
Recombination (2.9%)
Cathode Bending (0.8%)
Total Systematic (3.9%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
50
100
150
200
250
L_{π} [cm] (Exiting $\mu^{\pm}$)