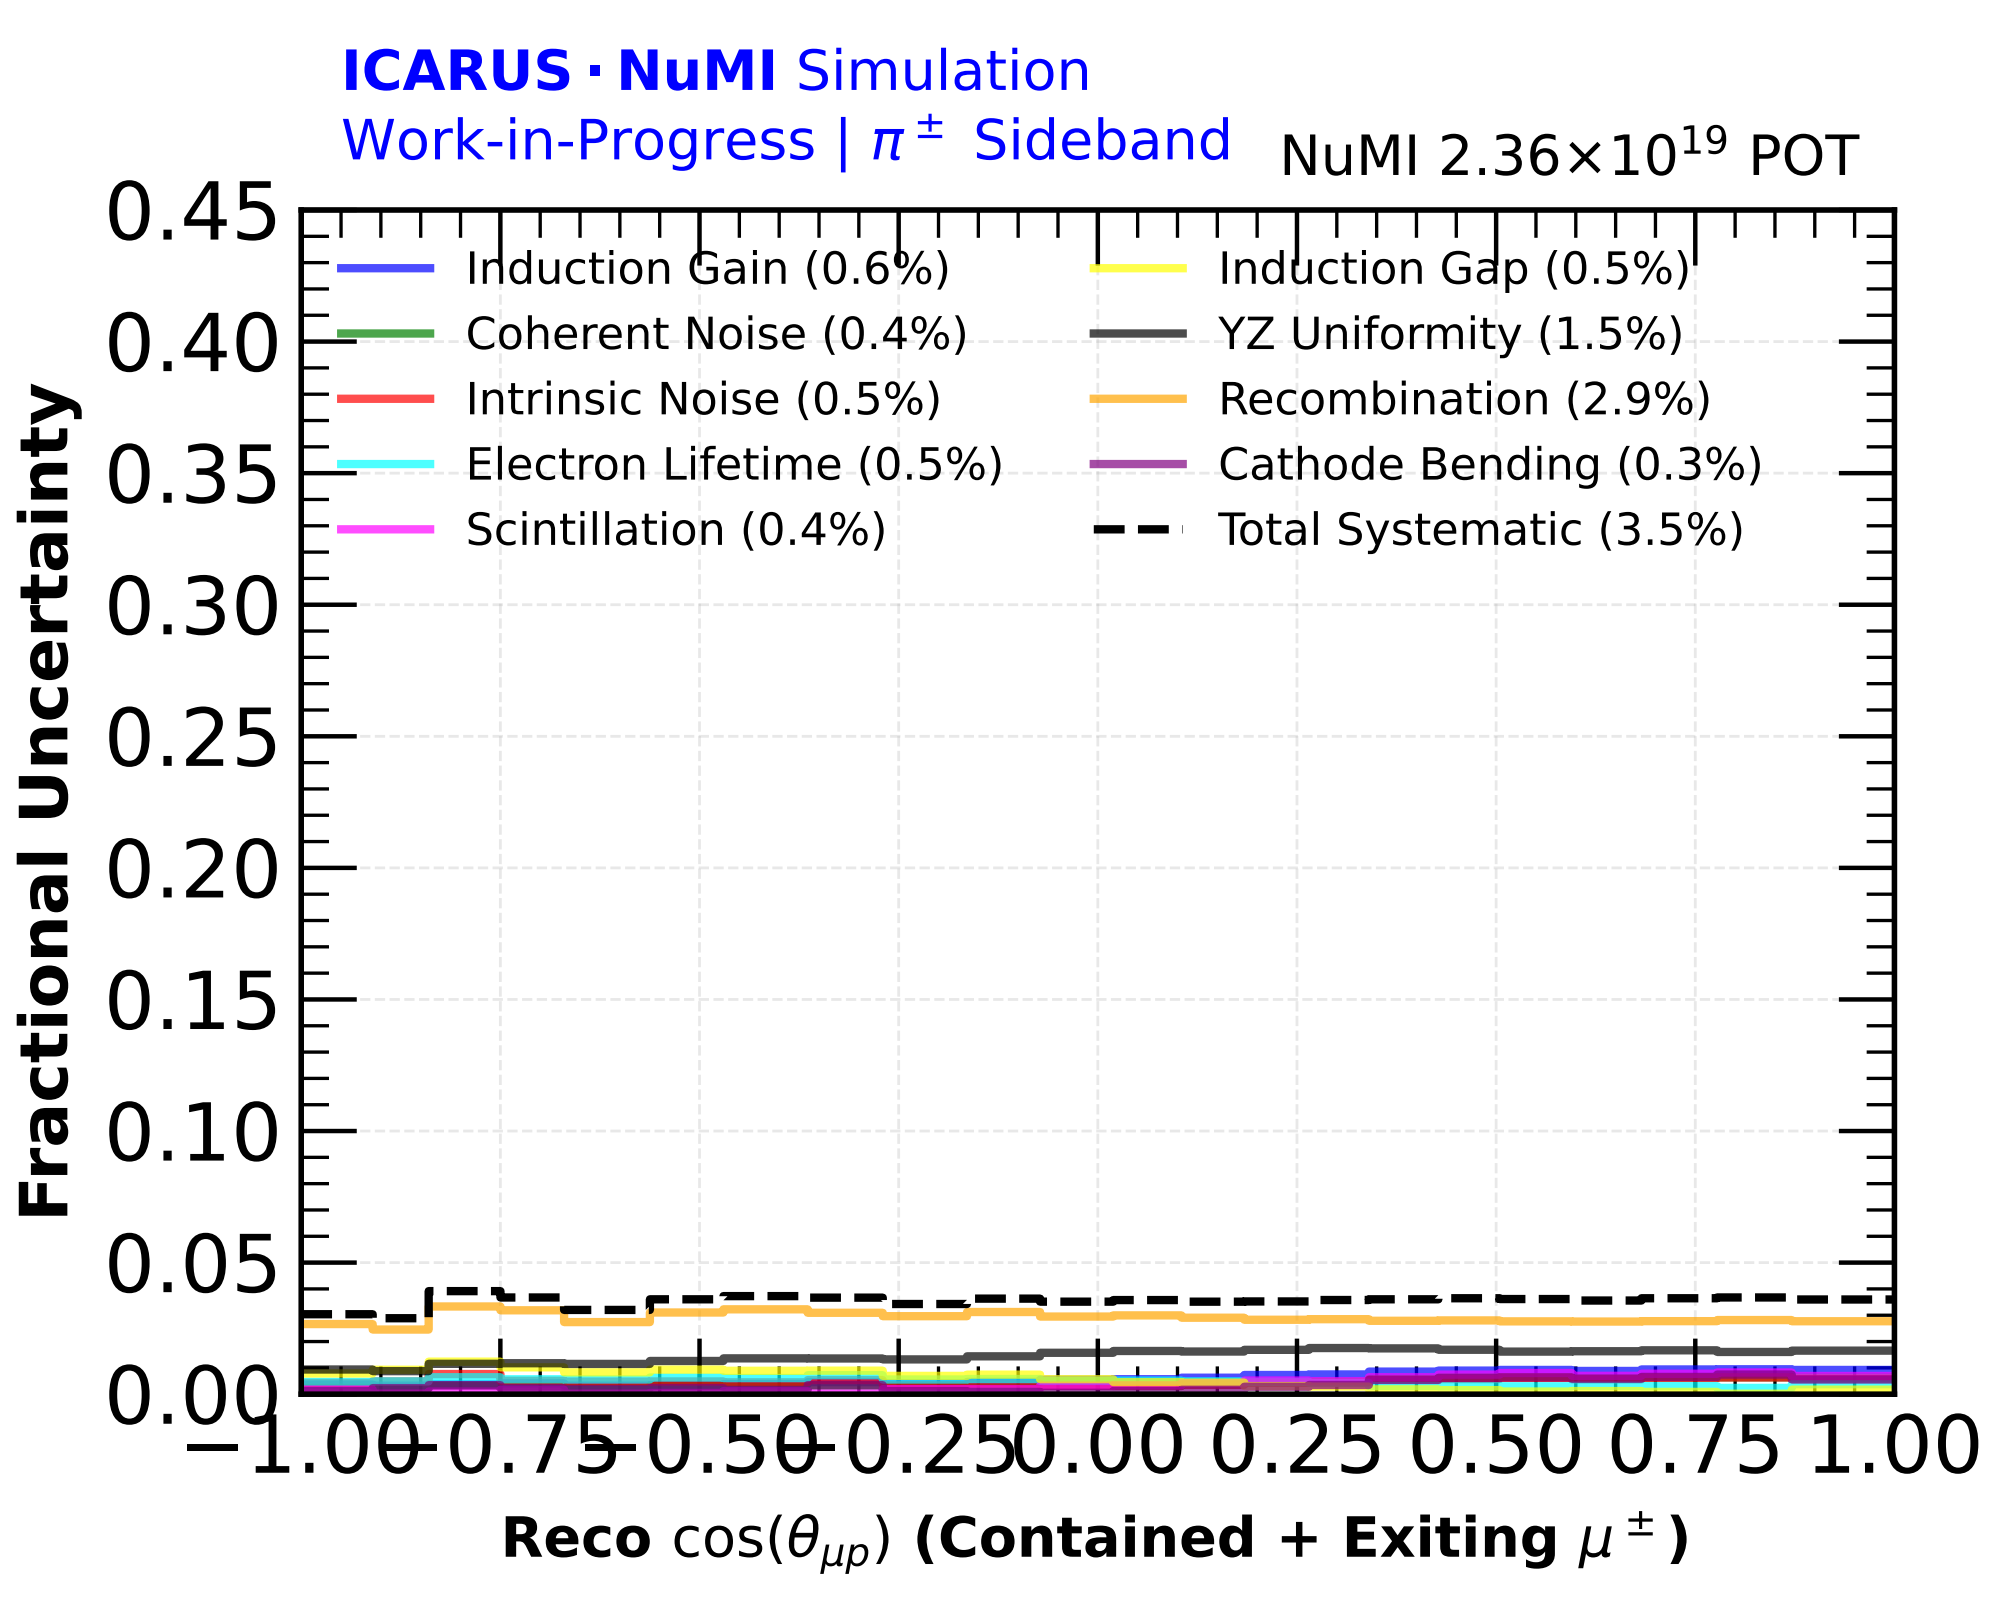
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (0.6%)
Coherent Noise (0.4%)
Intrinsic Noise (0.5%)
Electron Lifetime (0.5%)
Scintillation (0.4%)
Induction Gap (0.5%)
YZ Uniformity (1.5%)
Recombination (2.9%)
Cathode Bending (0.3%)
Total Systematic (3.5%)
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−1.00 −0.75 −0.50 −0.25 0.00 0.25 0.50 0.75 1.00
Reco cos(θμp) (Contained + Exiting μ±)