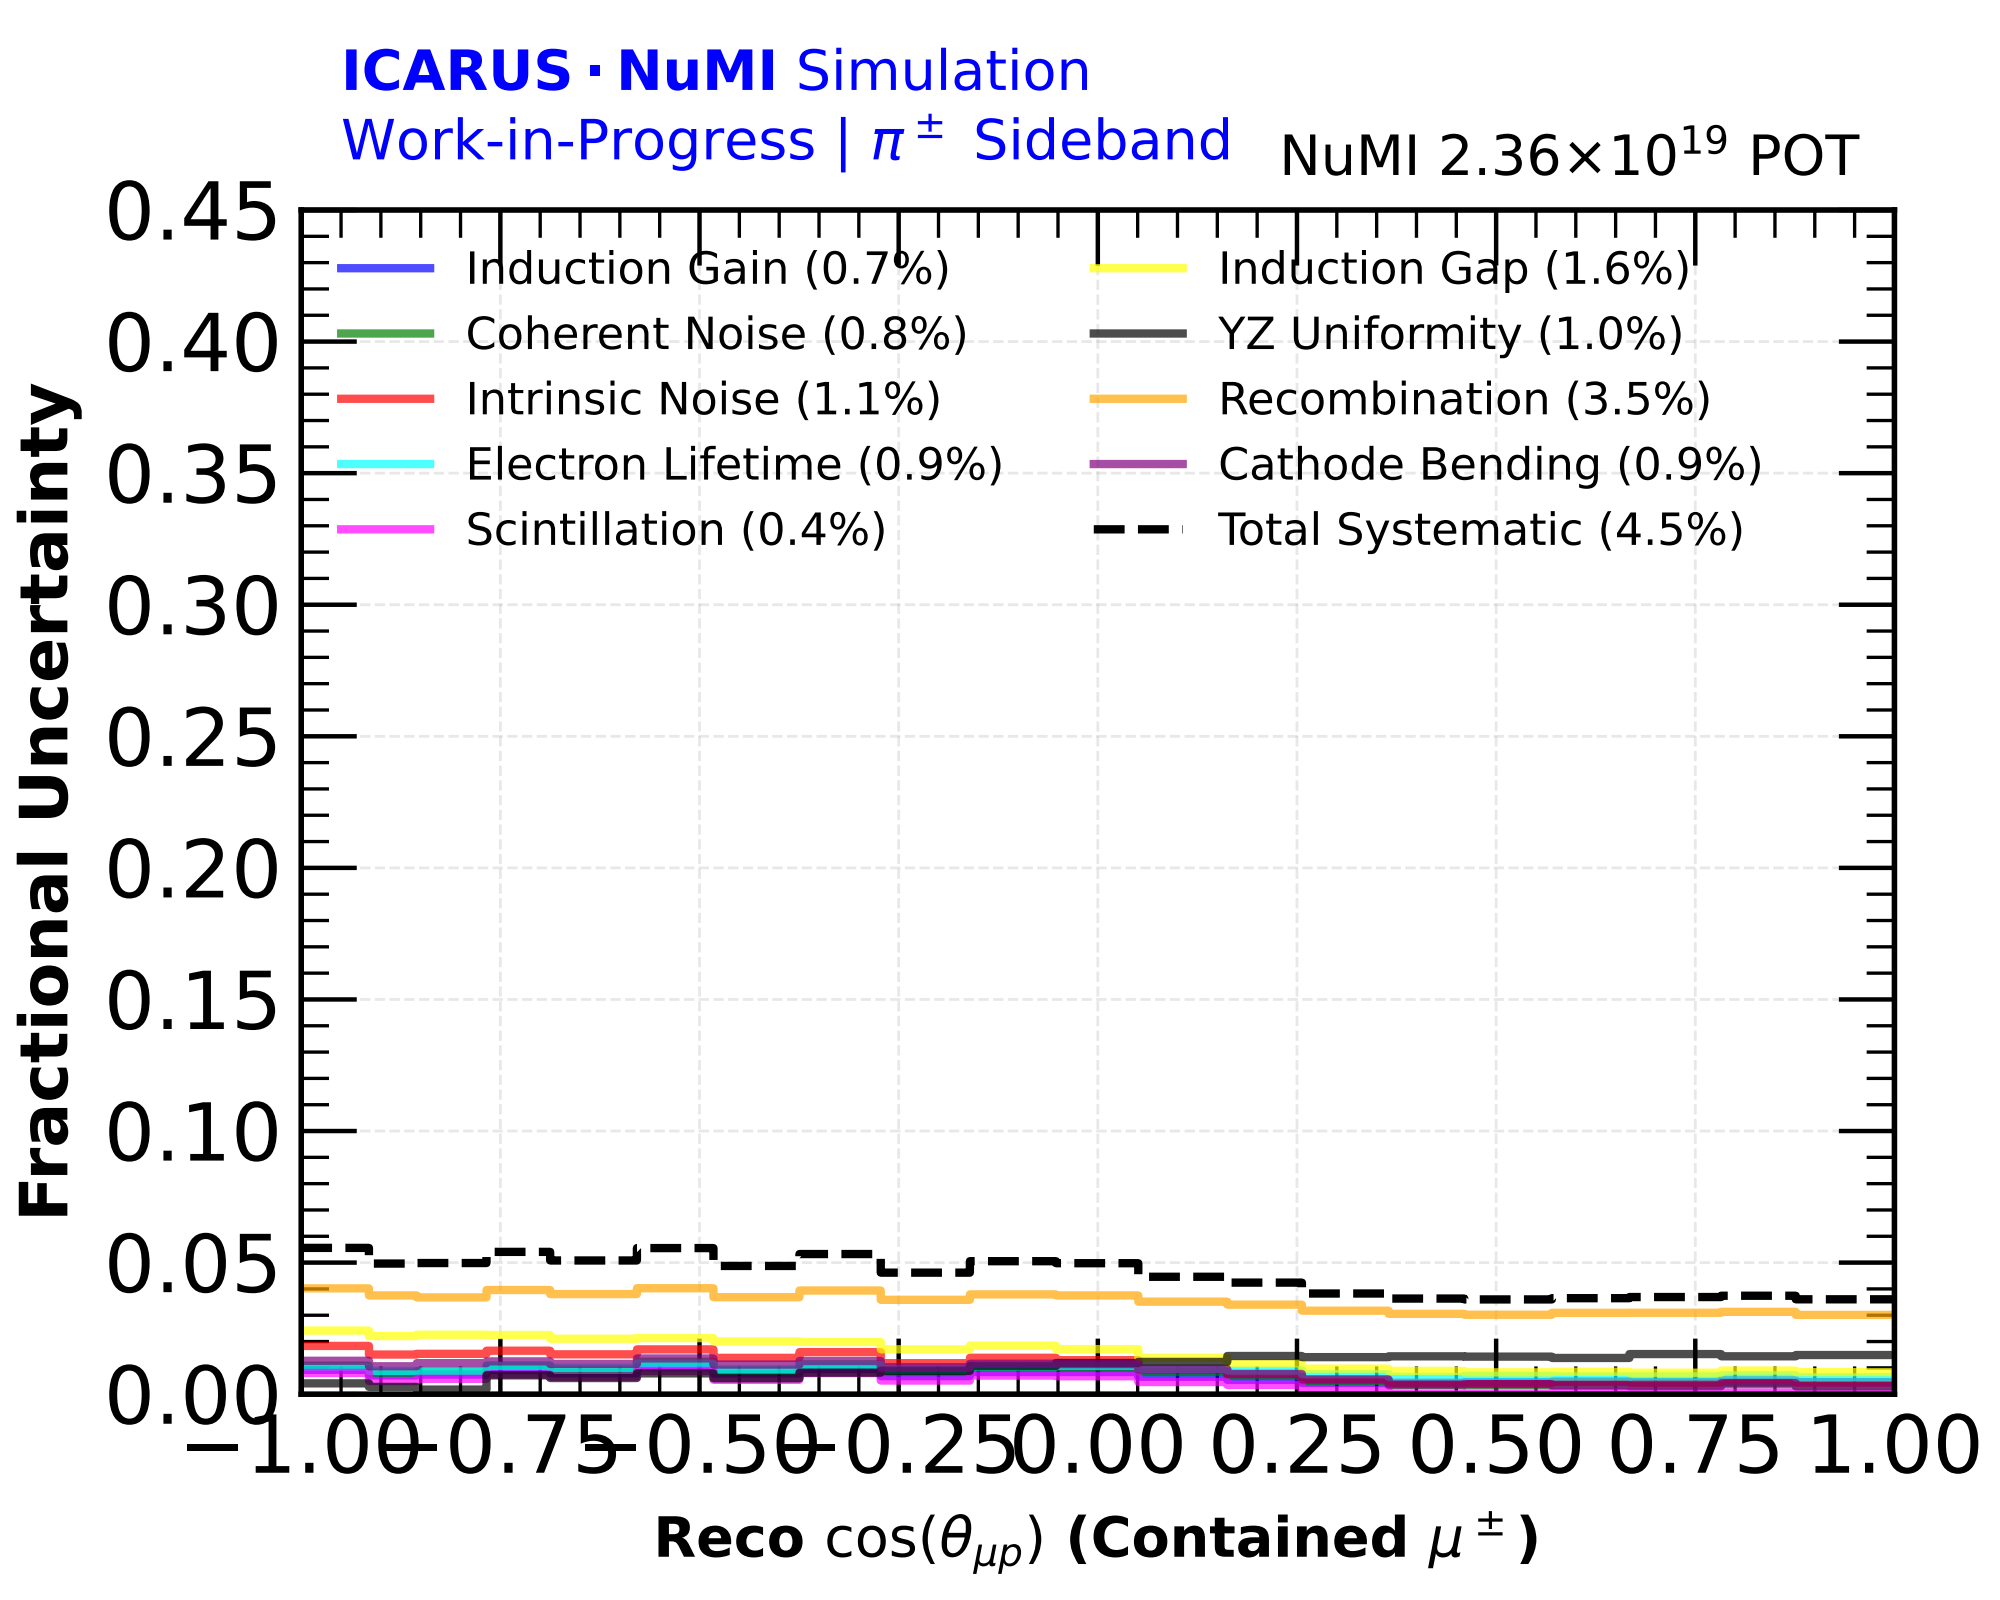
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (0.7%)
Coherent Noise (0.8%)
Intrinsic Noise (1.1%)
Electron Lifetime (0.9%)
Scintillation (0.4%)
Induction Gap (1.6%)
YZ Uniformity (1.0%)
Recombination (3.5%)
Cathode Bending (0.9%)
Total Systematic (4.5%)
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−1.00
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
1.00
Reco cos(θμp) (Contained μ±)