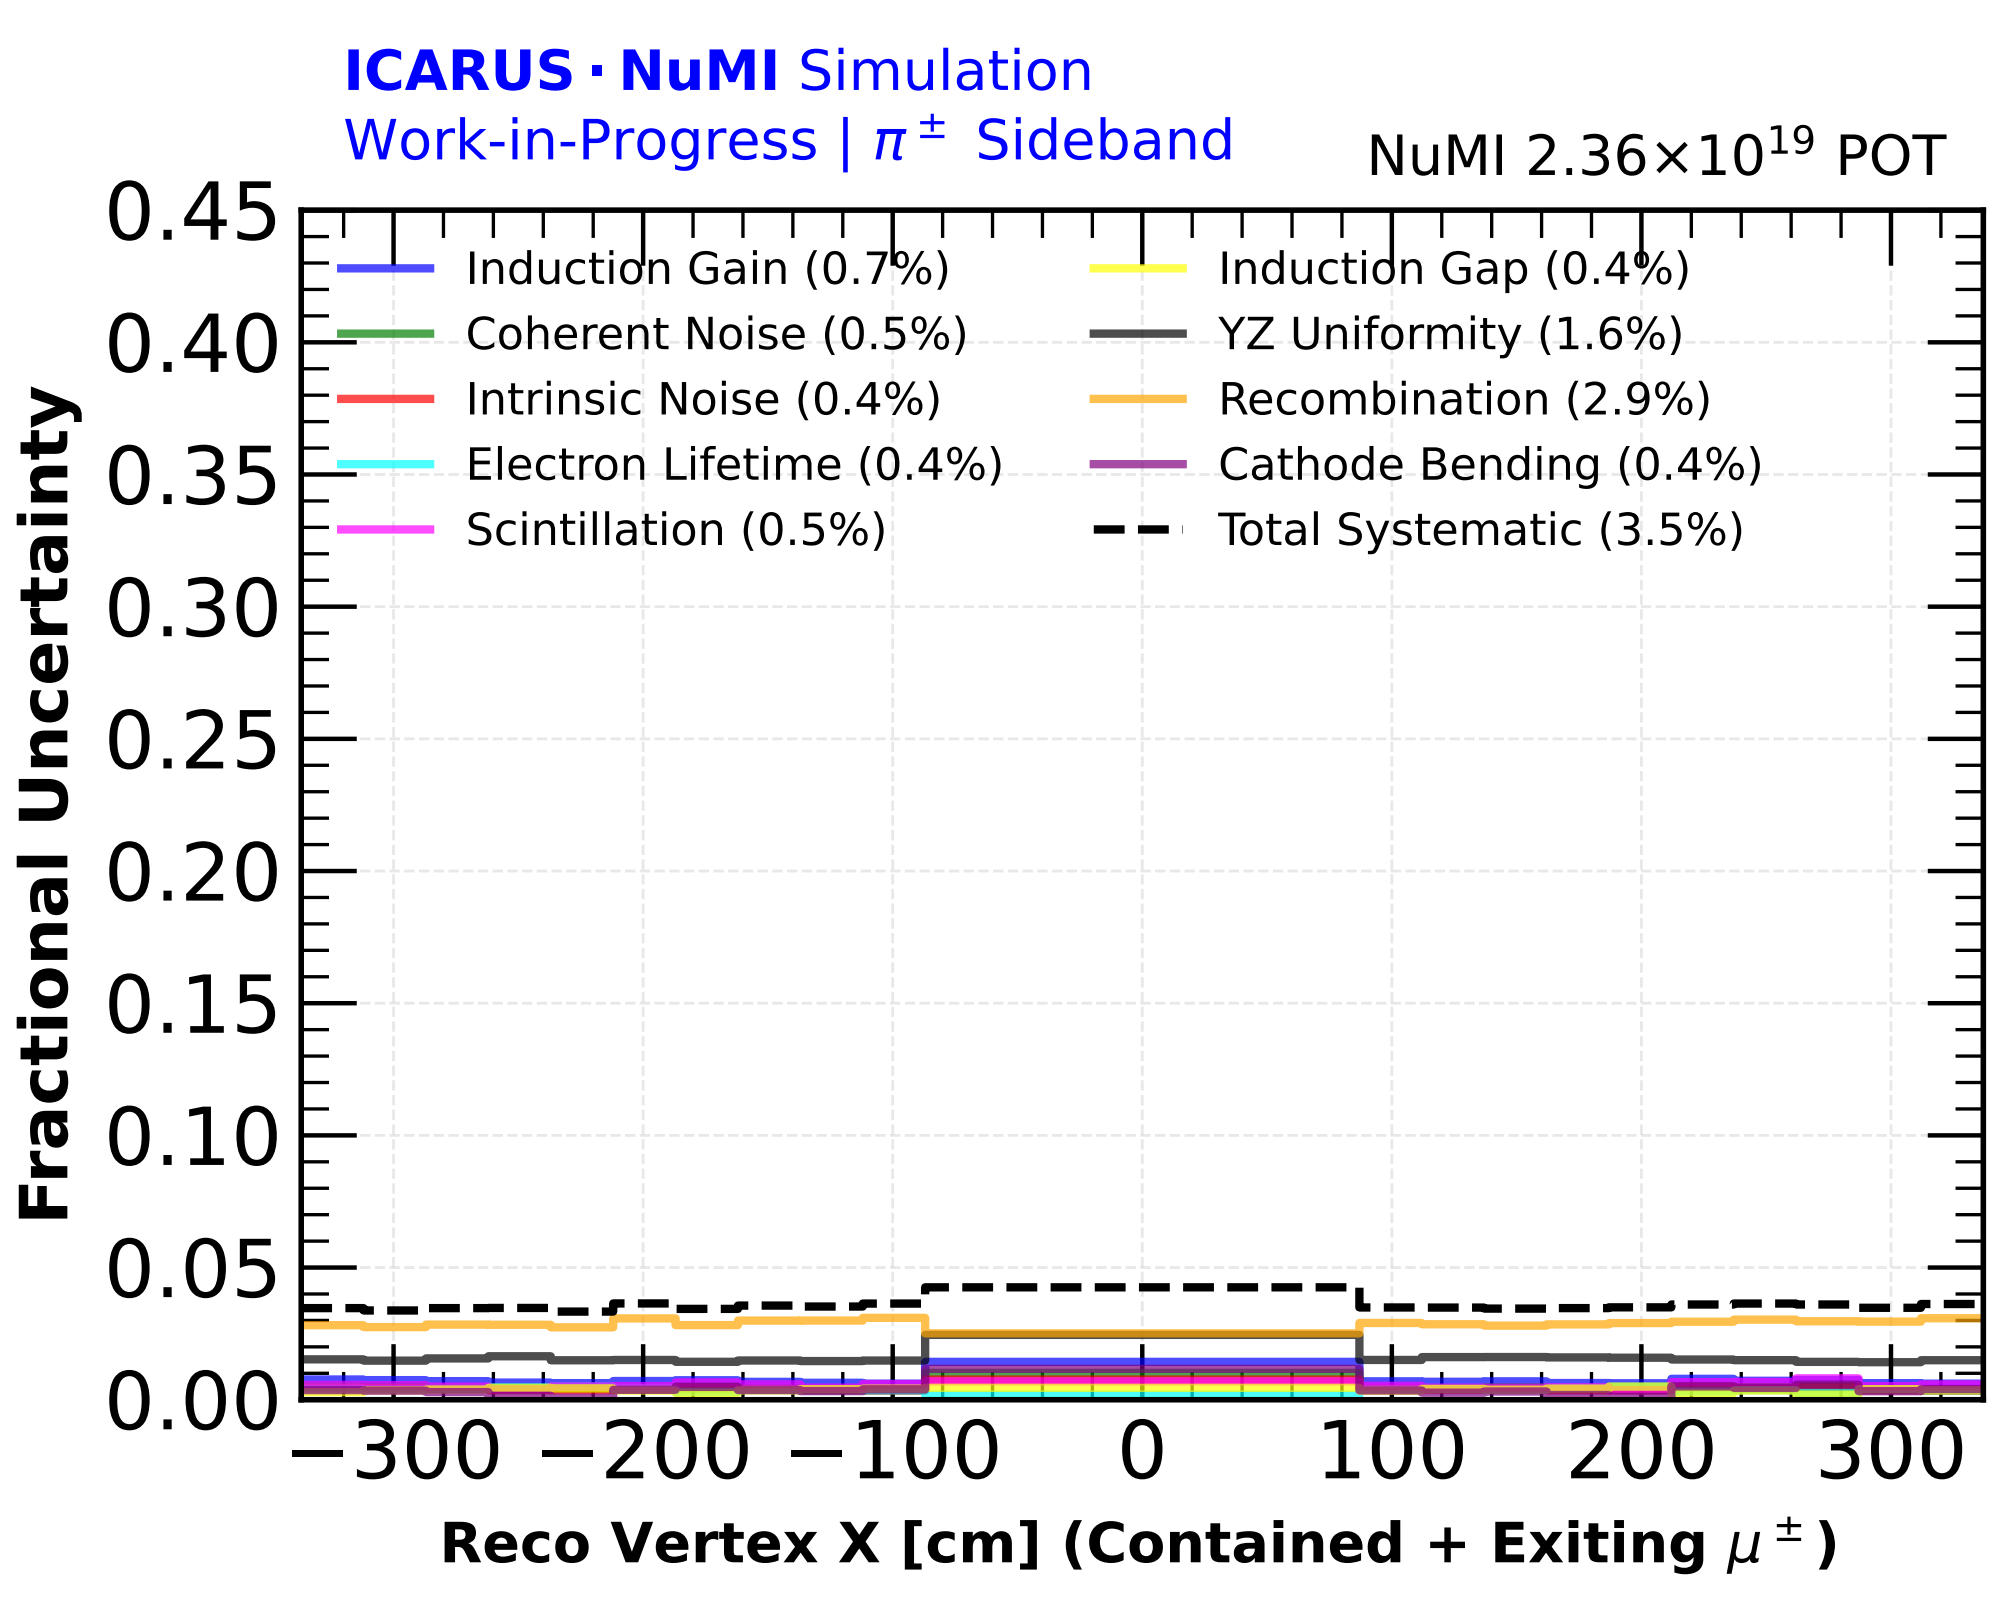
ICARUS · NuMI Simulation
Work-in-Progress | $\pi^{\pm}$ Sideband
NuMI 2.36×10^{19} POT
Induction Gain (0.7%)
Coherent Noise (0.5%)
Intrinsic Noise (0.4%)
Electron Lifetime (0.4%)
Scintillation (0.5%)
Induction Gap (0.4%)
YZ Uniformity (1.6%)
Recombination (2.9%)
Cathode Bending (0.4%)
Total Systematic (3.5%)
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−300
−200
−100
0
100
200
300
Reco Vertex X [cm] (Contained + Exiting $\mu^{\pm}$)