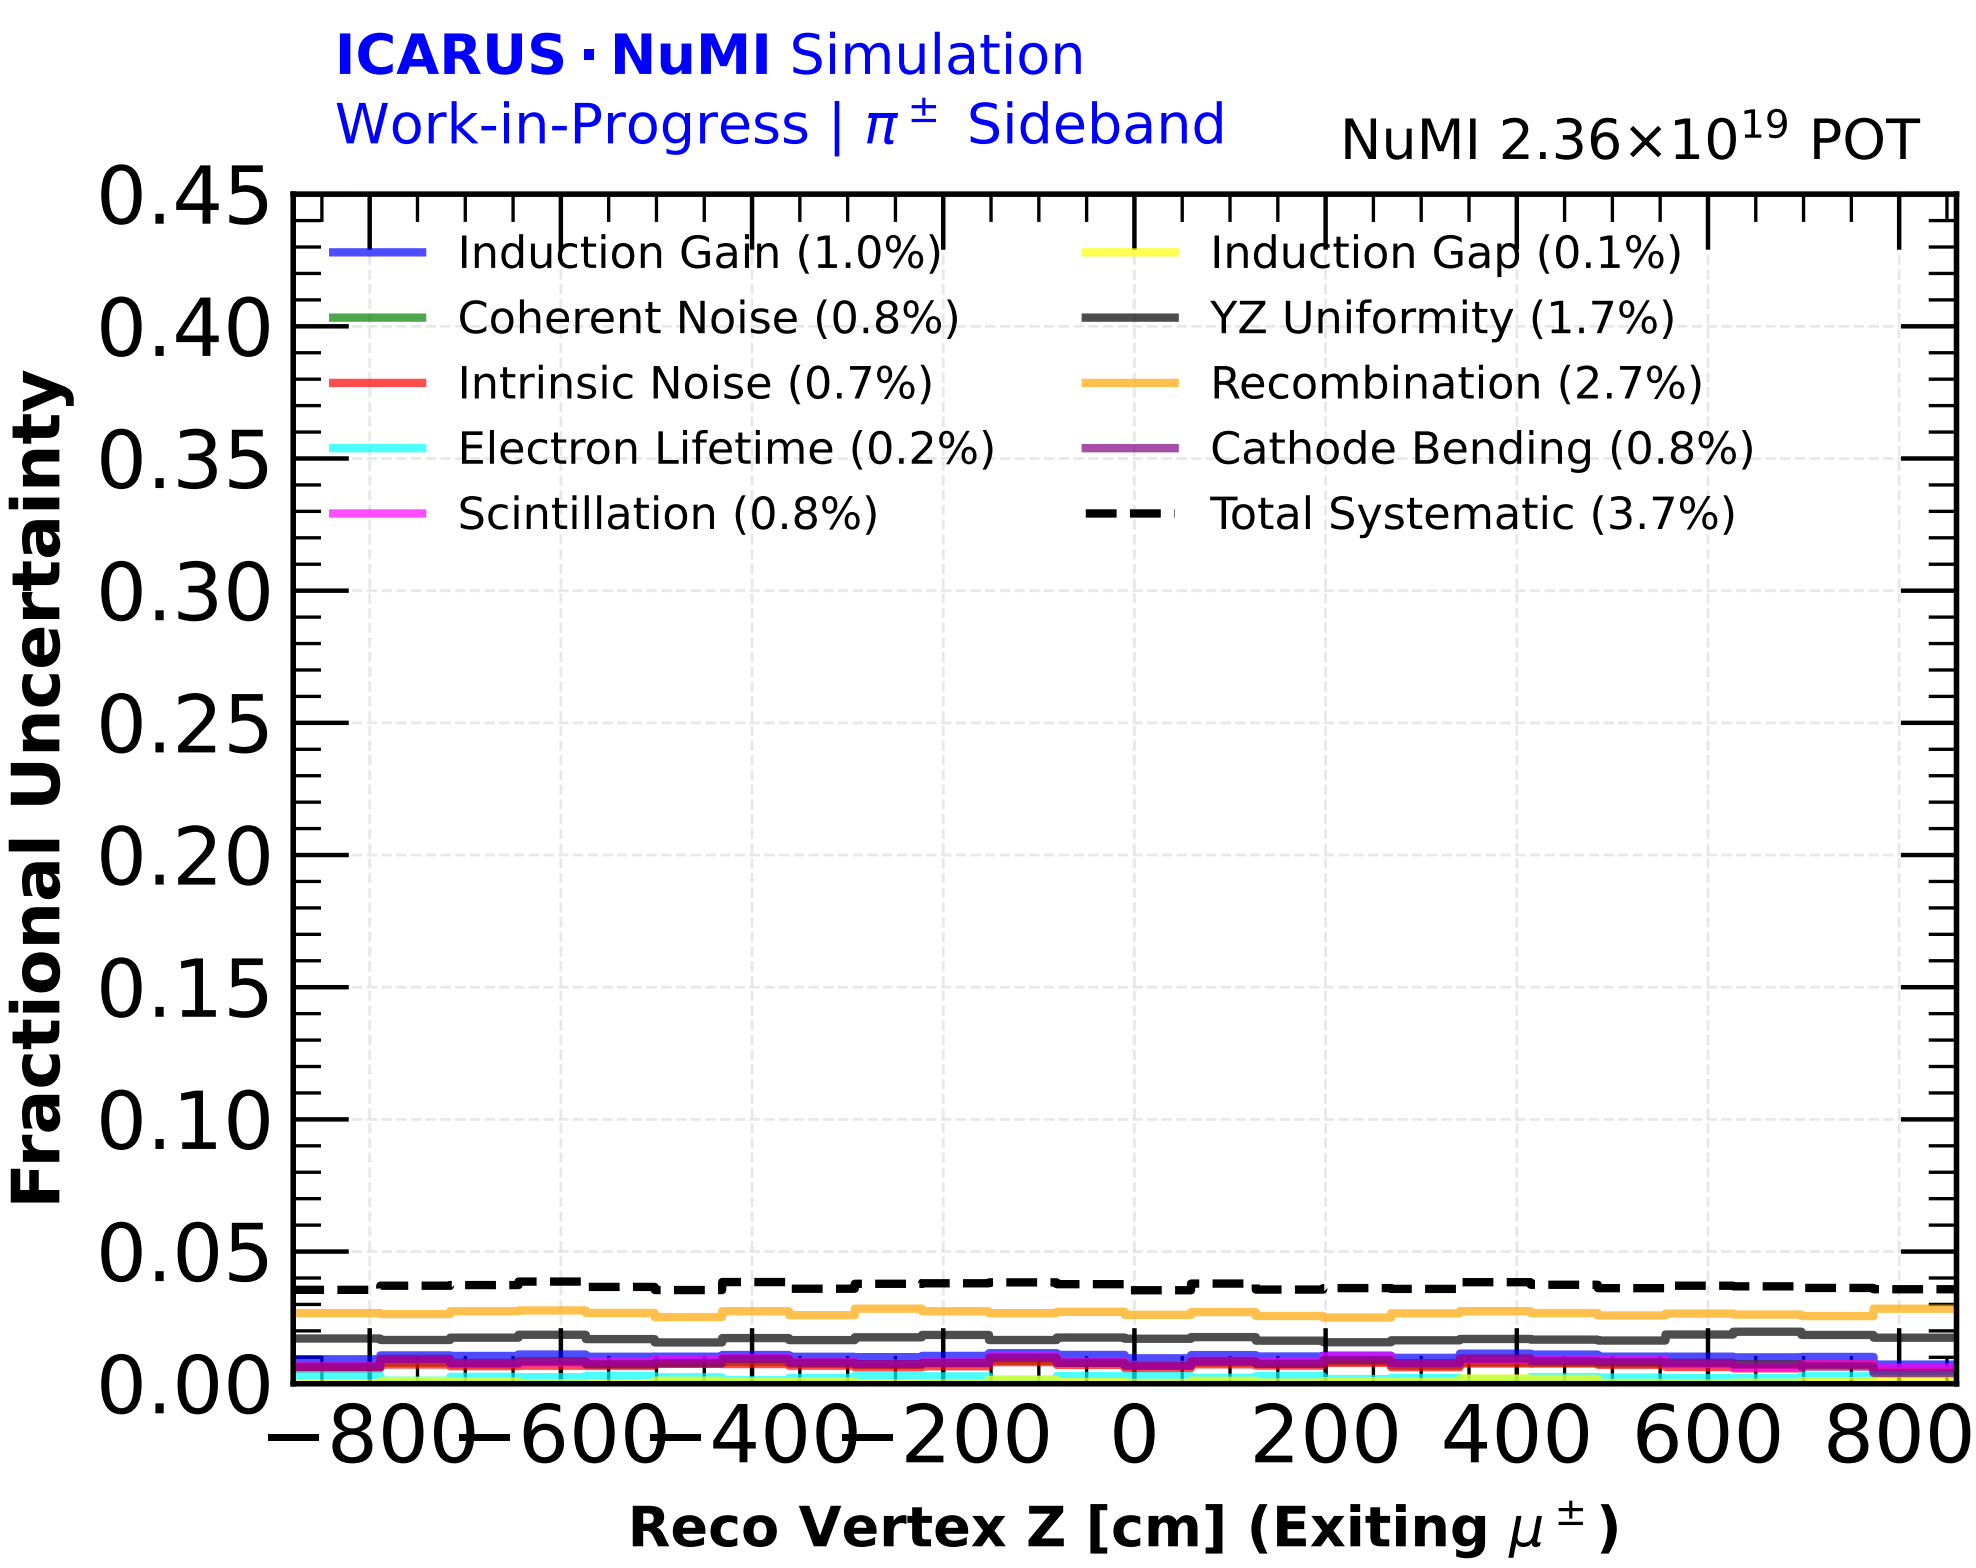
ICARUS · NuMI Simulation
Work-in-Progress | π± Sideband
NuMI 2.36×10^19 POT
Induction Gain (1.0%)
Coherent Noise (0.8%)
Intrinsic Noise (0.7%)
Electron Lifetime (0.2%)
Scintillation (0.8%)
Induction Gap (0.1%)
YZ Uniformity (1.7%)
Recombination (2.7%)
Cathode Bending (0.8%)
Total Systematic (3.7%)
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−800
−600
−400
−200
0
200
400
600
800
Reco Vertex Z [cm] (Exiting μ±)