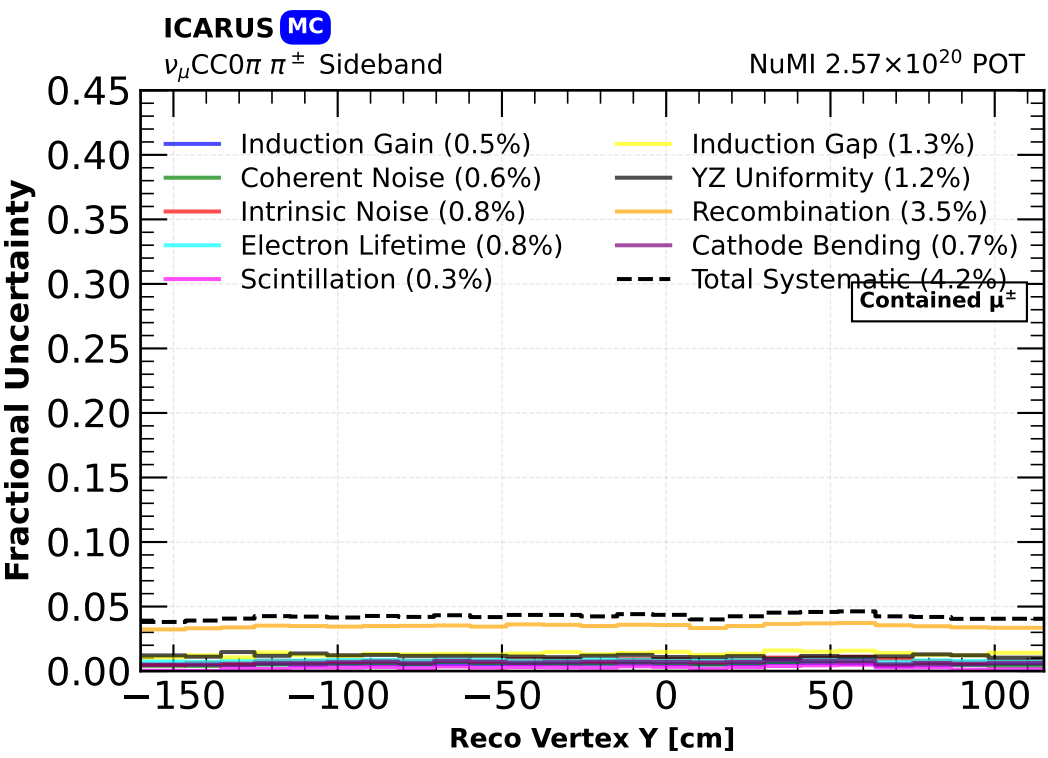
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.5%)
Coherent Noise (0.6%)
Intrinsic Noise (0.8%)
Electron Lifetime (0.8%)
Scintillation (0.3%)
Induction Gap (1.3%)
YZ Uniformity (1.2%)
Recombination (3.5%)
Cathode Bending (0.7%)
Total Systematic (4.2%)
Contained μ±
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−150
−100
−50
0
50
100
Reco Vertex Y [cm]