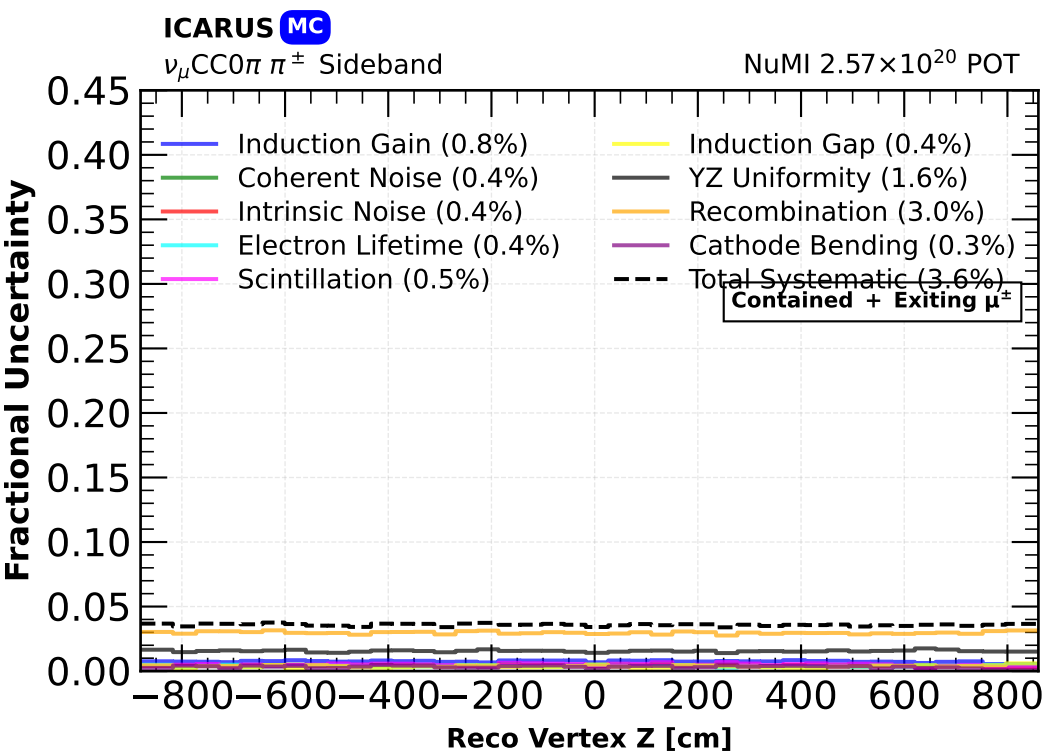
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.8%)
Coherent Noise (0.4%)
Intrinsic Noise (0.4%)
Electron Lifetime (0.4%)
Scintillation (0.5%)
Induction Gap (0.4%)
YZ Uniformity (1.6%)
Recombination (3.0%)
Cathode Bending (0.3%)
Total Systematic (3.6%)
Contained + Exiting μ±
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−800
−600
−400
−200
0
200
400
600
800
Reco Vertex Z [cm]