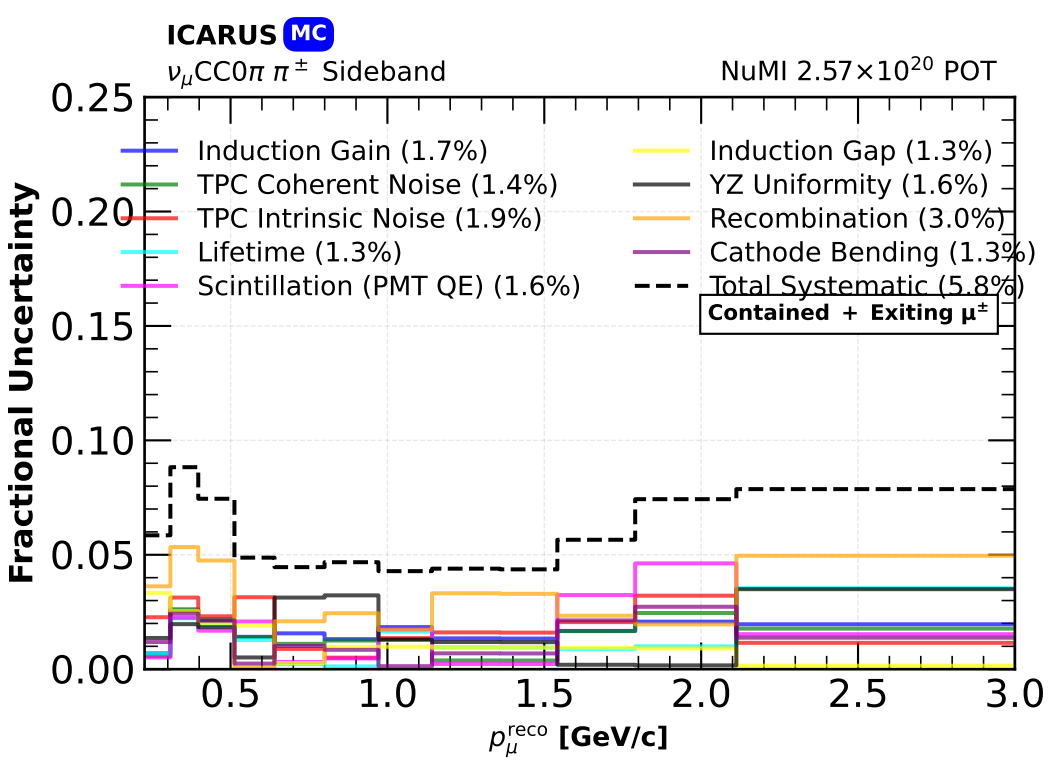
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (1.7%)
TPC Coherent Noise (1.4%)
TPC Intrinsic Noise (1.9%)
Lifetime (1.3%)
Scintillation (PMT QE) (1.6%)
Induction Gap (1.3%)
YZ Uniformity (1.6%)
Recombination (3.0%)
Cathode Bending (1.3%)
Total Systematic (5.8%)
Contained + Exiting μ$^\pm$
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0.5
1.0
1.5
2.0
2.5
3.0
p_μ^{reco} [GeV/c]