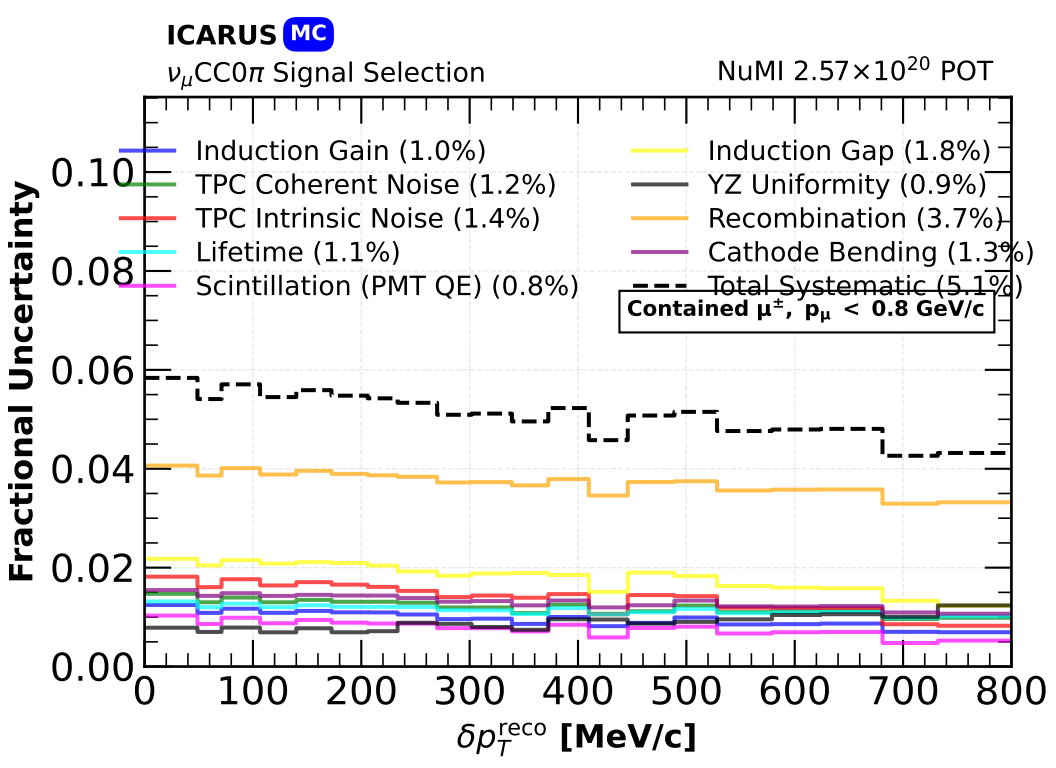
ICARUS MC
$\nu_\mu$CC0$\pi$ Signal Selection
NuMI 2.57×10$^{20}$ POT
Induction Gain (1.0%)
TPC Coherent Noise (1.2%)
TPC Intrinsic Noise (1.4%)
Lifetime (1.1%)
Scintillation (PMT QE) (0.8%)
Induction Gap (1.8%)
YZ Uniformity (0.9%)
Recombination (3.7%)
Cathode Bending (1.3%)
Total Systematic (5.1%)
Contained μ±, pμ < 0.8 GeV/c
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0.10
0
100
200
300
400
500
600
700
800
$\delta p_T^{\text{reco}}$ [MeV/c]