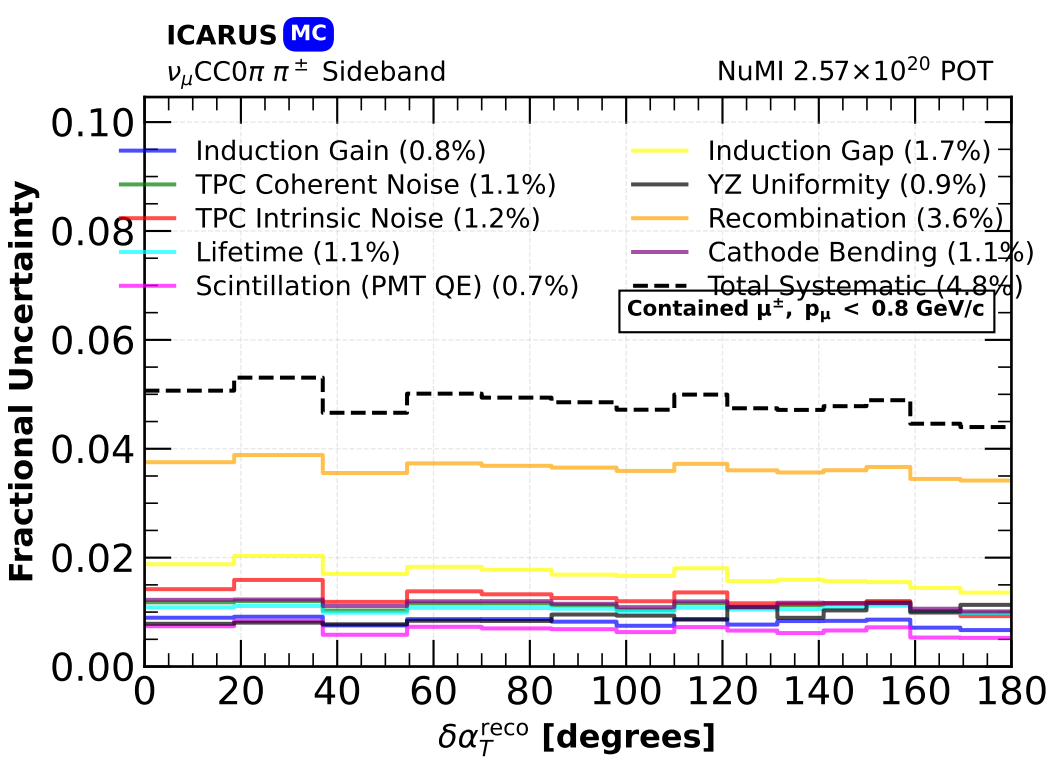
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.8%)
TPC Coherent Noise (1.1%)
TPC Intrinsic Noise (1.2%)
Lifetime (1.1%)
Scintillation (PMT QE) (0.7%)
Induction Gap (1.7%)
YZ Uniformity (0.9%)
Recombination (3.6%)
Cathode Bending (1.1%)
Total Systematic (4.8%)
Contained μ$^\pm$, p$_\mu$ < 0.8 GeV/c
Fractional Uncertainty
0.10
0.08
0.06
0.04
0.02
0.00
0
20
40
60
80
100
120
140
160
180
$\delta\alpha_T^{\mathrm{reco}}$ [degrees]