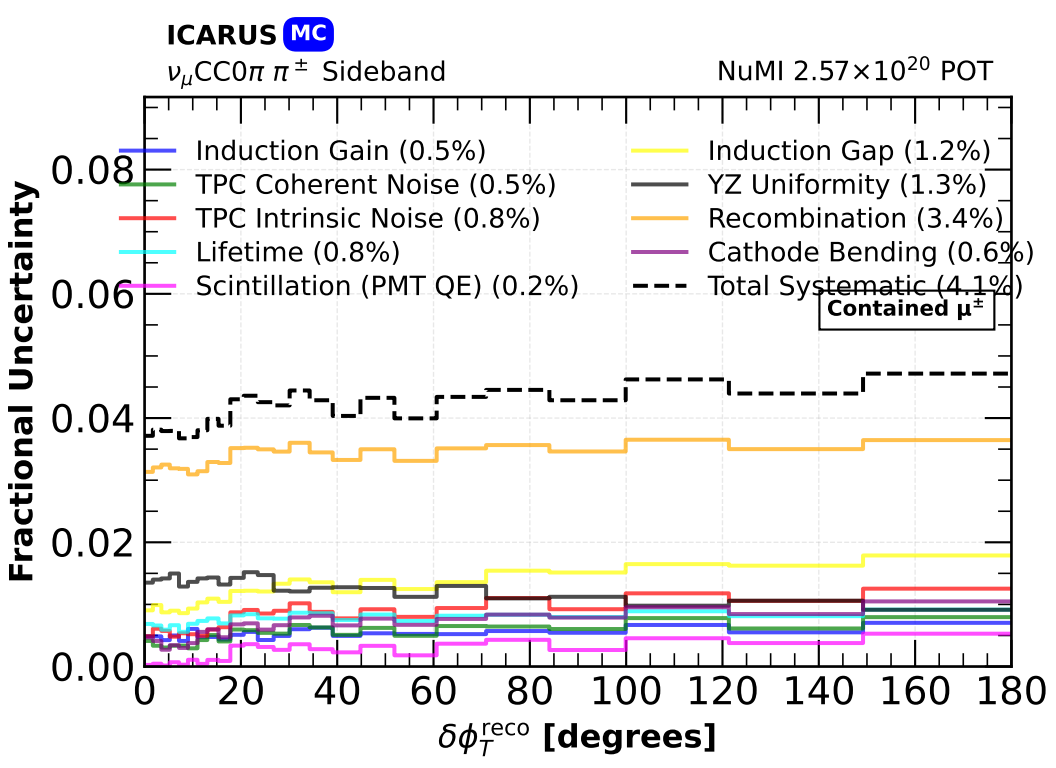
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.5%)
TPC Coherent Noise (0.5%)
TPC Intrinsic Noise (0.8%)
Lifetime (0.8%)
Scintillation (PMT QE) (0.2%)
Induction Gap (1.2%)
YZ Uniformity (1.3%)
Recombination (3.4%)
Cathode Bending (0.6%)
Total Systematic (4.1%)
Contained μ$^\pm$
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0
20
40
60
80
100
120
140
160
180
$\delta\phi_T^{\text{reco}}$ [degrees]