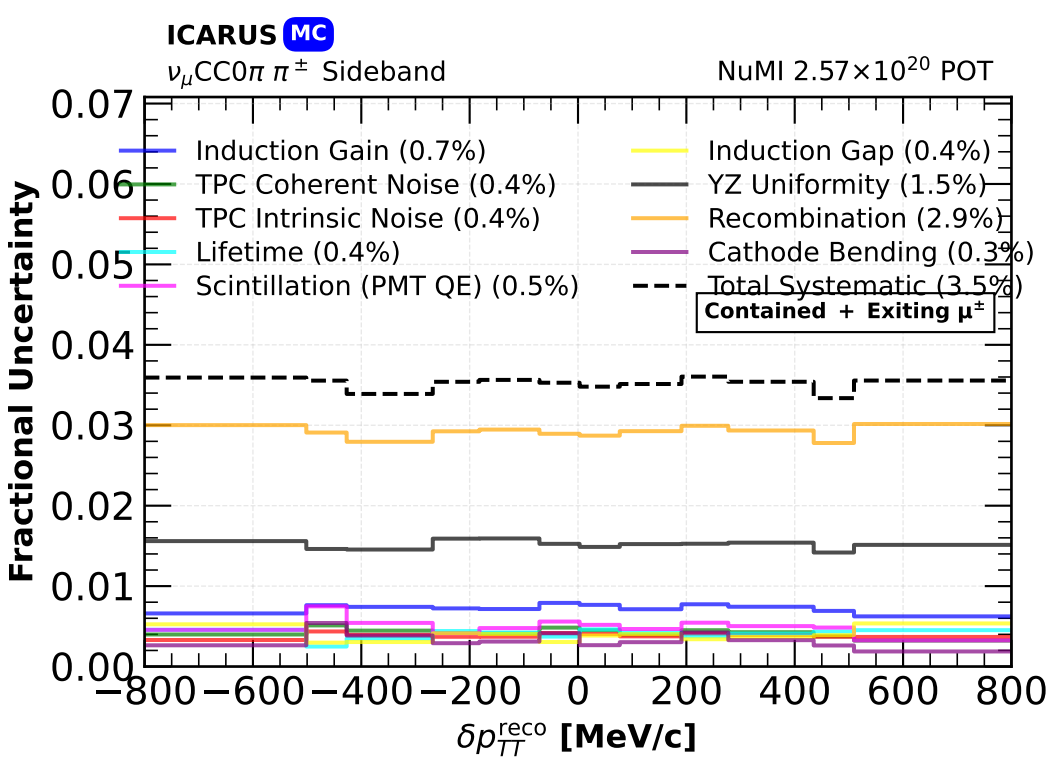
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (0.7%)
TPC Coherent Noise (0.4%)
TPC Intrinsic Noise (0.4%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.5%)
Induction Gap (0.4%)
YZ Uniformity (1.5%)
Recombination (2.9%)
Cathode Bending (0.3%)
Total Systematic (3.5%)
Contained + Exiting μ$^\pm$
Fractional Uncertainty
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
−800 −600 −400 −200 0 200 400 600 800
$\delta p_{TT}^{\text{reco}}$ [MeV/c]