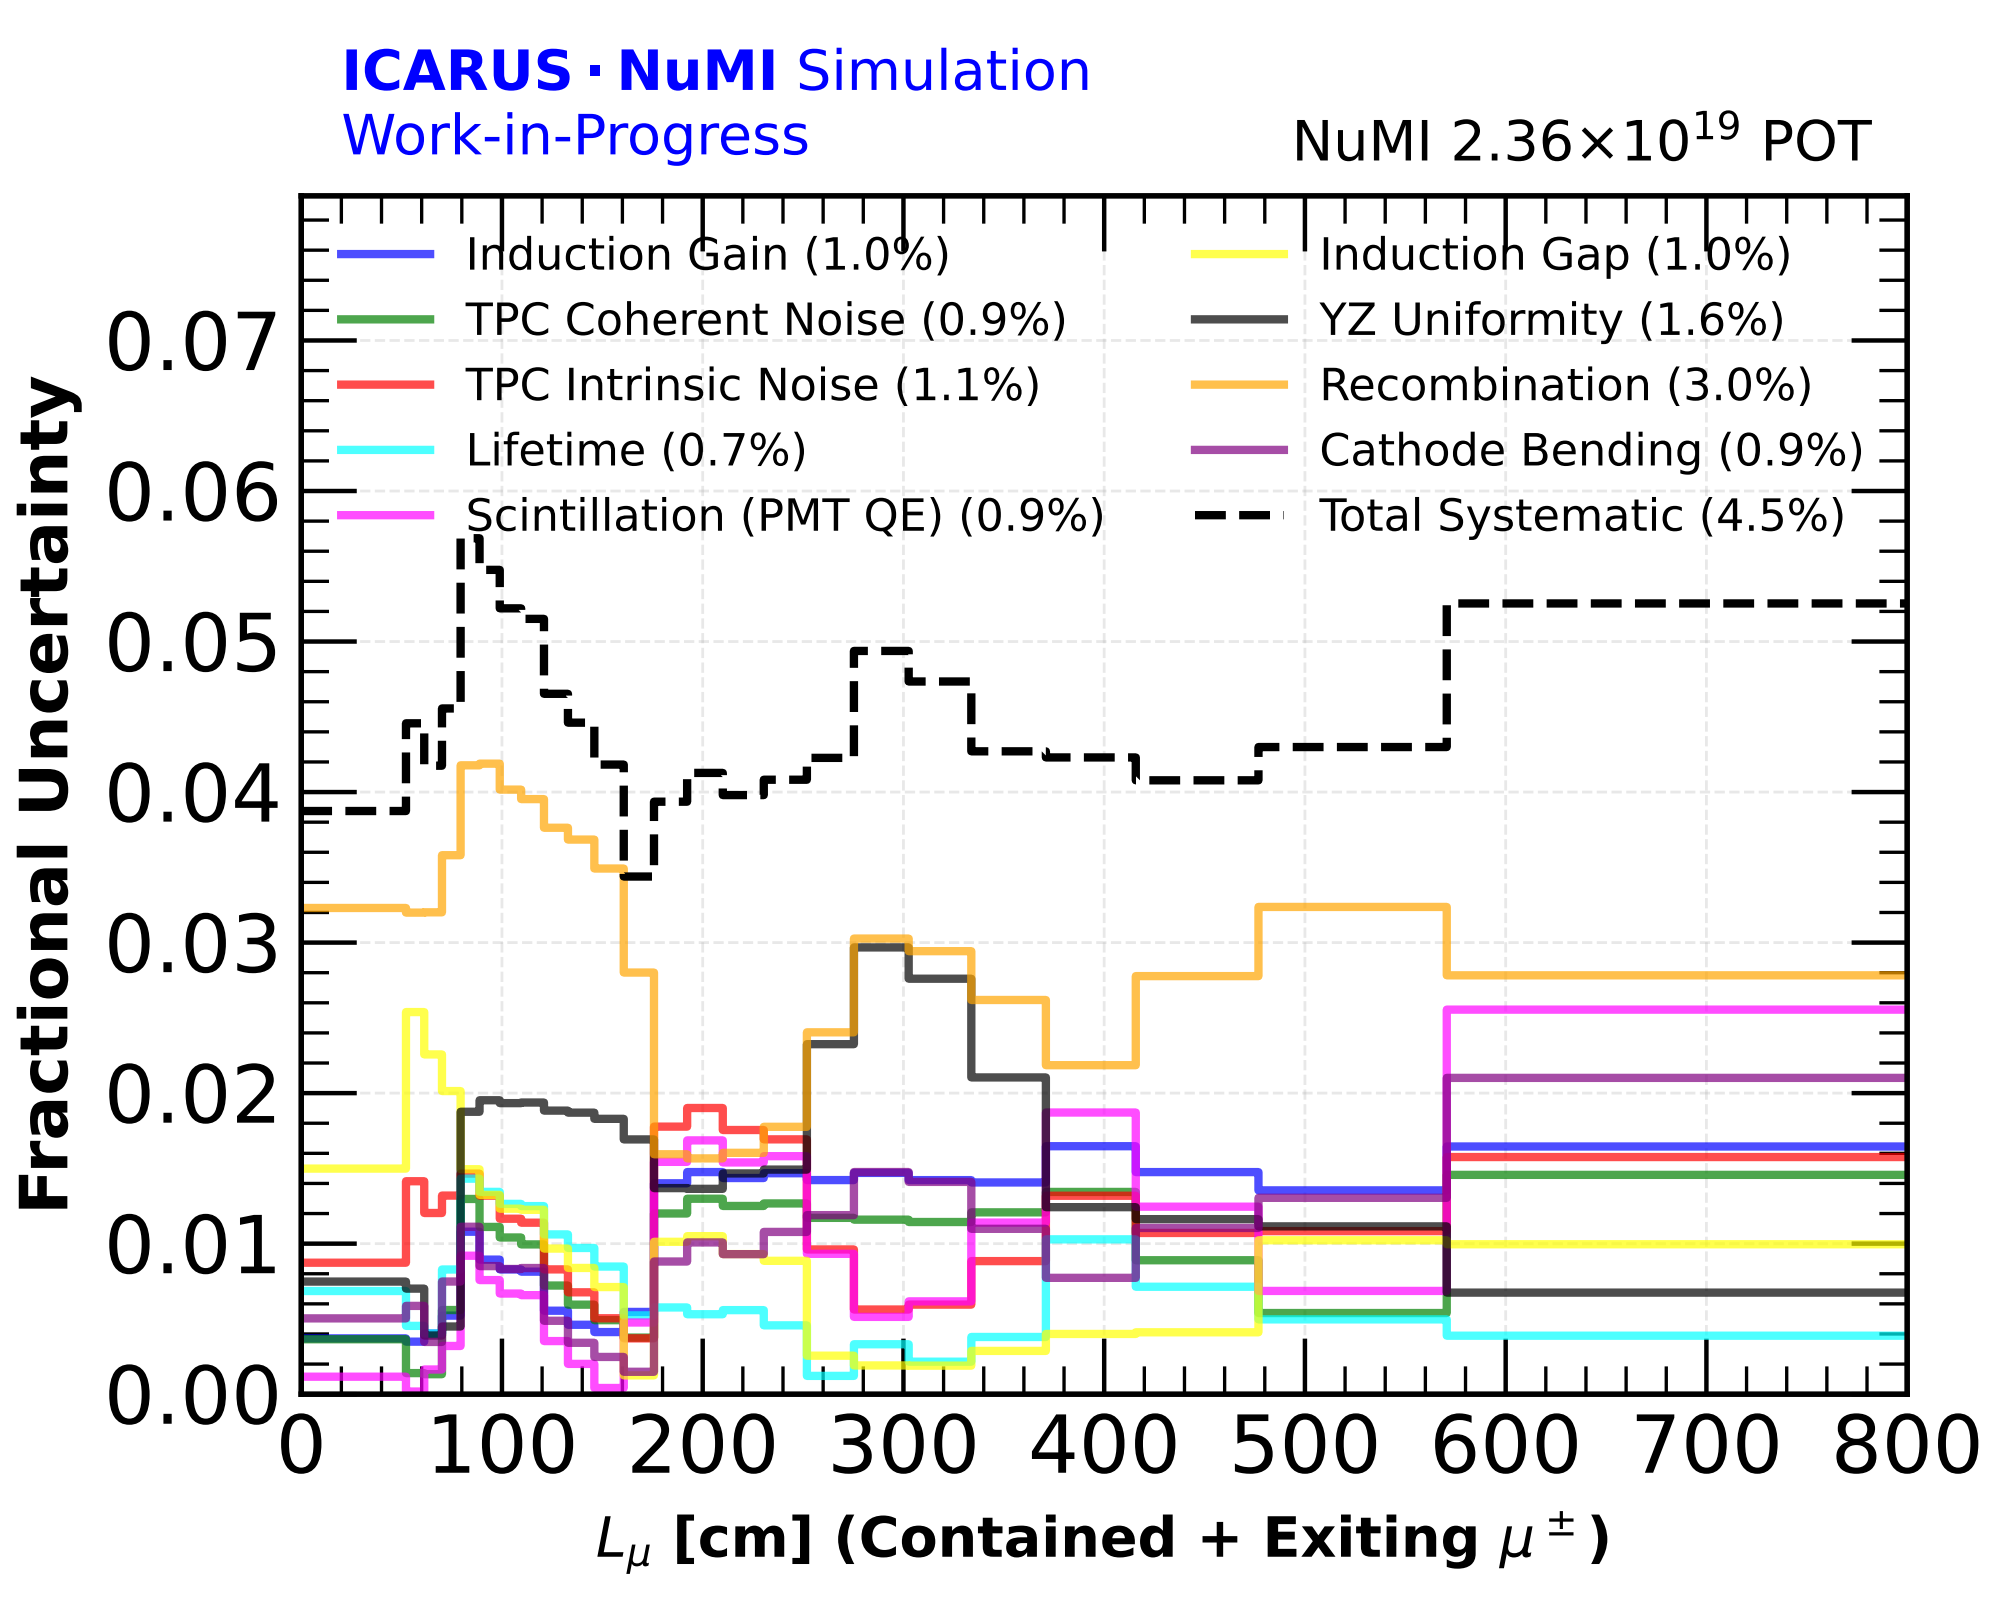
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.0%)
TPC Coherent Noise (0.9%)
TPC Intrinsic Noise (1.1%)
Lifetime (0.7%)
Scintillation (PMT QE) (0.9%)
Induction Gap (1.0%)
YZ Uniformity (1.6%)
Recombination (3.0%)
Cathode Bending (0.9%)
Total Systematic (4.5%)
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0
100
200
300
400
500
600
700
800
L_μ [cm] (Contained + Exiting $\mu^\pm$)