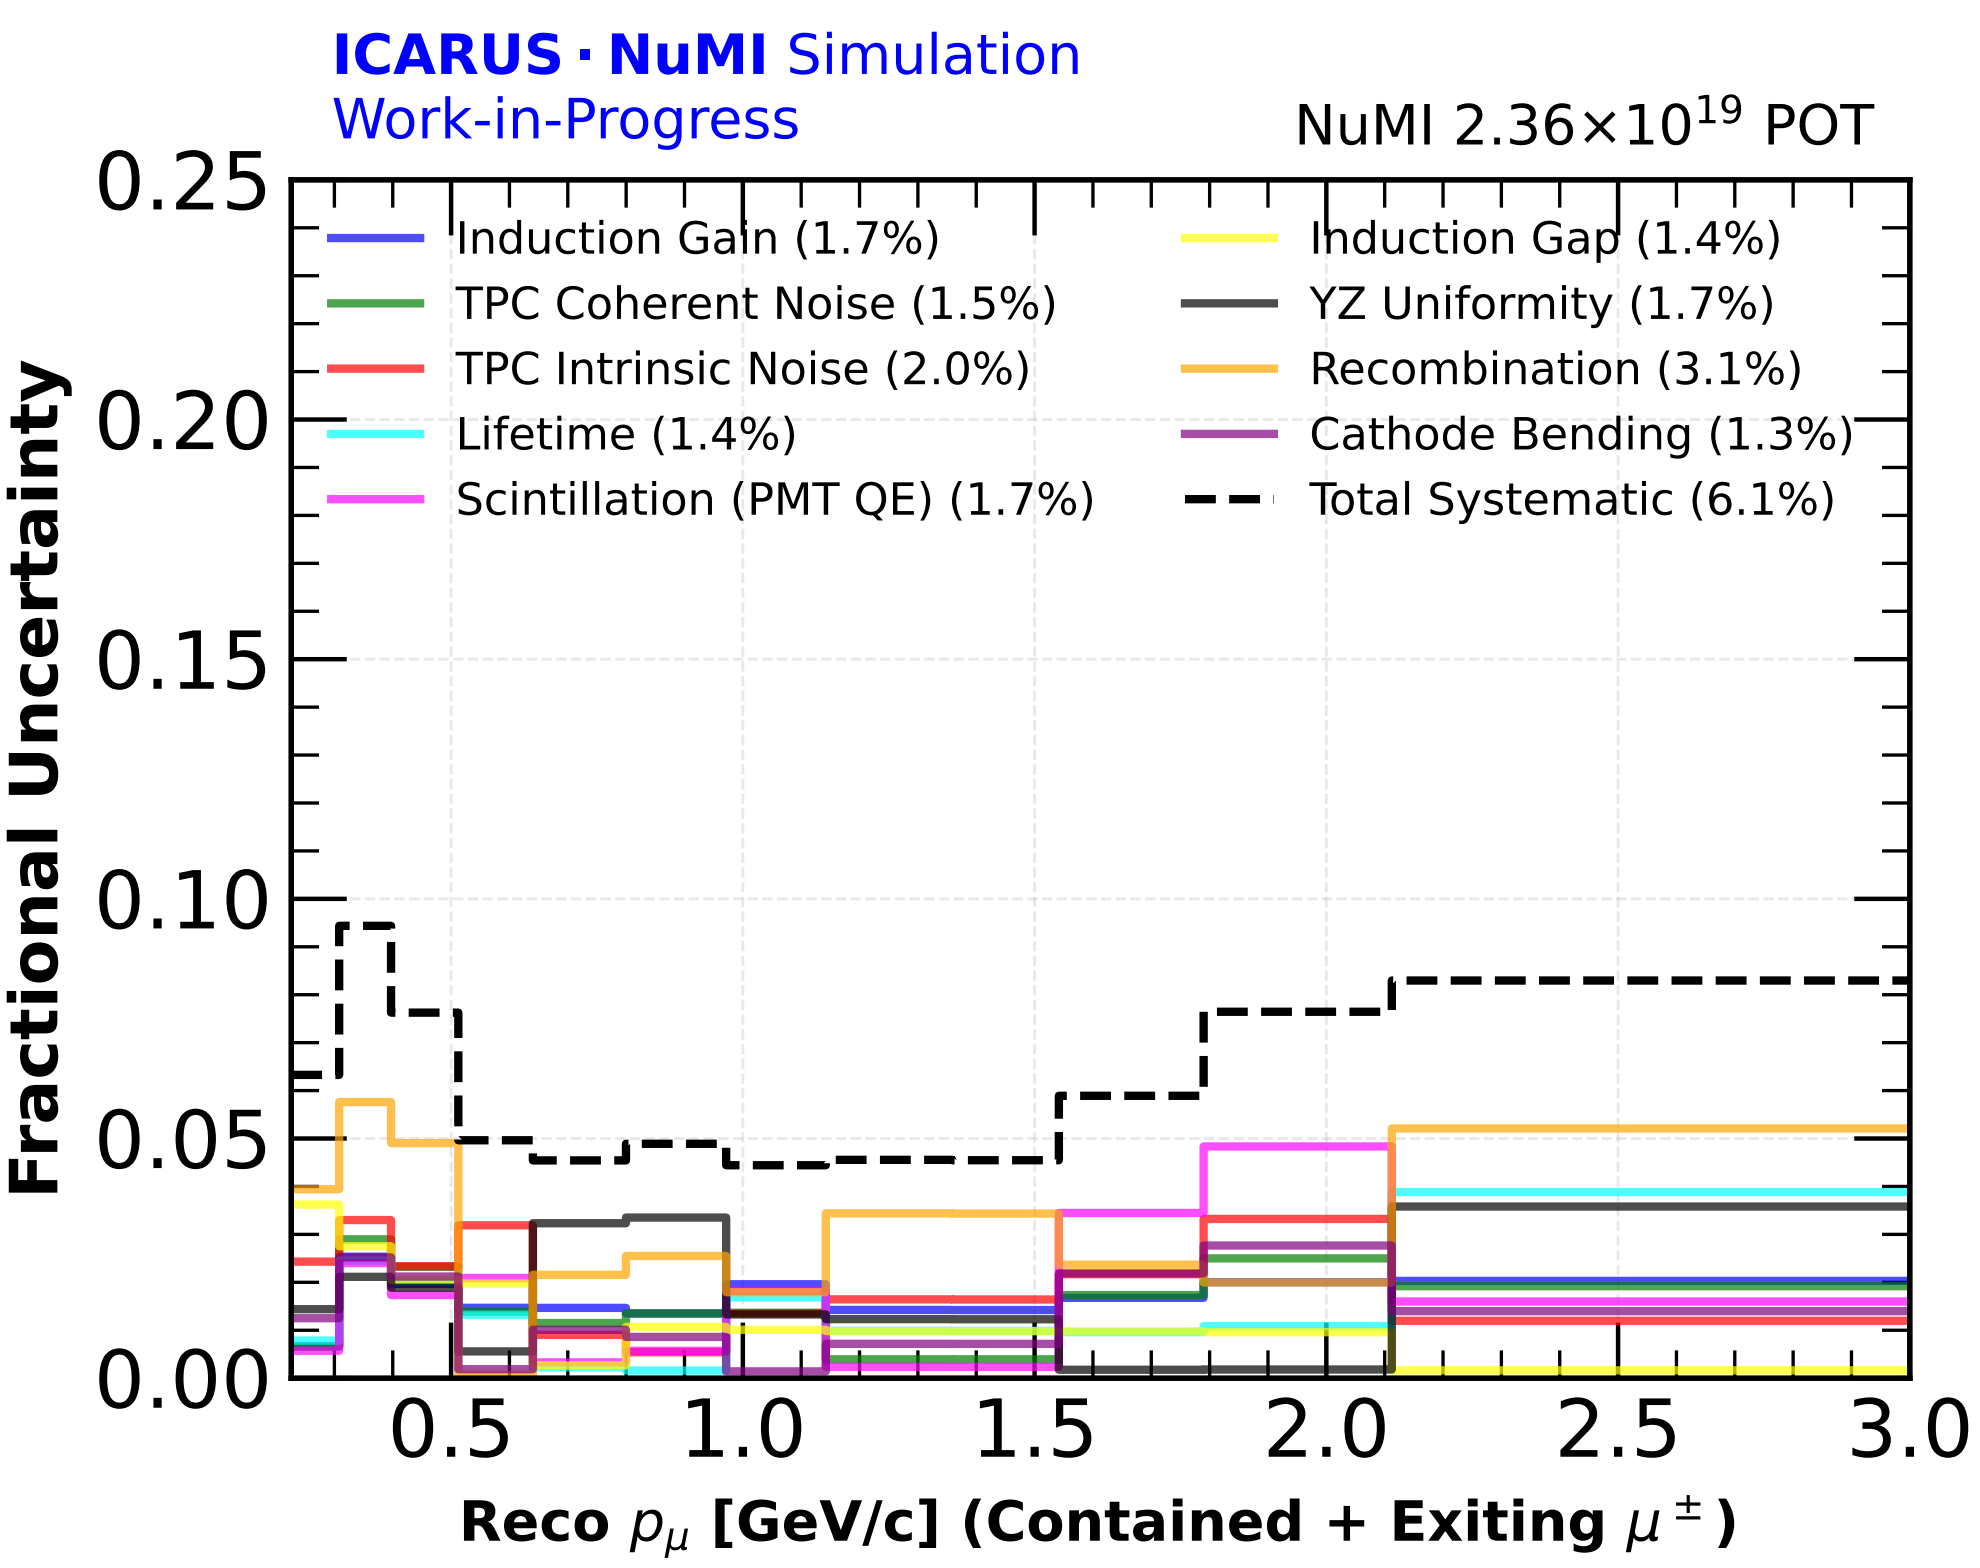
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.7%)
TPC Coherent Noise (1.5%)
TPC Intrinsic Noise (2.0%)
Lifetime (1.4%)
Scintillation (PMT QE) (1.7%)
Induction Gap (1.4%)
YZ Uniformity (1.7%)
Recombination (3.1%)
Cathode Bending (1.3%)
Total Systematic (6.1%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0.5
1.0
1.5
2.0
2.5
3.0
Reco $p_\mu$ [GeV/c] (Contained + Exiting $\mu^\pm$)