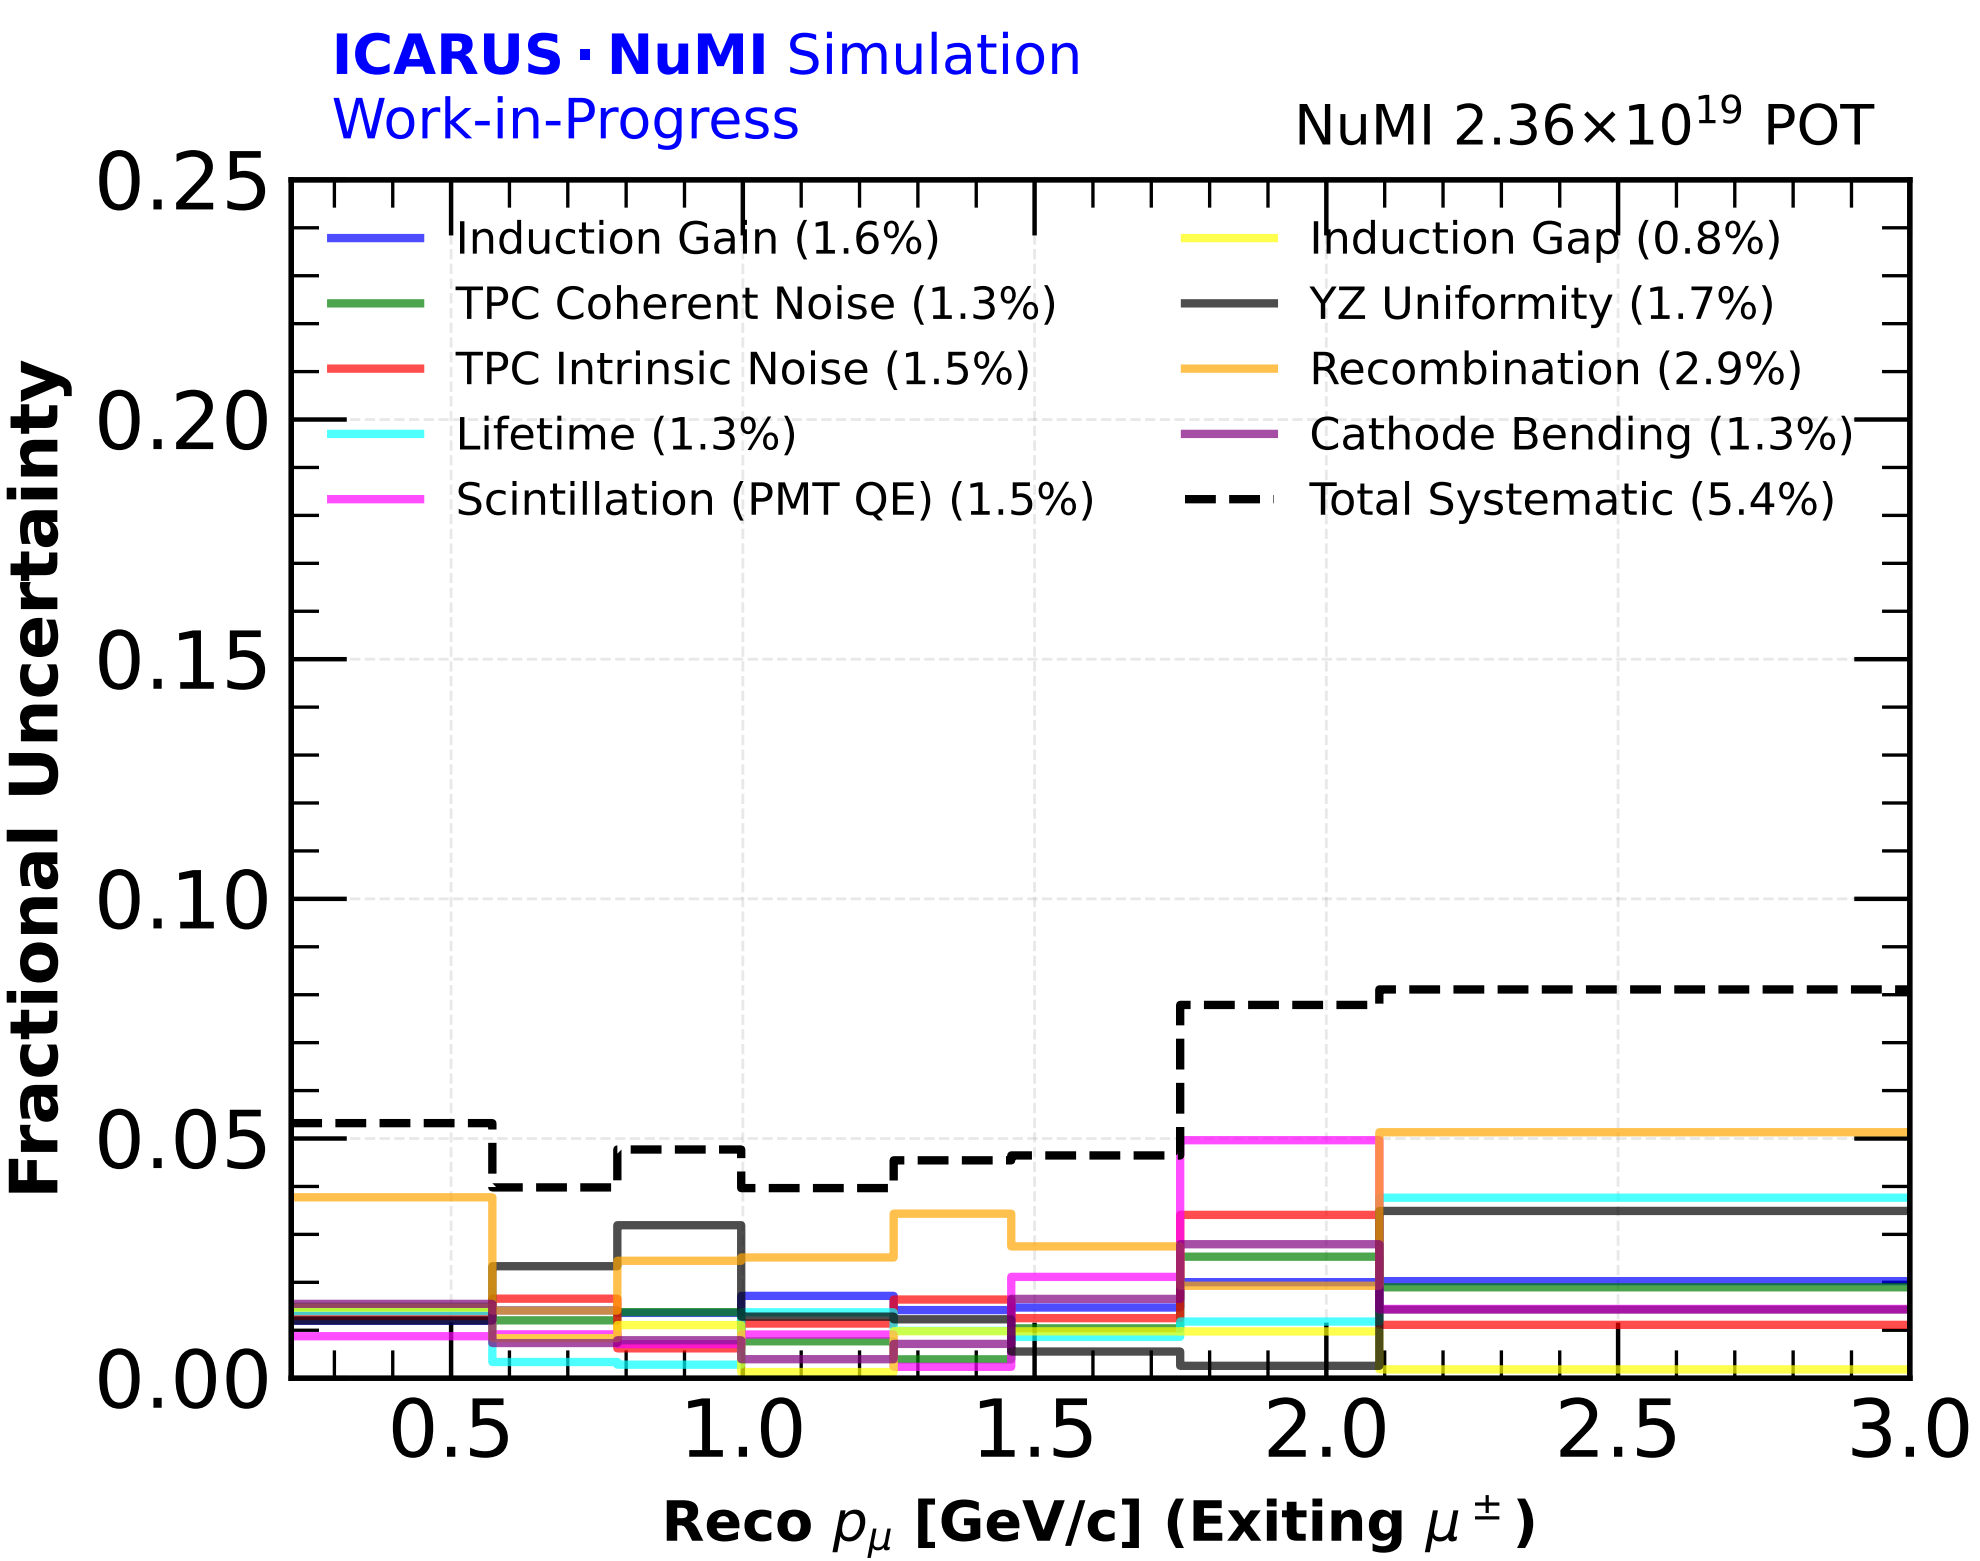
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.6%)
TPC Coherent Noise (1.3%)
TPC Intrinsic Noise (1.5%)
Lifetime (1.3%)
Scintillation (PMT QE) (1.5%)
Induction Gap (0.8%)
YZ Uniformity (1.7%)
Recombination (2.9%)
Cathode Bending (1.3%)
Total Systematic (5.4%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0.5
1.0
1.5
2.0
2.5
3.0
Reco p_μ [GeV/c] (Exiting $\mu^\pm$)