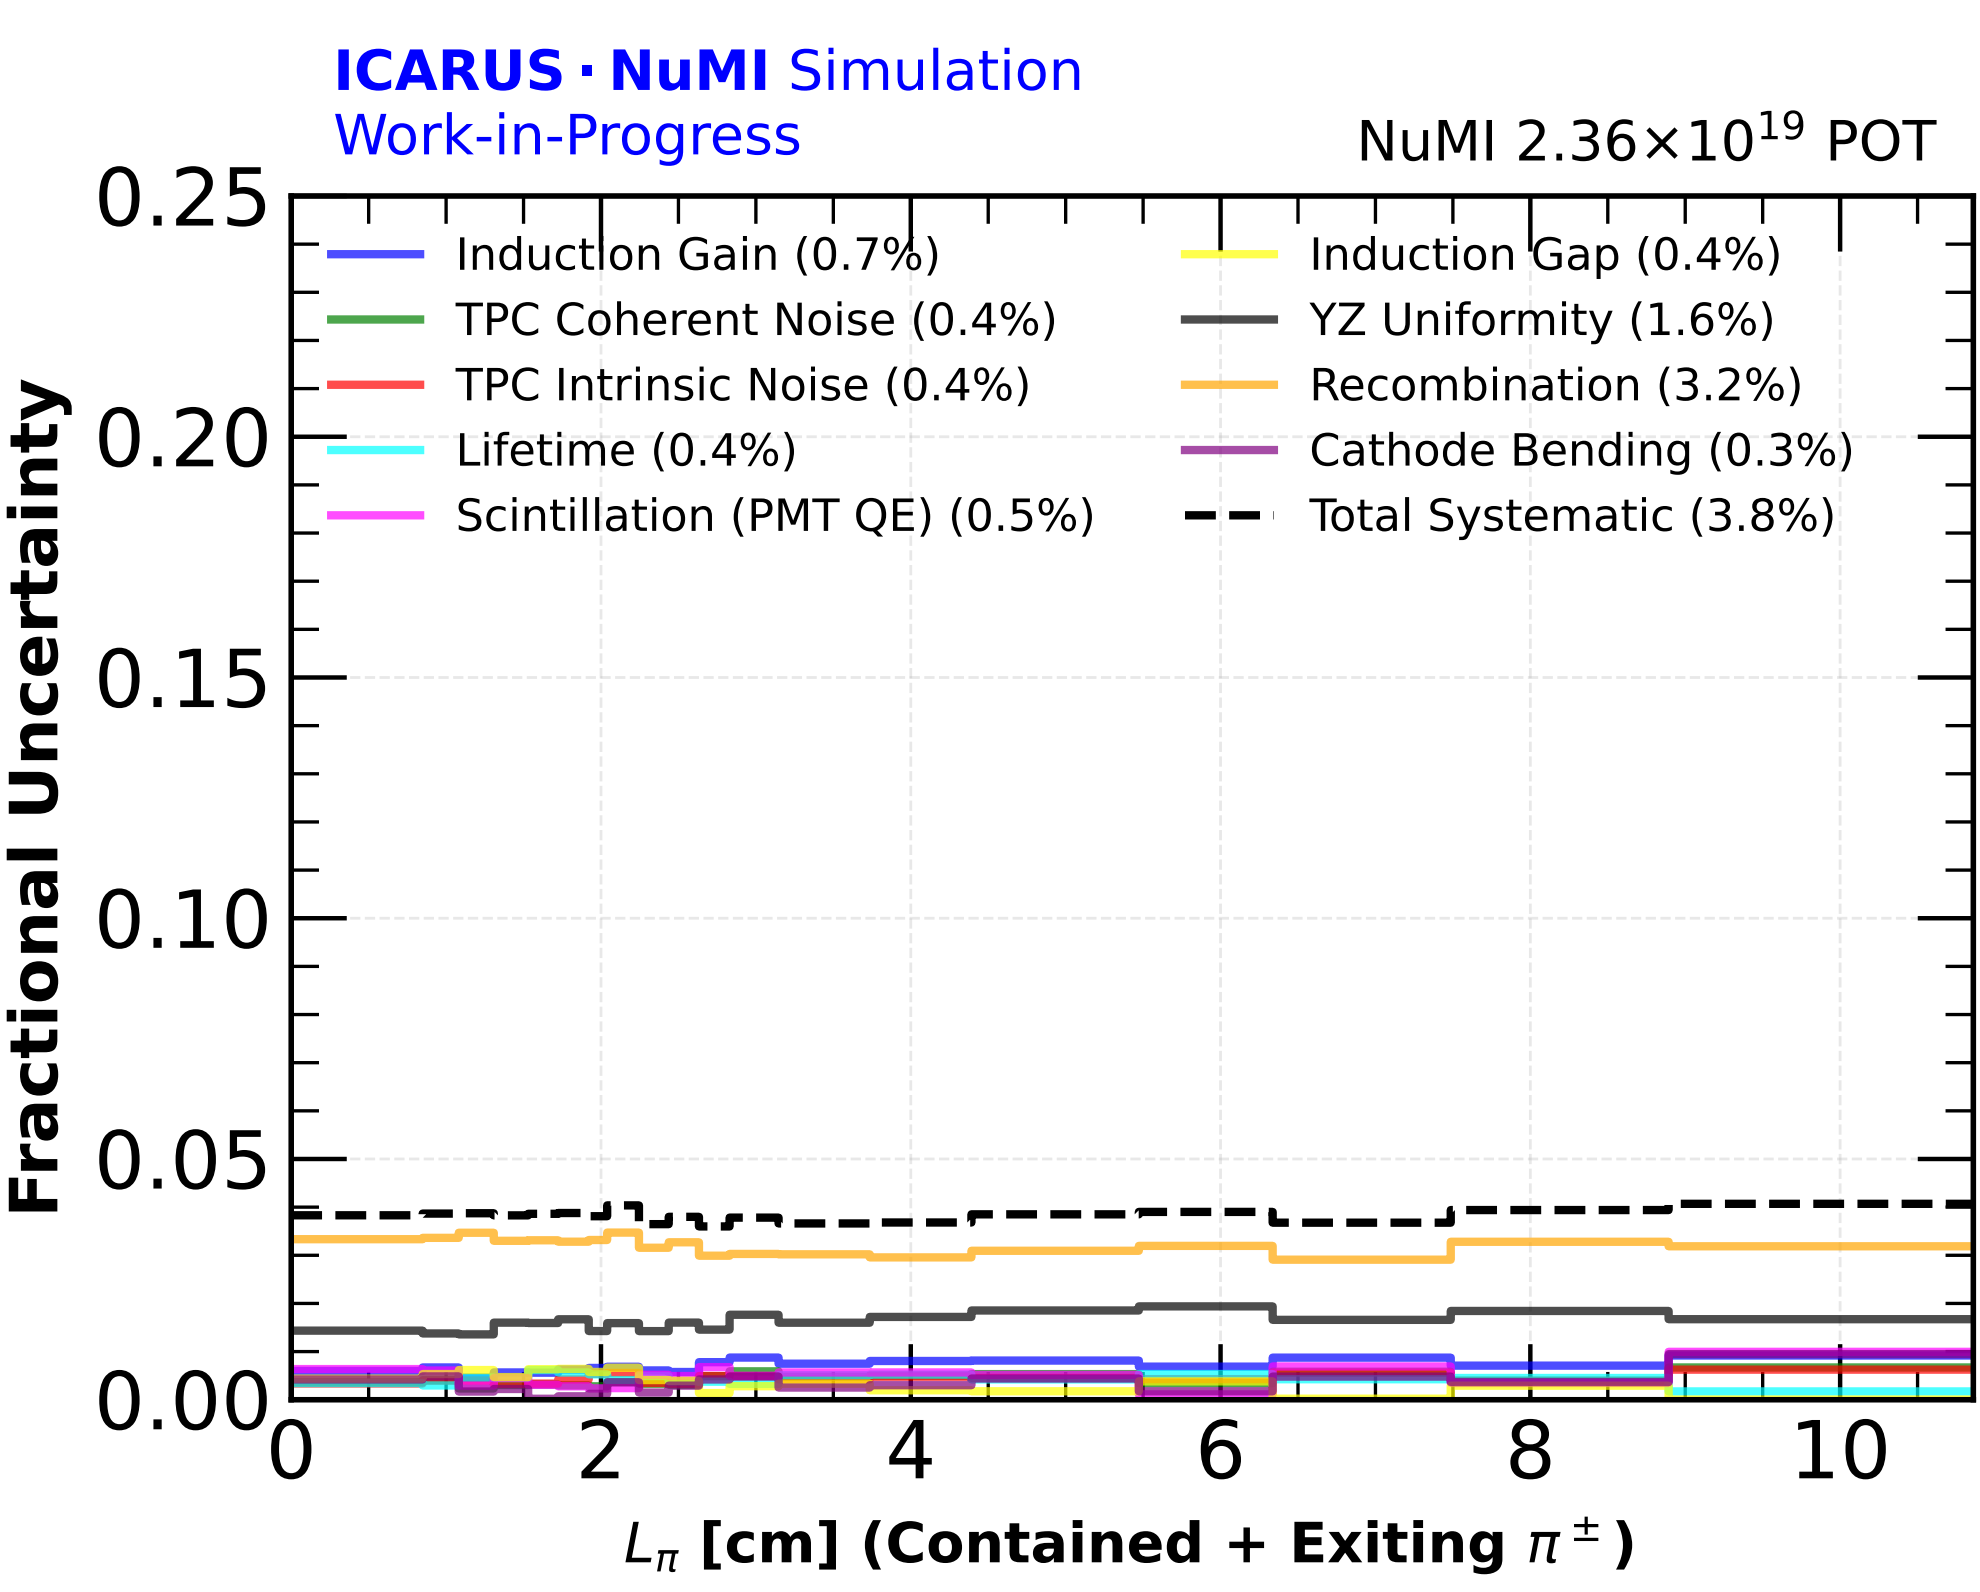
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (0.7%)
TPC Coherent Noise (0.4%)
TPC Intrinsic Noise (0.4%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.5%)
Induction Gap (0.4%)
YZ Uniformity (1.6%)
Recombination (3.2%)
Cathode Bending (0.3%)
Total Systematic (3.8%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
2
4
6
8
10
L_π [cm] (Contained + Exiting $\pi^\pm$)