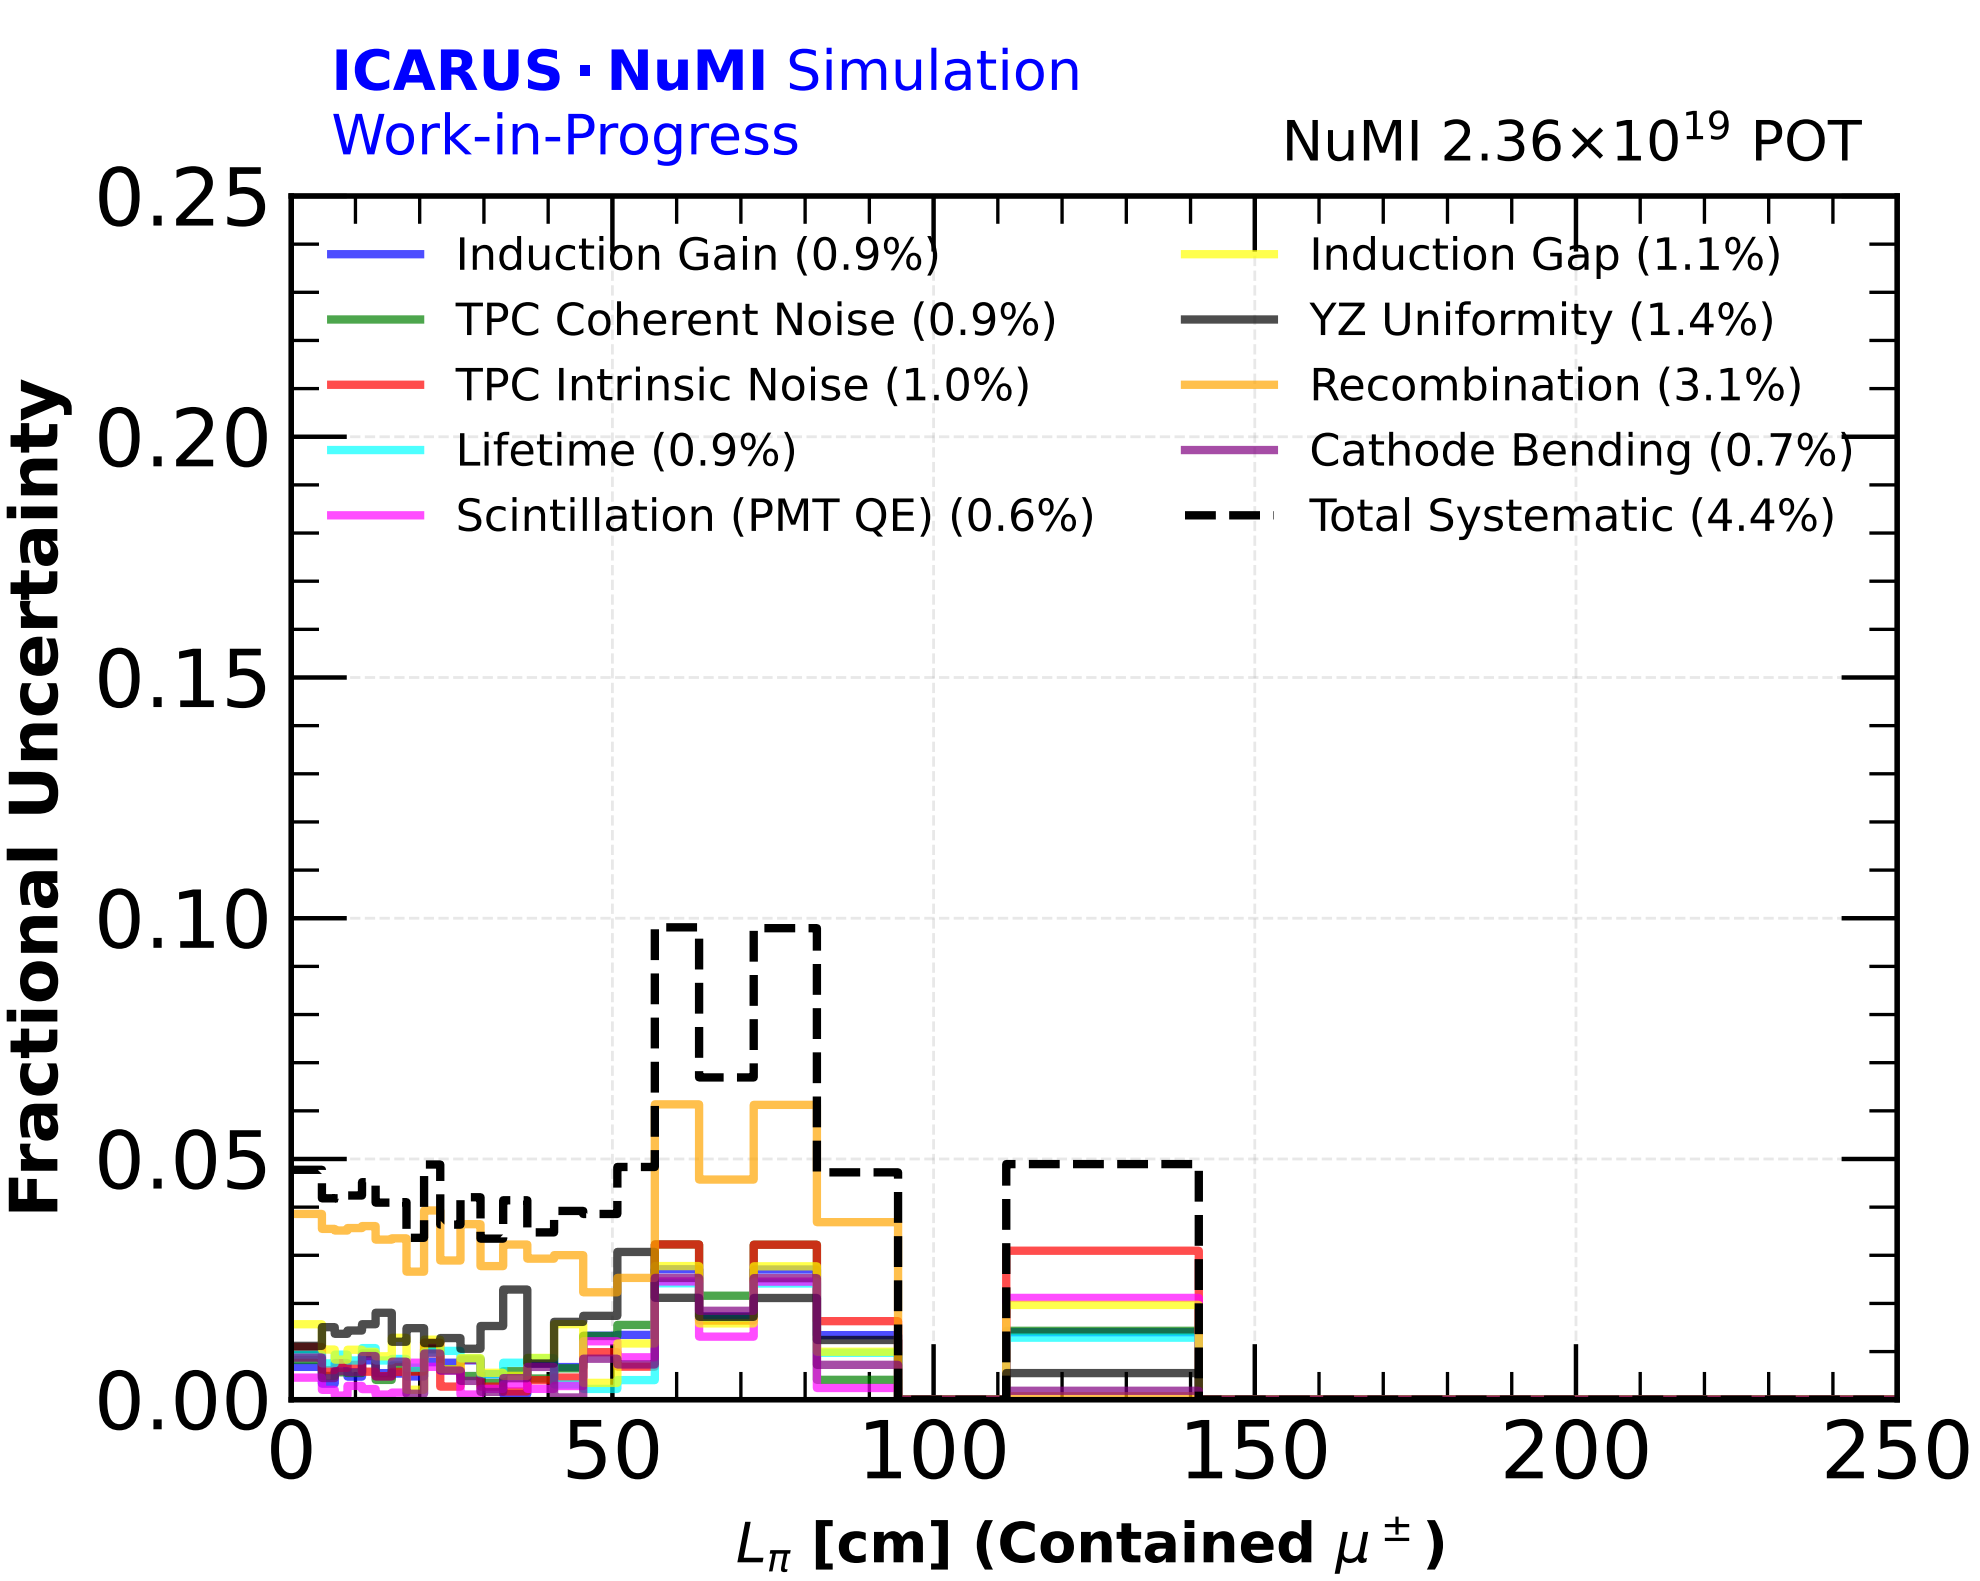
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (0.9%)
TPC Coherent Noise (0.9%)
TPC Intrinsic Noise (1.0%)
Lifetime (0.9%)
Scintillation (PMT QE) (0.6%)
Induction Gap (1.1%)
YZ Uniformity (1.4%)
Recombination (3.1%)
Cathode Bending (0.7%)
Total Systematic (4.4%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
50
100
150
200
250
L_π [cm] (Contained $\mu^\pm$)