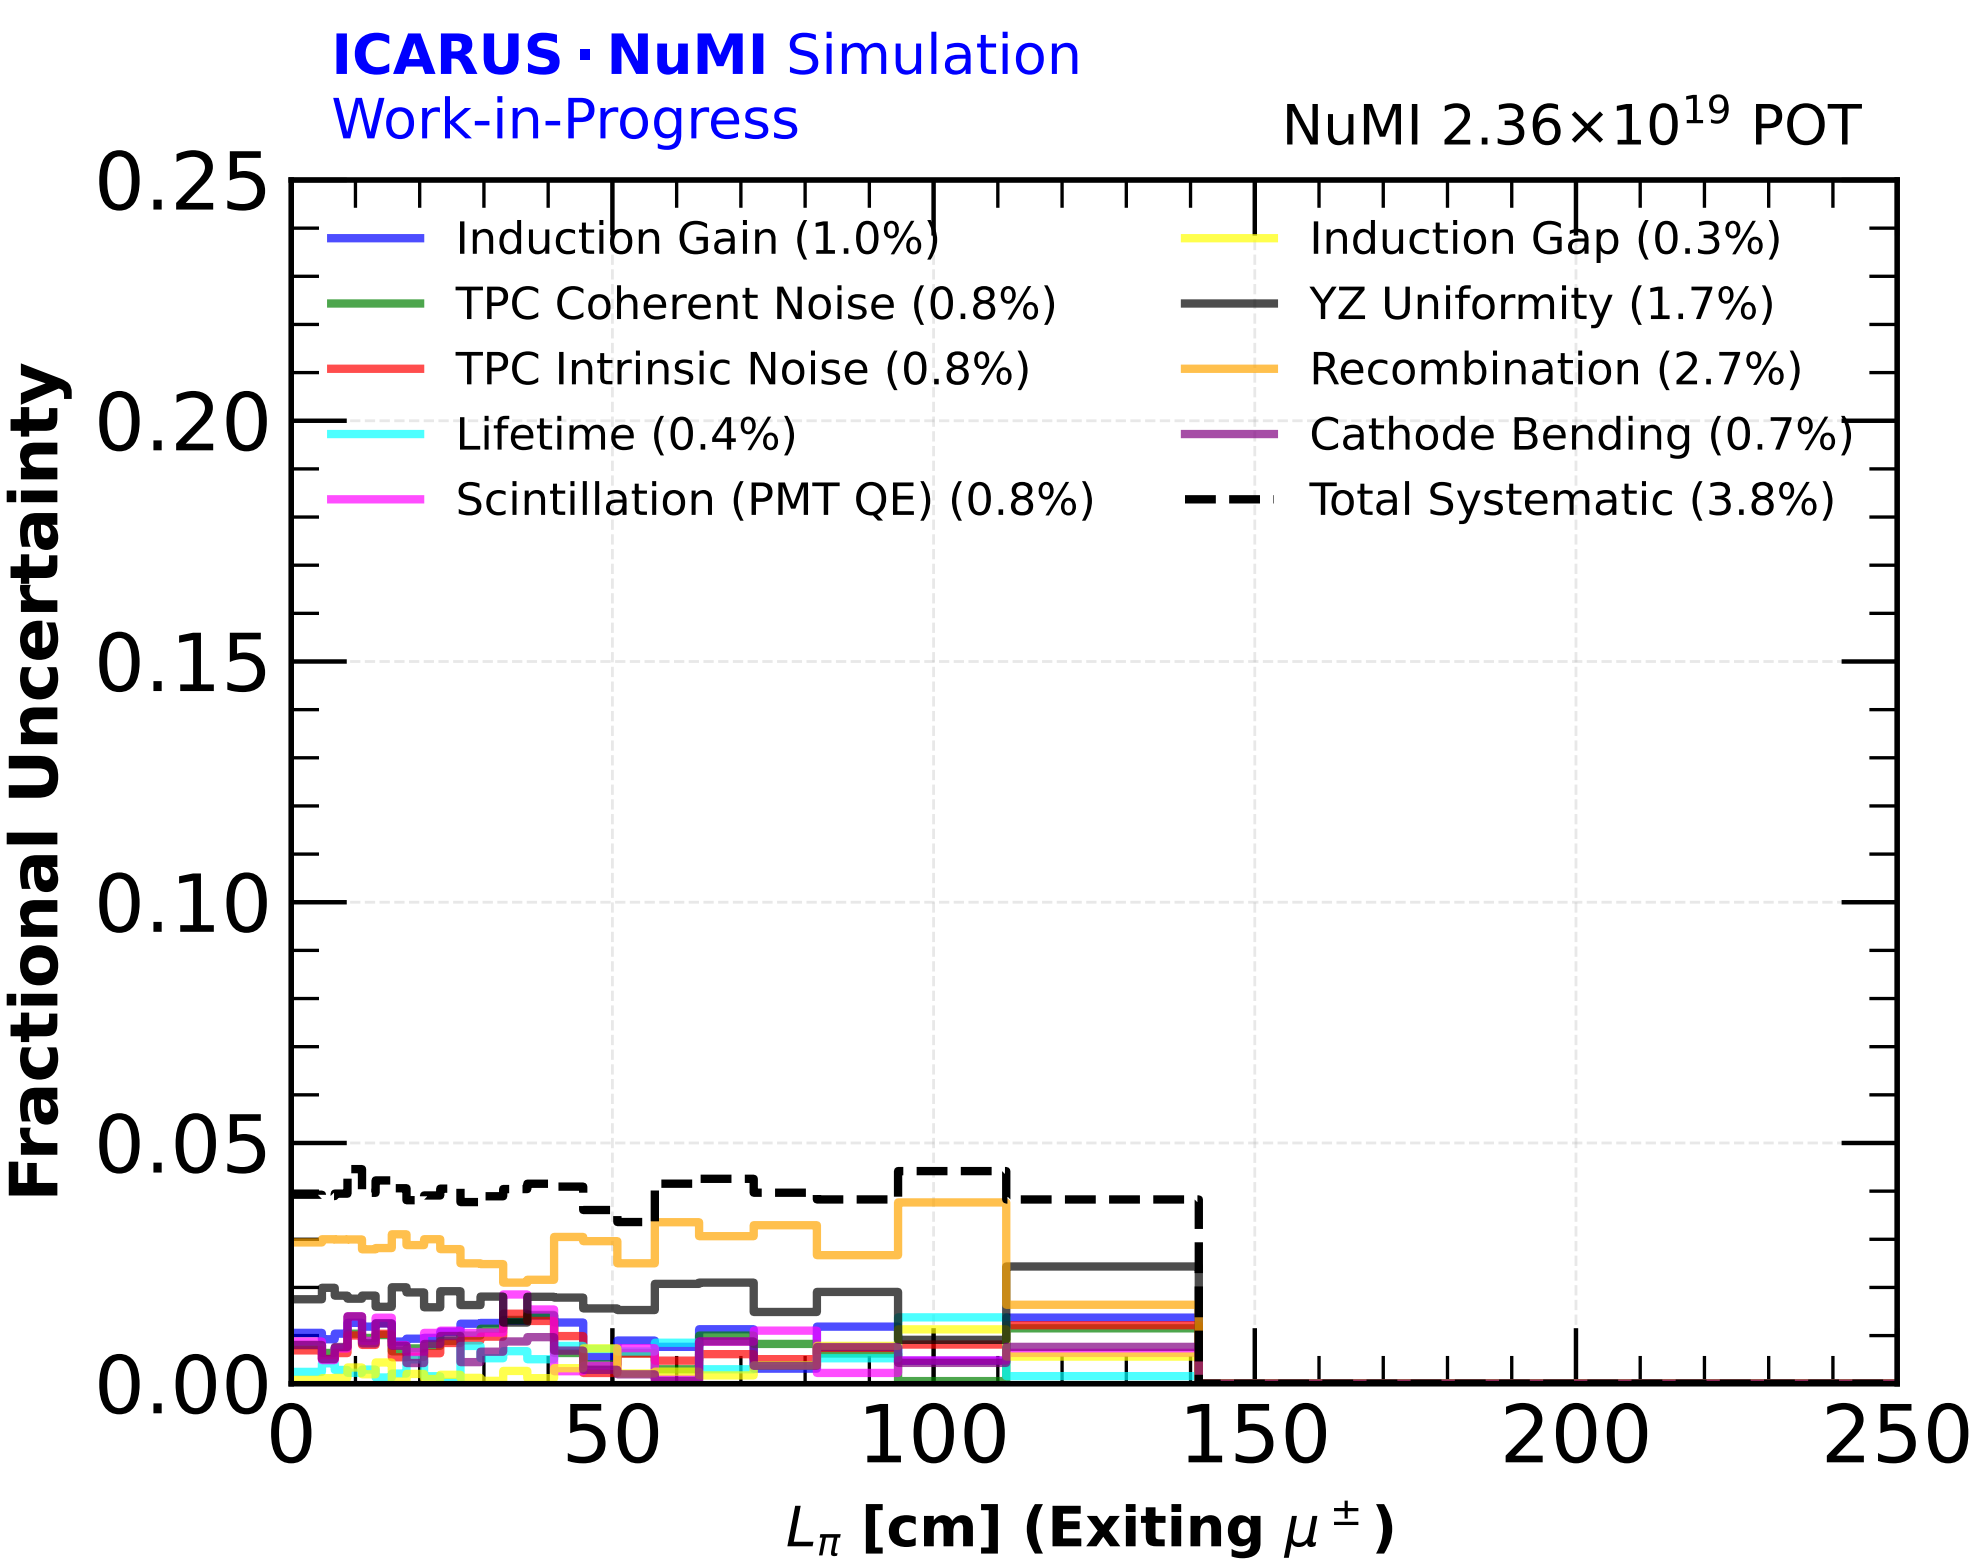
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.0%)
TPC Coherent Noise (0.8%)
TPC Intrinsic Noise (0.8%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.8%)
Induction Gap (0.3%)
YZ Uniformity (1.7%)
Recombination (2.7%)
Cathode Bending (0.7%)
Total Systematic (3.8%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
50
100
150
200
250
L_π [cm] (Exiting $\mu^\pm$)