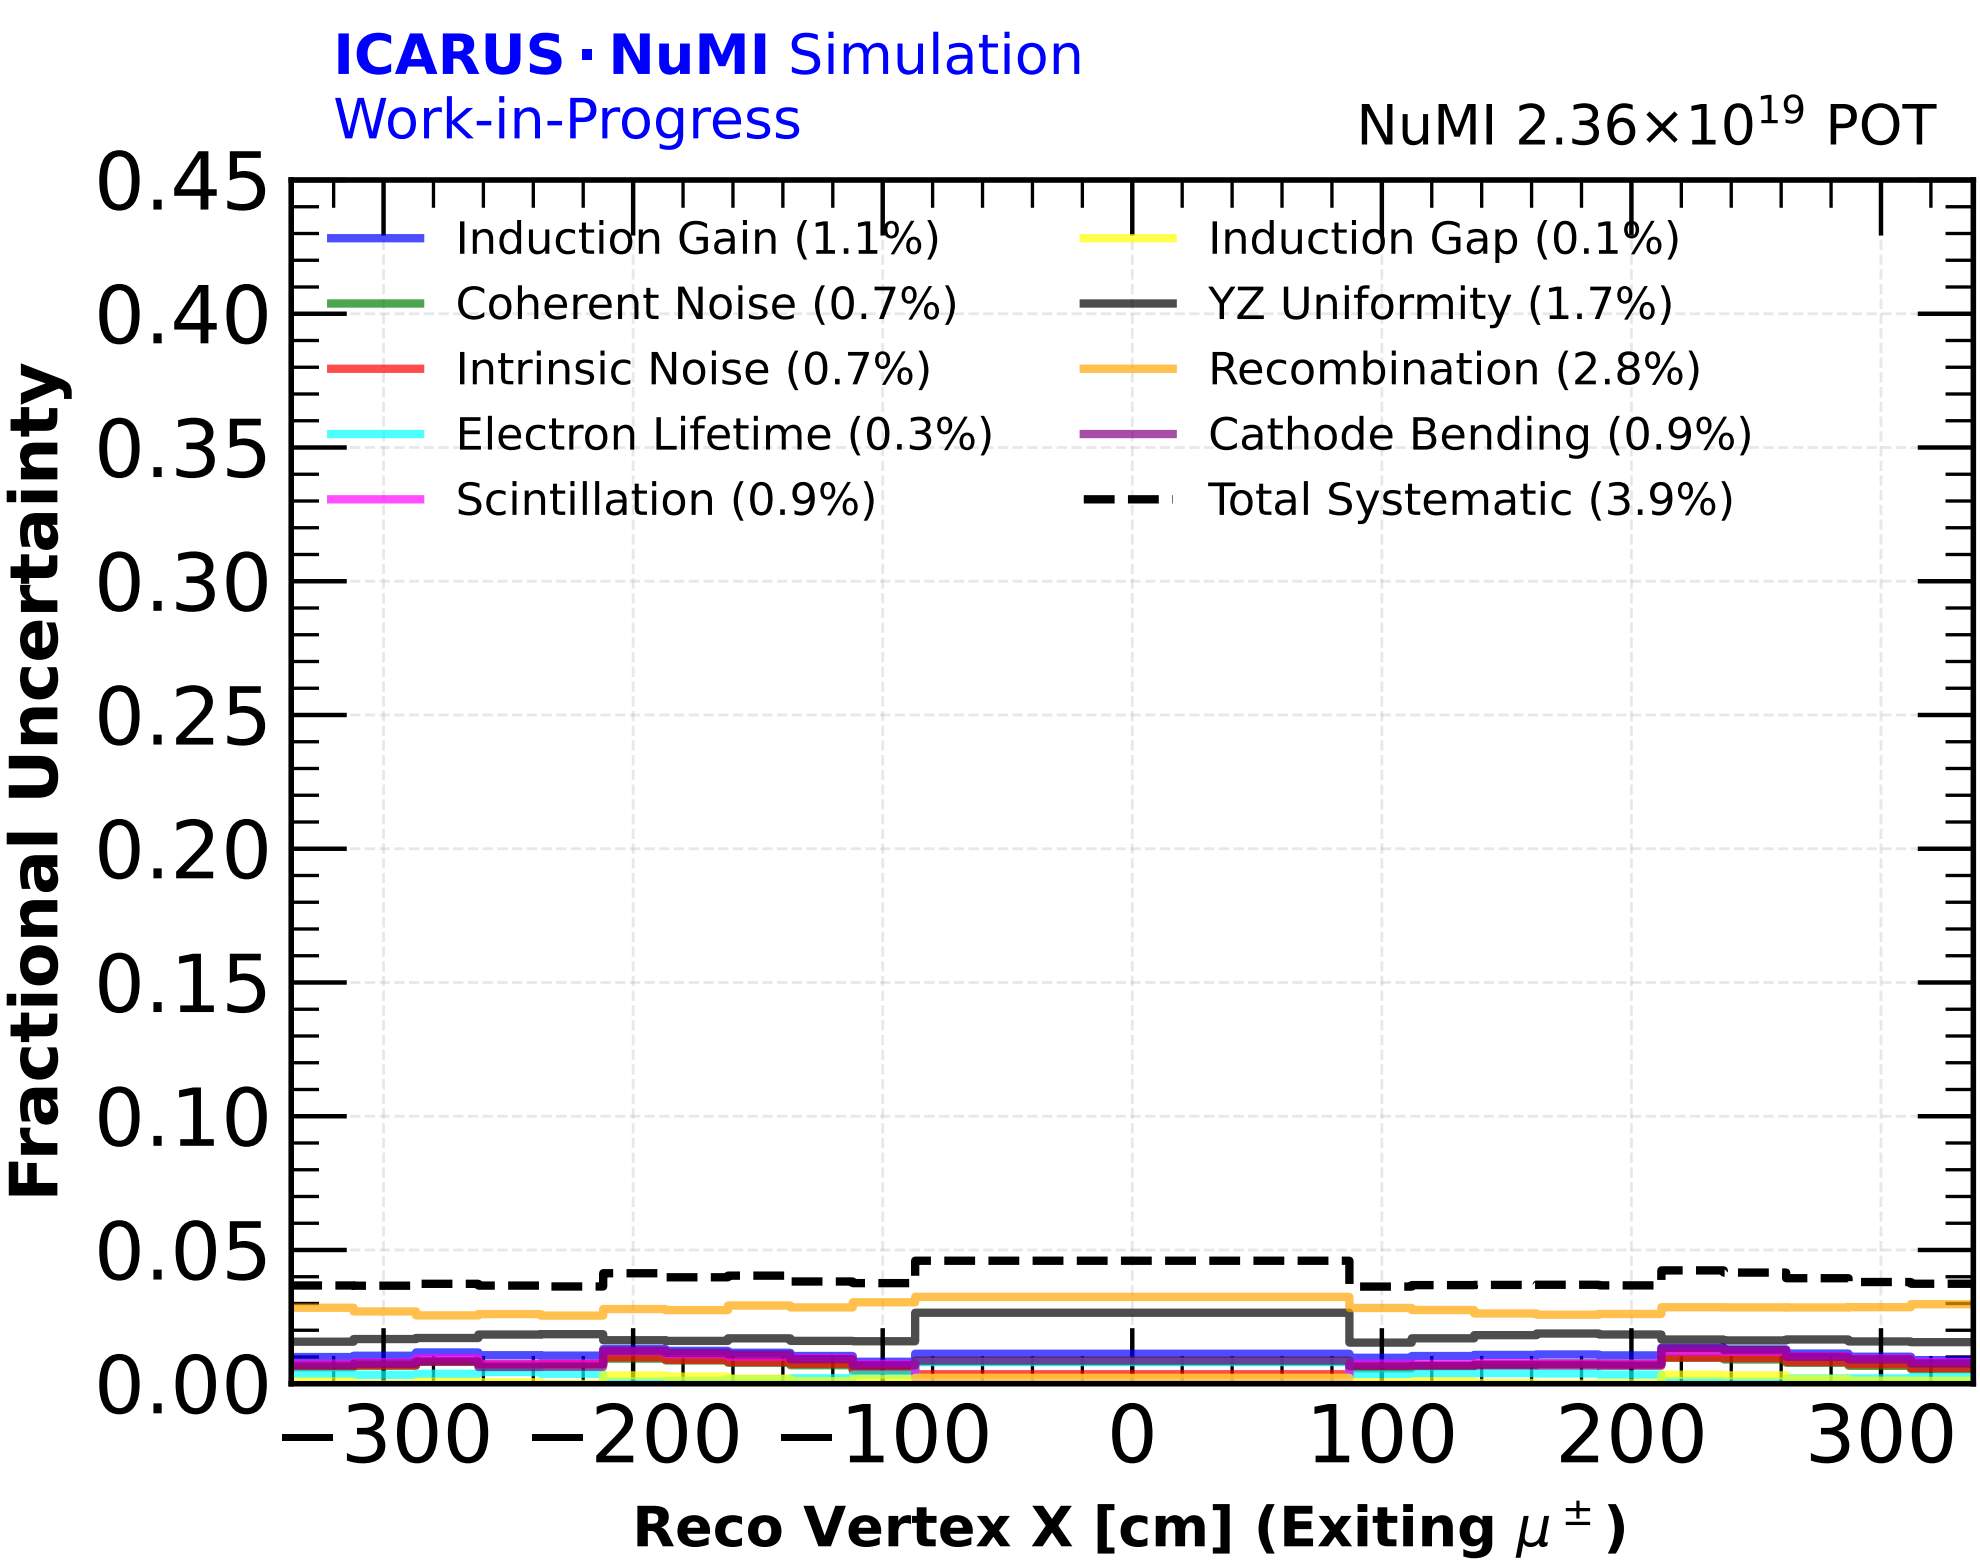
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.1%)
Coherent Noise (0.7%)
Intrinsic Noise (0.7%)
Electron Lifetime (0.3%)
Scintillation (0.9%)
Induction Gap (0.1%)
YZ Uniformity (1.7%)
Recombination (2.8%)
Cathode Bending (0.9%)
Total Systematic (3.9%)
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
−300
−200
−100
0
100
200
300
Reco Vertex X [cm] (Exiting μ±)