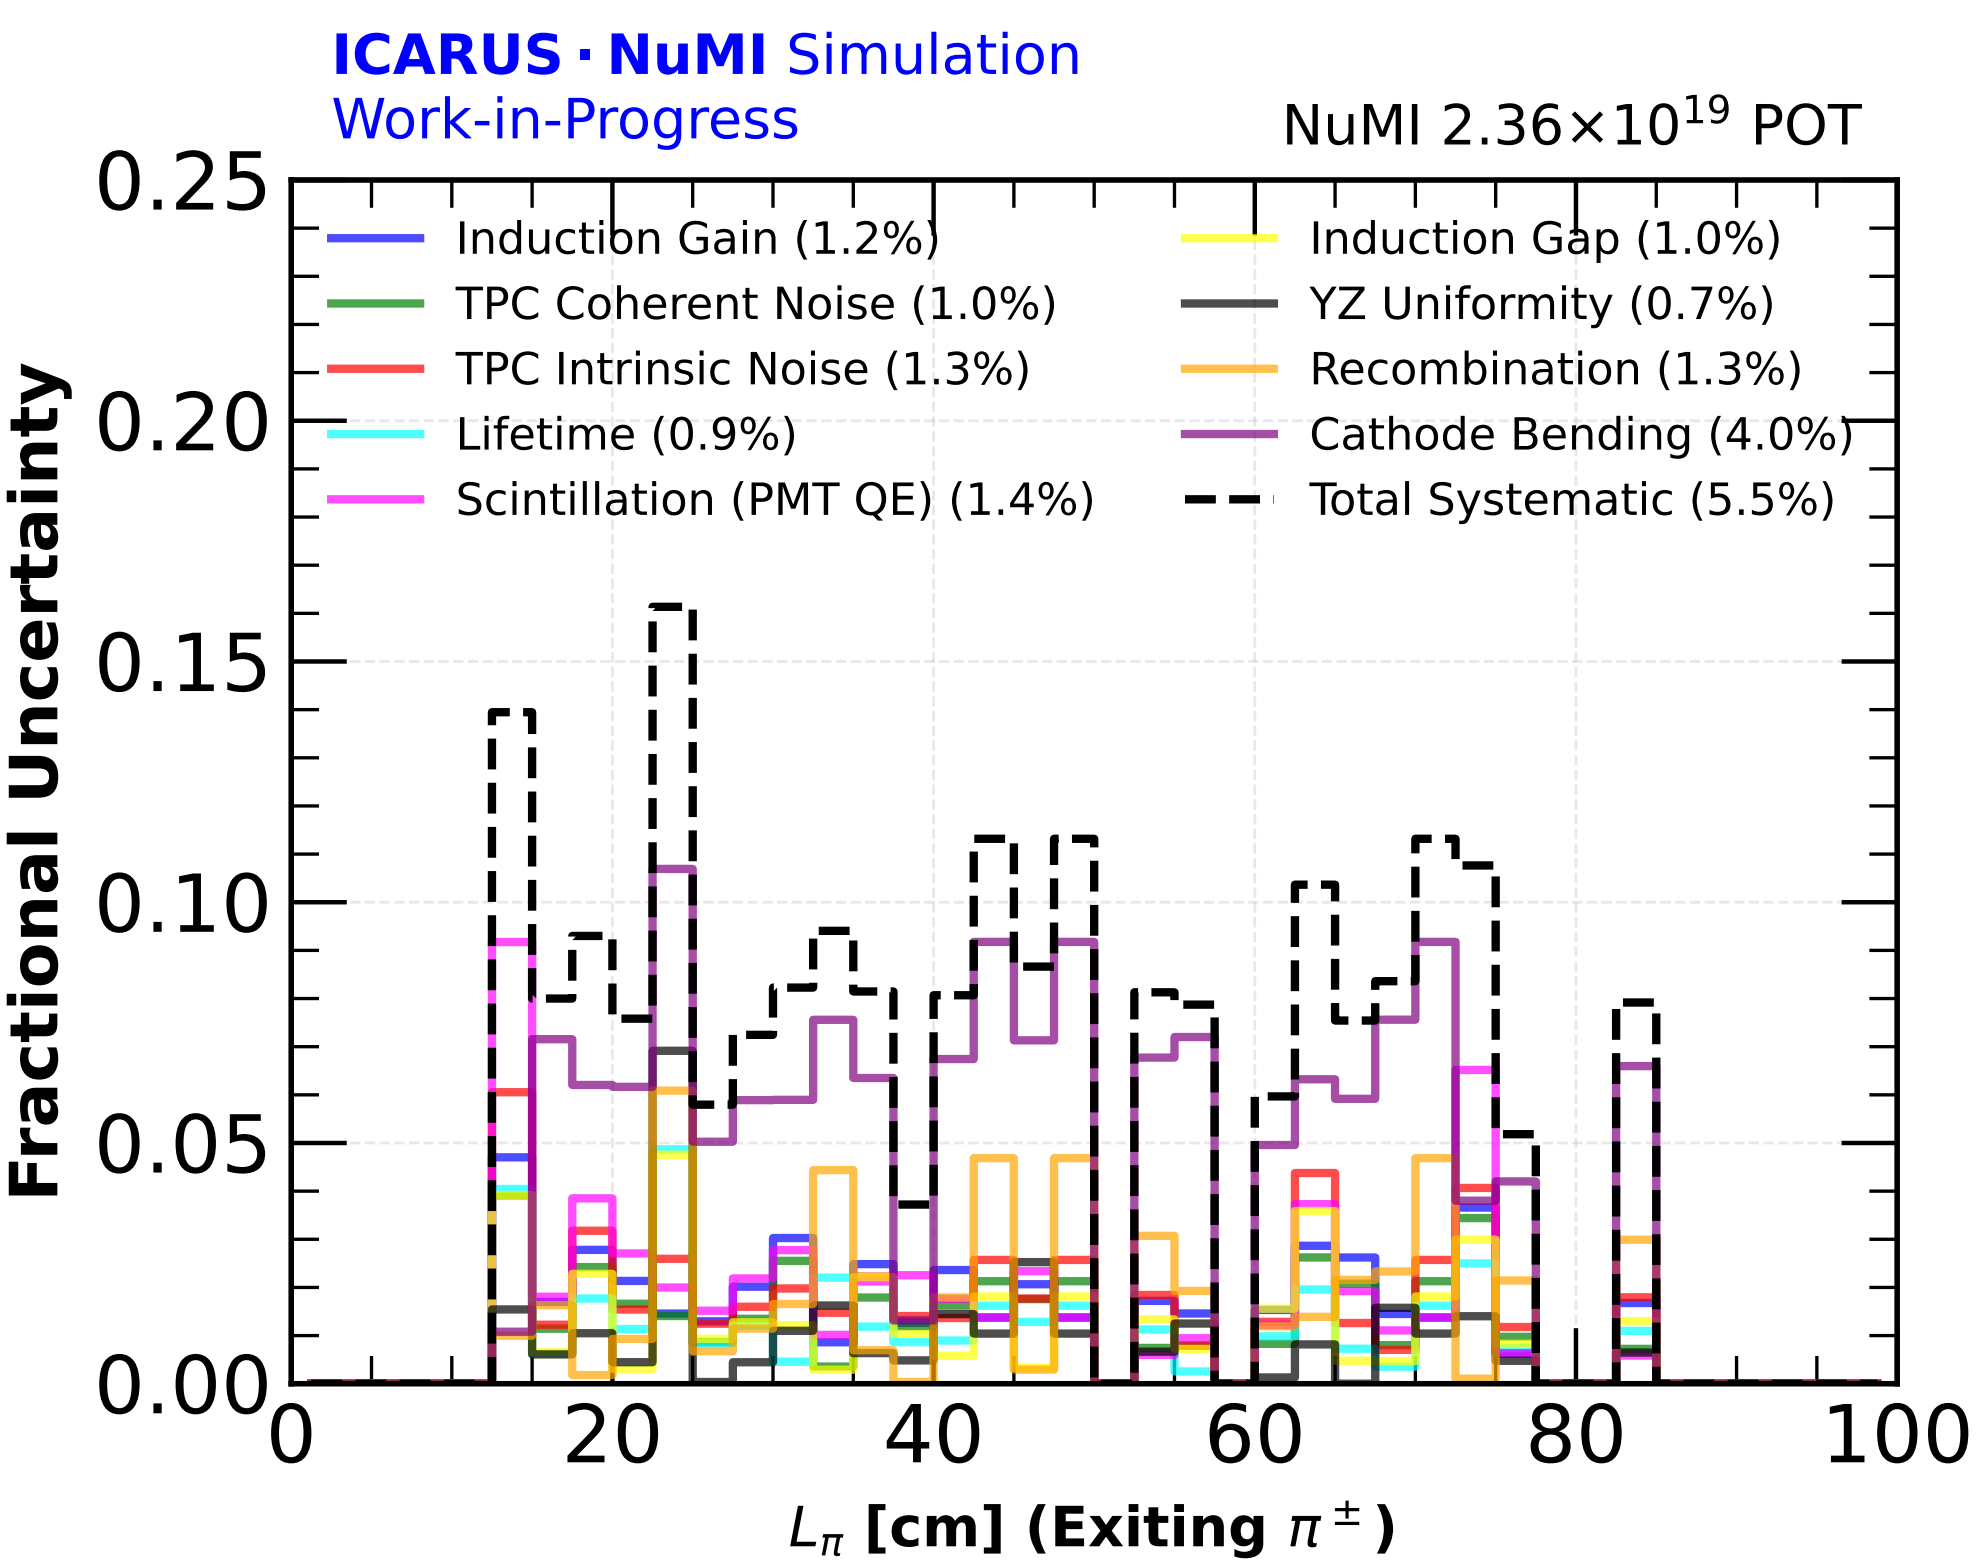
ICARUS · NuMI Simulation
Work-in-Progress
NuMI 2.36×10^19 POT
Induction Gain (1.2%)
TPC Coherent Noise (1.0%)
TPC Intrinsic Noise (1.3%)
Lifetime (0.9%)
Scintillation (PMT QE) (1.4%)
Induction Gap (1.0%)
YZ Uniformity (0.7%)
Recombination (1.3%)
Cathode Bending (4.0%)
Total Systematic (5.5%)
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
0
20
40
60
80
100
L_π [cm] (Exiting $\pi^\pm$)