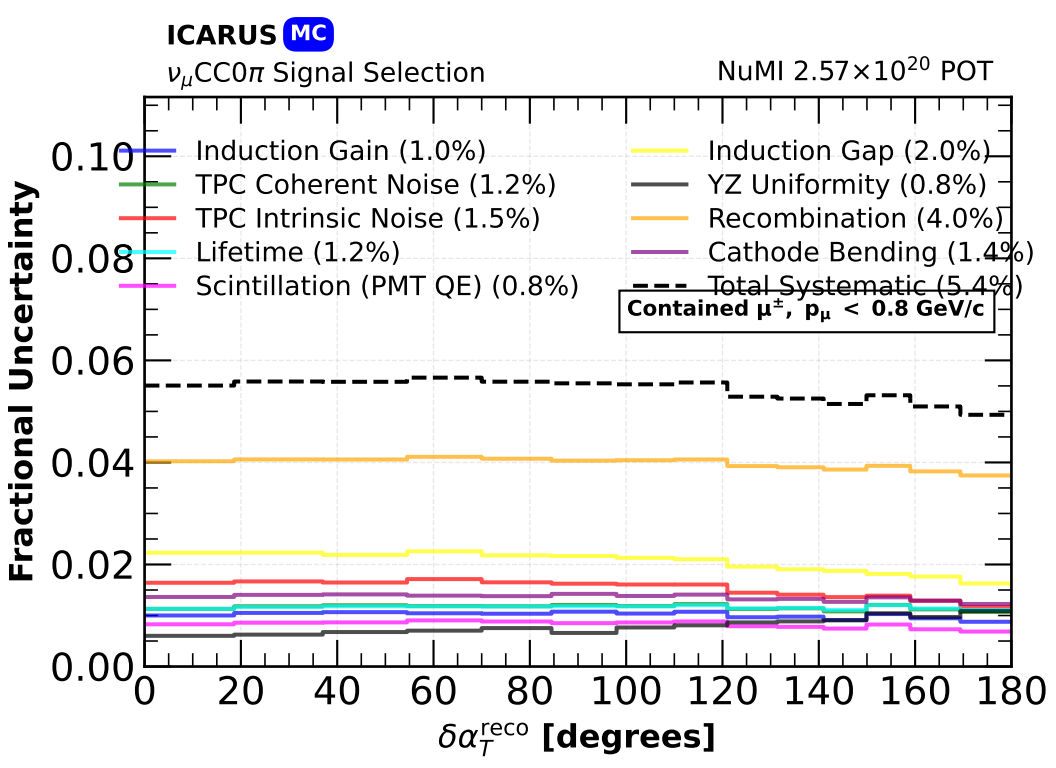
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (1.0%)
TPC Coherent Noise (1.2%)
TPC Intrinsic Noise (1.5%)
Lifetime (1.2%)
Scintillation (PMT QE) (0.8%)
Induction Gap (2.0%)
YZ Uniformity (0.8%)
Recombination (4.0%)
Cathode Bending (1.4%)
Total Systematic (5.4%)
Contained μ±, pμ < 0.8 GeV/c
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0.10
0
20
40
60
80
100
120
140
160
180
$\delta\alpha_T^{\mathrm{reco}}$ [degrees]