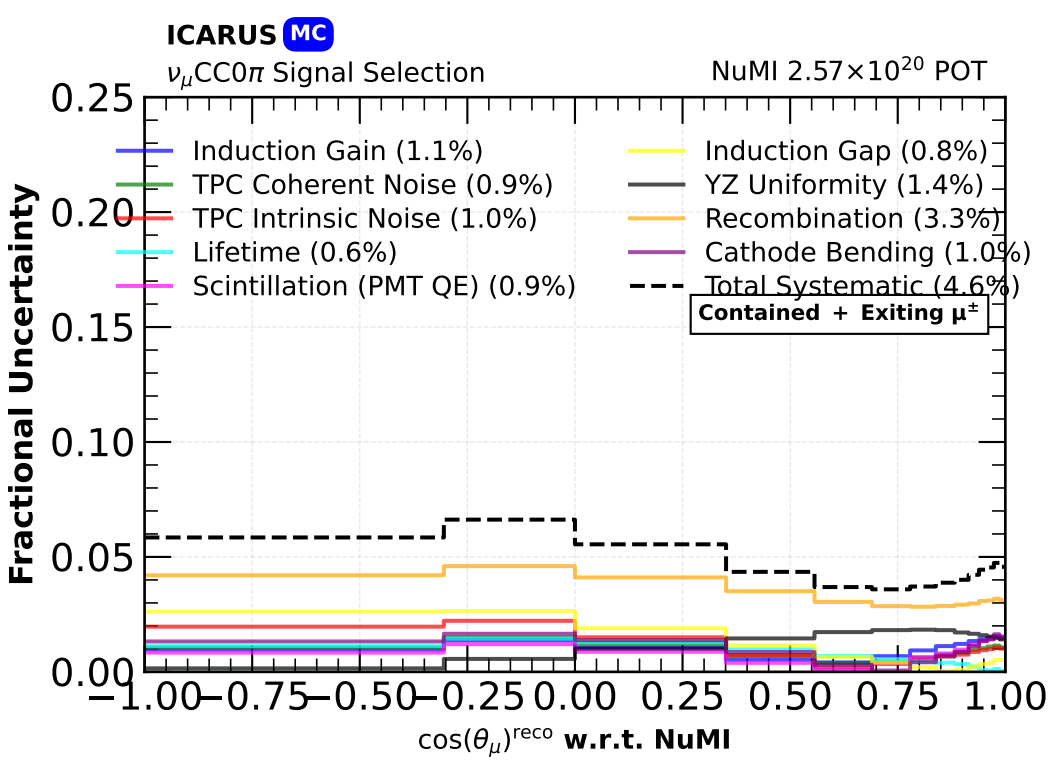
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (1.1%)
TPC Coherent Noise (0.9%)
TPC Intrinsic Noise (1.0%)
Lifetime (0.6%)
Scintillation (PMT QE) (0.9%)
Induction Gap (0.8%)
YZ Uniformity (1.4%)
Recombination (3.3%)
Cathode Bending (1.0%)
Total Systematic (4.6%)
Contained + Exiting μ±
Fractional Uncertainty
0.25
0.20
0.15
0.10
0.05
0.00
−1.00
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
1.00
cos(θ_μ)$^{\text{reco}}$ w.r.t. NuMI