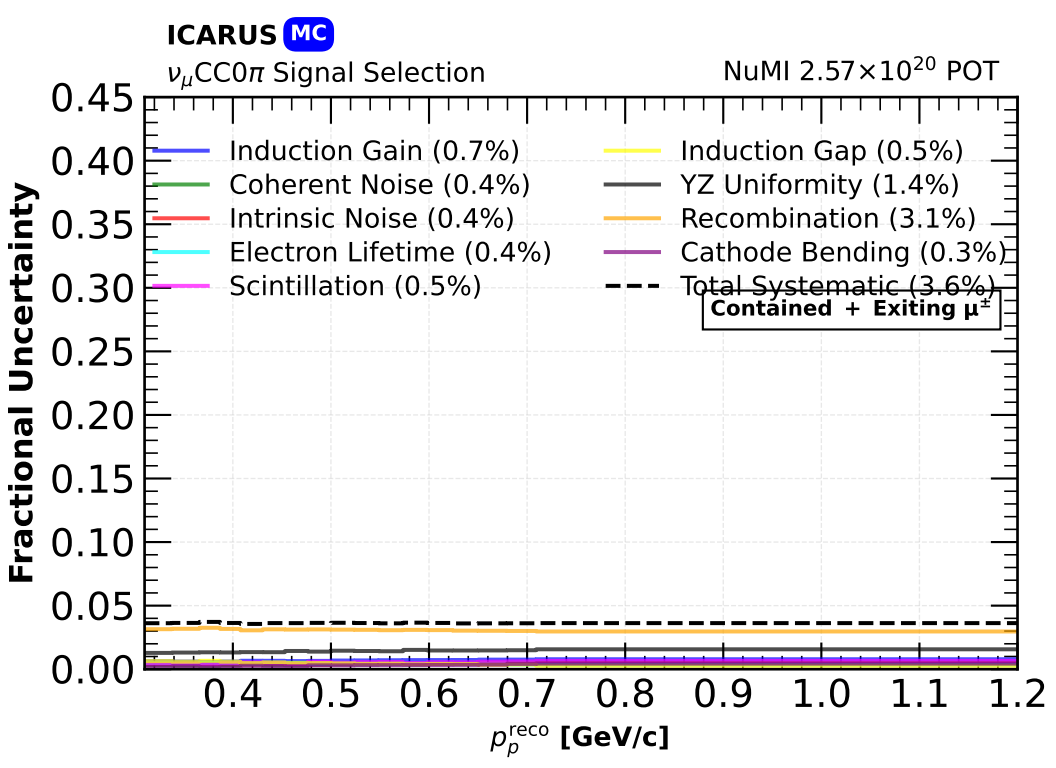
ICARUS MC
ν_μCC0π Signal Selection
NuMI 2.57×10^{20} POT
Induction Gain (0.7%)
Coherent Noise (0.4%)
Intrinsic Noise (0.4%)
Electron Lifetime (0.4%)
Scintillation (0.5%)
Induction Gap (0.5%)
YZ Uniformity (1.4%)
Recombination (3.1%)
Cathode Bending (0.3%)
Total Systematic (3.6%)
Contained + Exiting μ$^\pm$
Fractional Uncertainty
0.45
0.40
0.35
0.30
0.25
0.20
0.15
0.10
0.05
0.00
0.4
0.5
0.6
0.7
0.8
0.9
1.0
1.1
1.2
p_p^{reco} [GeV/c]