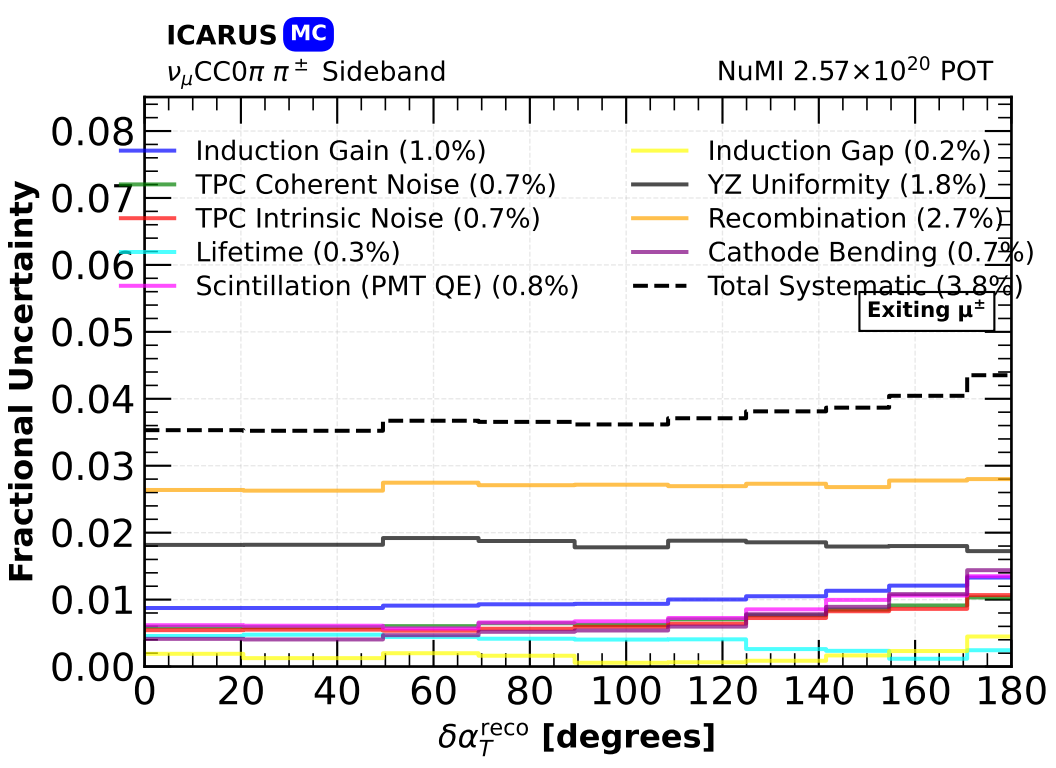
ICARUS MC
ν_μCC0π $\pi^\pm$ Sideband
NuMI 2.57×10^{20} POT
Induction Gain (1.0%)
TPC Coherent Noise (0.7%)
TPC Intrinsic Noise (0.7%)
Lifetime (0.3%)
Scintillation (PMT QE) (0.8%)
Induction Gap (0.2%)
YZ Uniformity (1.8%)
Recombination (2.7%)
Cathode Bending (0.7%)
Total Systematic (3.8%)
Exiting μ$^\pm$
Fractional Uncertainty
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0.08
0
20
40
60
80
100
120
140
160
180
$\delta\alpha_T^{\text{reco}}$ [degrees]