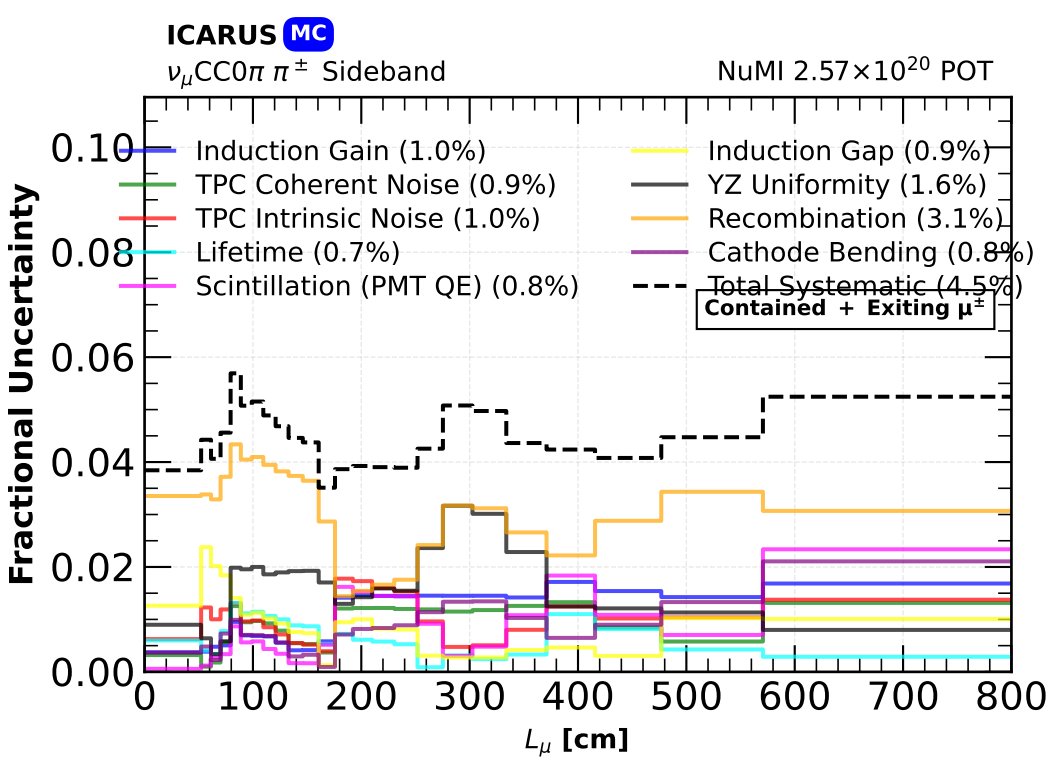
ICARUS MC
$\nu_\mu$CC0$\pi$ $\pi^\pm$ Sideband
NuMI 2.57×10$^{20}$ POT
Induction Gain (1.0%)
TPC Coherent Noise (0.9%)
TPC Intrinsic Noise (1.0%)
Lifetime (0.7%)
Scintillation (PMT QE) (0.8%)
Induction Gap (0.9%)
YZ Uniformity (1.6%)
Recombination (3.1%)
Cathode Bending (0.8%)
Total Systematic (4.5%)
Contained + Exiting μ±
Fractional Uncertainty
0.10
0.08
0.06
0.04
0.02
0.00
0
100
200
300
400
500
600
700
800
$L_\mu$ [cm]