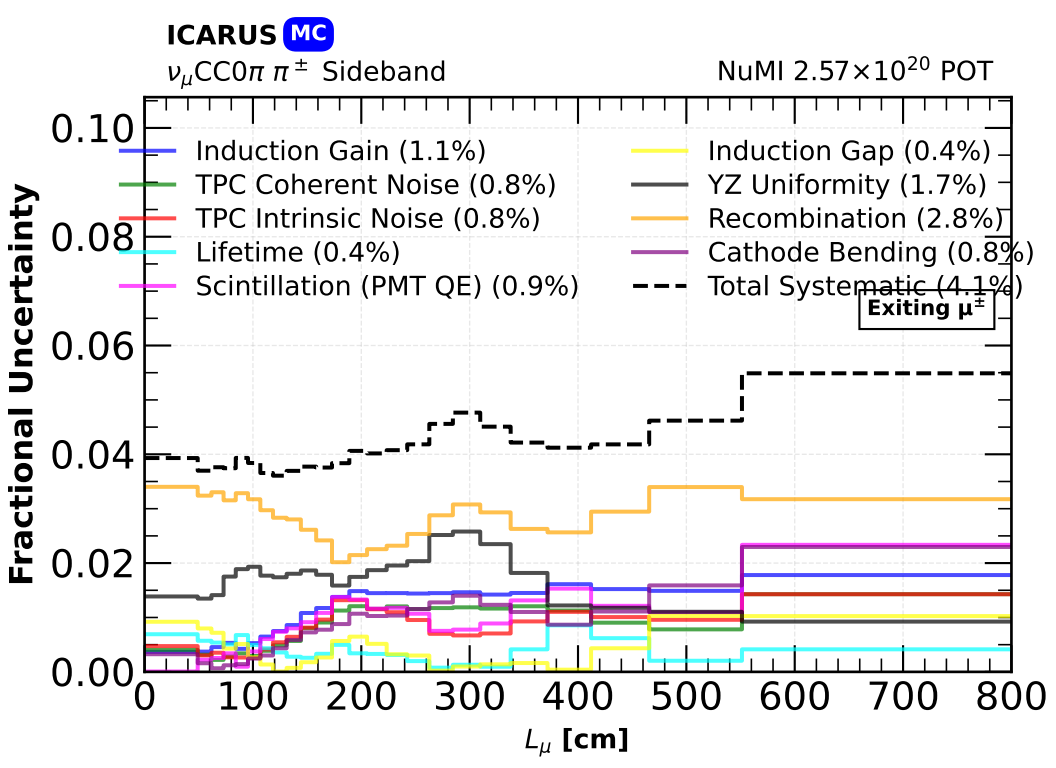
ICARUS MC
$\nu_\mu$CC0$\pi$ $\pi^\pm$ Sideband
NuMI 2.57×10$^{20}$ POT
Induction Gain (1.1%)
TPC Coherent Noise (0.8%)
TPC Intrinsic Noise (0.8%)
Lifetime (0.4%)
Scintillation (PMT QE) (0.9%)
Induction Gap (0.4%)
YZ Uniformity (1.7%)
Recombination (2.8%)
Cathode Bending (0.8%)
Total Systematic (4.1%)
Exiting μ±
Fractional Uncertainty
0.00
0.02
0.04
0.06
0.08
0.10
0
100
200
300
400
500
600
700
800
$L_\mu$ [cm]